

Part C T856 Transmitter & T857 Exciter

This part of the manual is divided into six sections, as listed below. There is a detailed table of contents at the start of each section.

Section	Title
1	General Information
2	Circuit Operation
3	Initial Tuning & Adjustment
4	Functional Testing
5	Fault Finding
6	PCB Information

1 T856/857 General Information

This section provides a brief description of the T856 transmitter and T857 exciter, along with detailed specifications and a list of types available.

The following topics are covered in this section.

Section	Title	Page
1.1	Introduction	1.7
1.2	Specifications	1.8
1.2.1	Introduction	1.8
1.2.2	General	1.8
1.2.3	RF Section	1.9
1.2.4	Audio Processor	1.10
1.2.4.1	Inputs	1.10
1.2.4.2	Modulation Characteristics	1.11
1.2.4.3	CTCSS	1.11
1.2.5	Microcontroller	1.11
1.2.6	Test Standards	1.12
1.2.6.1	European Telecommunication Standard	1.12
1.2.6.2	DTI CEPT Recommendation T/R-24-01	1.12
1.2.6.3	Telecommunications Industry Association	1.12
1.3	Product Codes	1.13
1.4	T856 Standard Product Range	1.14
1.5	T857 Standard Product Range	1.15

Figure	Title	Page
1.1	T856 Main Circuit Block Identification	1.4
1.2	T856 Front Panel Controls	1.4
1.3	T857 Main Circuit Block Identification	1.6
1.4	T857 Front Panel Controls	1.6

replace A4 pages C1.3/C1.4 with A3 pages C1.3/C1.4

replace A4 pages C1.3/C1.4 with A3 pages C1.3/C1.4

replace A4 pages C1.5/C1.6 with A3 pages C1.5/C1.6

replace A4 pages C1.5/C1.6 with A3 pages C1.5/C1.6

1.1 Introduction

The T856 is a synthesised, microprocessor controlled FM base station transmitter designed for single or multichannel operation in the 400 to 520MHz frequency range¹ with a standard power output of 25W. The RF section of the transmitter comprises a frequency synthesiser which provides 100mW of frequency modulated RF drive to a two stage, wide band output driver followed by a 25W power amplifier. A thermal shut-down feature is provided in the T856 in case operating temperatures exceed acceptable levels.

The T857 is a synthesised, microprocessor controlled FM base station exciter designed for single or multichannel operation in the 400 to 520MHz frequency range¹. With a standard power output of only 1W, the exciter is designed for use with the T858 50W or T859 100W power amplifiers. The RF section of the exciter comprises a frequency synthesiser which provides 100mW of frequency modulated RF drive to a two stage, wide band output amplifier.

A wide selection of audio characteristics may be obtained from the audio processor. Optional circuit blocks are an audio compressor and a pre-emphasis stage. They can be bypassed or linked to one or both audio inputs, and then back into the remaining audio circuitry in almost any combination. All audio processor options are link selectable.

The synthesiser frequency is programmed via the serial communications port. Eight channel select lines are accessible via an optional D-range connector (D-range 2 - T800-03-0000) at the rear of the set.

All components except those of the VCO are mounted on a single PCB. This is secured to a die-cast chassis which is divided into compartments to individually shield each section of circuitry. Access to both sides of the main circuit board is obtained by removing each of the chassis lids. There is provision within the chassis to mount small option PCBs.

The front panel controls include line sensitivity, microphone socket and carrier switch. This switch turns on the carrier (unmodulated) as an aid to servicing.

The T856 and T857 are both 60mm wide and each occupies a single space in a Tait rack frame, which has the ability to accommodate up to seven standard modules.

1. Although capable of operating over the 400-520MHz frequency range, the T856 and T857 have an 8MHz switching range (see [Section 1.2.3](#) and [Section 3.1](#)).

1.2 Specifications

1.2.1 Introduction

The performance figures given are minimum figures, unless otherwise indicated, for equipment tuned with the maximum switching range and operating at standard room temperature (+22°C to +28°C) and standard test voltage (13.8V DC).

Where applicable, the test methods used to obtain the following performance figures are those described in the EIA and ETS specifications. However, there are several parameters for which performance according to the CEPT specification is given. Refer to [Section 1.2.6](#) for details of test standards.

Details of test methods and the conditions which apply for Type Approval testing in all countries can be obtained from Tait Electronics Ltd.

The terms "wide bandwidth", "mid bandwidth" and "narrow bandwidth" used in this and following sections are defined in the following table.

	Channel Spacing	Modulation 100% Deviation	Receiver IF Bandwidth
Wide Bandwidth	25kHz	±5.0kHz	15.0kHz
Mid Bandwidth	20kHz	±4.0kHz	12.0kHz
Narrow Bandwidth	12.5kHz	±2.5kHz	7.5kHz

1.2.2 General

Number Of Channels .. 128 (standard)¹

Supply Voltage:

Operating Voltage	.. 10.8 to 16V DC
Standard Test Voltage	.. 13.8V DC
Polarity	.. negative earth only
Polarity Protection	.. crowbar diode
Line Keying Supply (if required)	.. -50V DC

Supply Current:

Transmit	- T856	.. 5.5A (typical)
	- T857	.. 750mA
Standby	- T856	.. 165mA (typical)
	- T857	.. 150mA (typical)

Operating Temperature Range .. -20°C to +60°C

1. Additional channels may be factory programmed. Contact your nearest Tait Dealer or Customer Service Organisation.

Dimensions:

Height	.. 183mm
Width	.. 60mm
Length	.. 322mm
Weight	.. 2.1kg
Time-Out Timer (optional)	.. 0 to 5 minutes ¹ adjustable in 10 second steps
Tail Timer	.. 0 to 5 seconds adjustable in 100ms ² steps
Transmit Key Time	.. <30ms
Transmit Lockout Timer	.. 0 to 1 minute adjustable in 10 second steps

1.2.3 RF Section

Frequency Range	.. 400-520MHz (refer to Section 1.4 and Section 1.5)
Modulation Type	.. FM
Frequency Increment	.. 5 or 6.25kHz
Switching Range	.. 8MHz (i.e. ± 4 MHz from the centre frequency)
Load Impedance	.. 50 ohms
Frequency Stability (see also Section 1.4 and Section 1.5)	.. ± 1 ppm, -20°C to +60°C
Adjacent Channel Power (full deviation):	
Wide Bandwidth (WB) (± 25 kHz/15kHz B/W)	.. -75dBc
Mid Bandwidth (MB) (± 20 kHz/12kHz B/W)	.. -70dBc
Narrow Bandwidth (NB) (± 12.5 kHz/7.5kHz B/W)	.. -65dBc
Transmitter Switching	.. complies with ETS 300 113

-
1. Adjustable from 0 to 10 minutes in PGM800Win version 2.12 and later.
 2. Adjustable in 20ms steps in PGM800Win version 2.12 and later.

Transmitter Side Band Noise:
(no modulation, 15kHz bandwidth)

At $\pm 25\text{kHz}$.. -95dBc
At $\pm 1\text{MHz}$.. -105dBc

Intermodulation	.. -40dBc with interfering signal of -30dBc
	.. -70dBc with 25dB isolation & interfering signal of -30dBc (PA with output isolator)

T856 Mismatch Capability:

Ruggedness	.. refer to your nearest Tait Dealer or Customer Service Organisation
Stability	.. 3:1 VSWR (all phase angles)

Radiated Spurious Emissions:

Transmit	.. -36dBm to 1GHz -30dBm 1GHz to 4GHz
Standby	.. -57dBm to 1GHz -47dBm 1GHz to 4GHz

Conducted Spurious Emissions: (T856 Only)

Transmit	.. -36dBm to 1GHz -30dBm 1GHz to 4GHz
Standby	.. -57dBm to 1GHz -47dBm 1GHz to 4GHz

Power Output:

T856	- Rated Power	.. 25W (see Duty Cycle)
	- Range Of Adjustment	.. 5-25W
T857		.. 1W $\pm 300\text{mW}$

Duty Cycle (T856 Only)	.. 100% @ 25W at +25°C
	.. 25% @ 25W at +60°C
	.. 100% @ 10W at +40°C

1.2.4 Audio Processor

1.2.4.1 Inputs

Inputs Available	.. line, microphone and CTCSS
------------------	-------------------------------

Line Input:

Impedance	.. 600 ohms (balanced)
Sensitivity (60% modulation @ 1kHz)-	
With Compressor	.. -50dBm
Without Compressor	.. -30dBm

Microphone Input:

Impedance	.. 600 ohms
Sensitivity (60% modulation @ 1kHz)-	
With Compressor	.. -70dBm
Without Compressor	.. -50dBm

1.2.4.2 Modulation Characteristics

Frequency Response (below limiting)	.. flat or pre-emphasised (optional)
--	--------------------------------------

Line And Microphone Inputs:

Pre-emphasised Response-	
Bandwidth	.. 300Hz to 3kHz (WB & MB)
	.. 300Hz to 2.55kHz (NB)
Below Limiting	.. within +1, -3dB of a 6dB/octave pre-emphasis characteristic
Flat Response	.. within +1, -2dB of output at 1kHz

Above Limiting Response	.. within +1, -2dB of a flat response (ref. 1kHz)
-------------------------	--

Distortion	.. 2% max.
------------	------------

Hum And Noise:

Wide Bandwidth	.. -55dB (300Hz to 3kHz [EIA]) typical
Mid Bandwidth	.. -54dB (CEPT)
Narrow Bandwidth	.. -50dB (CEPT)

Compressor (optional):

Attack Time	.. 10ms
Decay Time	.. 800ms
Range	.. 50dB

1.2.4.3 CTCSS

Standard Tones	.. all 37 EIA group A, B and C tones plus 13 commonly used tones
Frequency Error (from EIA tones)	.. 0.08% max.
Generated Tone Distortion	.. 1.2% max.
Generated Tone Flatness	.. flat across 67 to 250.3Hz to within 1dB
Modulation Level	.. adjustable
Modulated Distortion	.. <5%

1.2.5 Microcontroller

Auxiliary Ports:

Open Drain Type	.. capable of sinking 2.25mA via 2k2Ω
V _{ds} max.	.. 5V

1.2.6 Test Standards

Where applicable, this equipment is tested in accordance with the following standards.

1.2.6.1 European Telecommunication Standard

ETS 300 086 January 1991

Radio equipment and systems; land mobile service; technical characteristics and test conditions for radio equipment with an internal or external RF connector intended primarily for analogue speech.

ETS 300 113 March 1996

Radio equipment and systems; land mobile service; technical characteristics and test conditions for radio equipment intended for the transmission of data (and speech) and having an antenna connector.

ETS 300 219 October 1993

Radio equipment and systems; land mobile service; technical characteristics and test conditions for radio equipment transmitting signals to initiate a specific response in the receiver.

ETS 300 279 February 1996

Radio equipment and systems; electromagnetic compatibility (EMC) standard for private land mobile radio (PMR) and ancillary equipment (speech and/or non-speech).

1.2.6.2 DTI CEPT Recommendation T/R-24-01

Annex I: 1988

Technical characteristics and test conditions for radio equipment in the land mobile service intended primarily for analogue speech.

Annex II: 1988

Technical characteristics of radio equipment in the land mobile service with regard to quality and stability of transmission.

1.2.6.3 Telecommunications Industry Association

ANSI/TIA/EIA-603-1992

Land mobile FM or PM communications equipment measurement and performance standards.

1.3 Product Codes

The three groups of digits in the T850 Series II product code provide information about the model, type and options fitted, according to the conventions described below.

The following explanation of T850 Series II product codes is not intended to suggest that any combination of features is necessarily available in any one product. Consult your nearest Tait Dealer or Customer Service Organisation for more information regarding the availability of specific models, types and options.

Model

The Model group indicates the basic function of the product, as follows:

<u>T85X</u> -XX-XXXX	T855 receiver
	T856 25W transmitter
	T857 exciter
	T858 50W power amplifier
	T859 100W power amplifier

Type

The Type group uses two digits to indicate the basic RF configuration of the product.

The first digit in the Type group designates the frequency range:

T85X- <u>X</u> -XXXX	'1' for 400-440MHz
	'2' for 440-480MHz
	'3' for 480-520MHz

The second digit in the Type group indicates the channel spacing:

T85X-XX- <u>X</u> -XXXX	'0' for wide bandwidth (25kHz)
	'3' for mid bandwidth (20kHz)
	'5' for narrow bandwidth (12.5kHz)
	'6' for United States market only

Options

T85X-XX- <u>XXXX</u>	The Options group uses four digits and/or letters to indicate any options that may be fitted to the product. This includes standard options and special options for specific customers. '0000' indicates a standard Tait product with no options fitted. The large number of options precludes listing them here.
----------------------	---

1.4 T856 Standard Product Range

The following table lists the range of standard T856 types (i.e. no options fitted) available at the time this manual was published. Consult your nearest Tait Dealer or Customer Service Organisation for more information.

Frequency Range (MHz)		400-440			
Deviation (kHz)		2.5	2.5	4	5
TCXO	±1ppm -20°C to +60°C	•	•	•	•
Transmitter Type: T856-		16-0000 ^a	15-0000	13-0000	10-0000

Frequency Range (MHz)		440-480			
Deviation (kHz)		2.5	2.5	4	5
TCXO	±1ppm -20°C to +60°C	•	•	•	•
Transmitter Type: T856-		26-0000 ^a	25-0000	23-0000	20-0000

Frequency Range (MHz)		480-520		
Deviation		2.5	2.5	5
TXCO	±1ppm -20° to +60°C	•	•	•
Transmitter Type: T856-		36-0000 ^a	35-0000	30-0000

a. United States market only.



Caution: T856-1X-XXXX Product Types

The 406 to 406.1MHz frequency range is reserved worldwide for use by Distress Beacons. Do *not* program transmitters to operate in this frequency range.

You can identify the transmitter type by checking the product code printed on a label on the rear of the chassis (Figure 1.1 in Part A shows typical labels). You can further verify the transmitter type by checking the placement of an SMD resistor in the table that is screen printed onto the PCB (refer to Section 6.1 for more details).

1.5 T857 Standard Product Range

The following table lists the range of standard T857 types (i.e. no options fitted and cyclic keying disabled) available at the time this manual was published. Consult your nearest Tait Dealer or Customer Service Organisation for more information.

Frequency Range (MHz)		400-440			
Deviation (kHz)		2.5	2.5	4	5
TCXO	±1ppm -20°C to +60°C	•	•	•	•
Exciter Type: T857-		16-0000 ^a	15-0000	13-0000	10-0000

Frequency Range (MHz)		440-480			
Deviation (kHz)		2.5	2.5	4	5
TCXO	±1ppm -20°C to +60°C	•	•	•	•
Exciter Type: T857-		26-0000 ^a	25-0000	23-0000	20-0000

Frequency Range (MHz)		480-520		
Deviation		2.5	2.5	5
TXCO	±1ppm -20° to +60°C	•	•	•
Exciter Type: T857-		36-0000 ^a	35-0000	30-0000

a. United States market only.



Caution: T857-1X-XXXX Product Types

The 406 to 406.1MHz frequency range is reserved worldwide for use by Distress Beacons. *Do not* program exciters to operate in this frequency range.

You can identify the exciter type by checking the product code printed on a label on the rear of the chassis ([Figure 1.1](#) in Part A shows typical labels). You can further verify the exciter type by checking the placement of an SMD resistor in the table that is screen printed onto the PCB (refer to Section 6.1 for more details).

The photograph in [Figure 1.1](#) on the next page will help you to identify the main circuit blocks in the T856.

There is a similar photograph in [Figure 4.4](#) which shows the main tuning and adjustment controls.

Extending both these fold-outs will allow you to refer to both photographs while using the manual.

The photograph in [Figure 1.2](#) on the next page shows the T856 front panel controls.

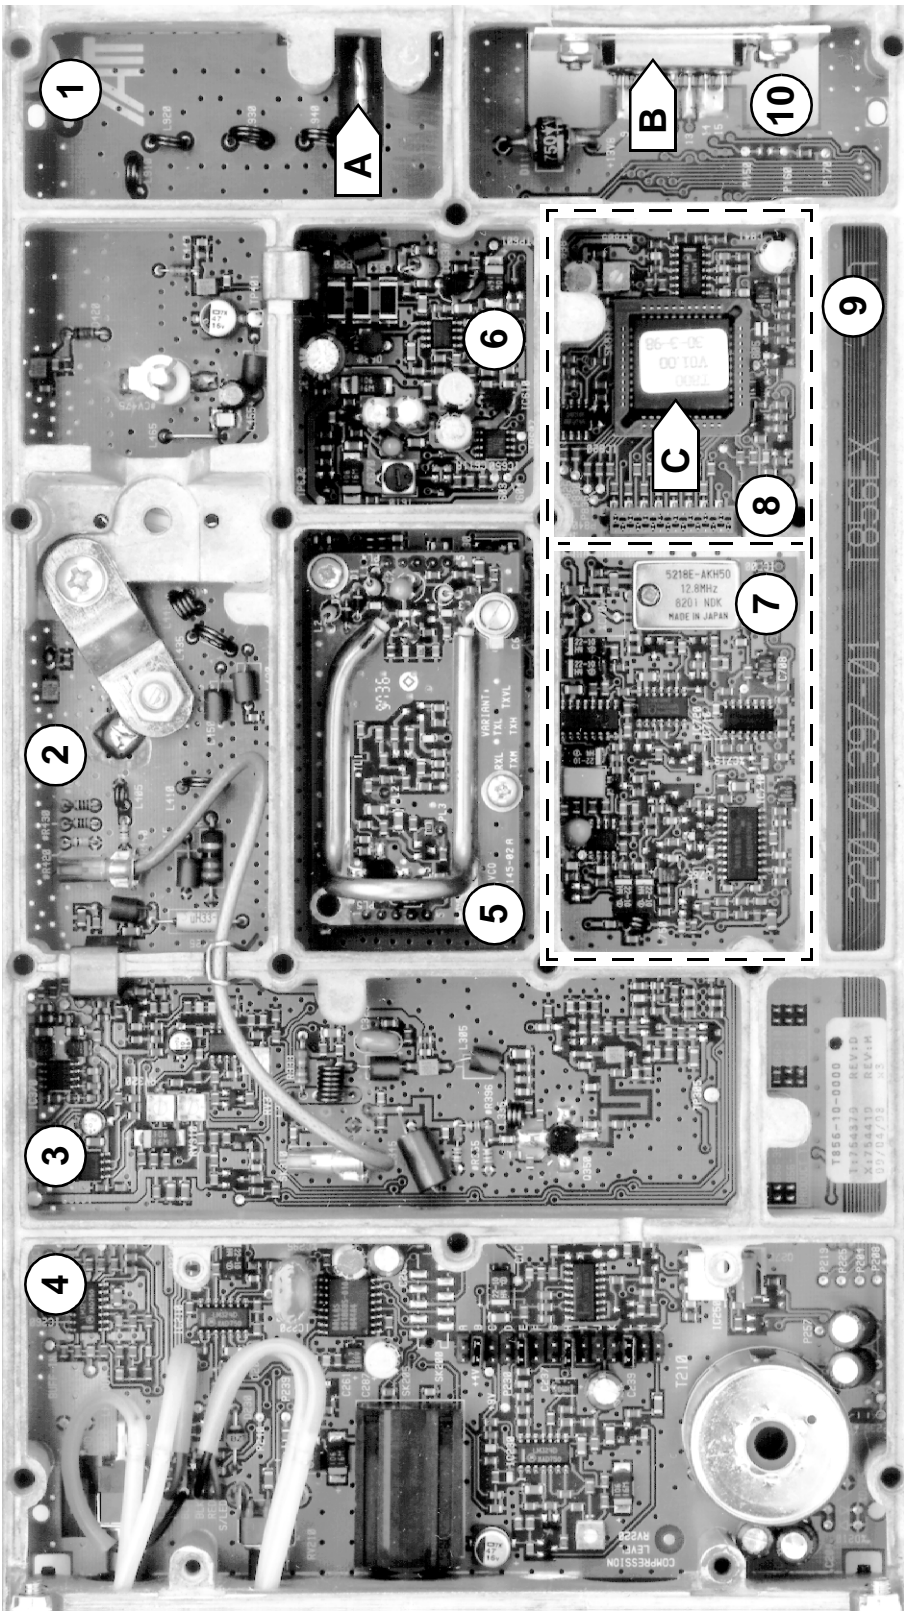


Figure 1.1 T856 Main Circuit Block Identification

- Key:**

 - 1 low pass filter
 - 2 PA
 - 3 exciter drive amplifier
 - 4 audio processor
 - 5 VCO
 - 6 regulators
 - 7 synthesiser
 - 8 microcontroller and CTCSS
 - 9 duct for cabling to extra D-range (if fitted)
 - 10 D-range
- A RF output
 - B D-range connector ("D-range 1" incl. audio in & DC in (refer to [Section 2.2](#) in Part F)
 - C microcontroller

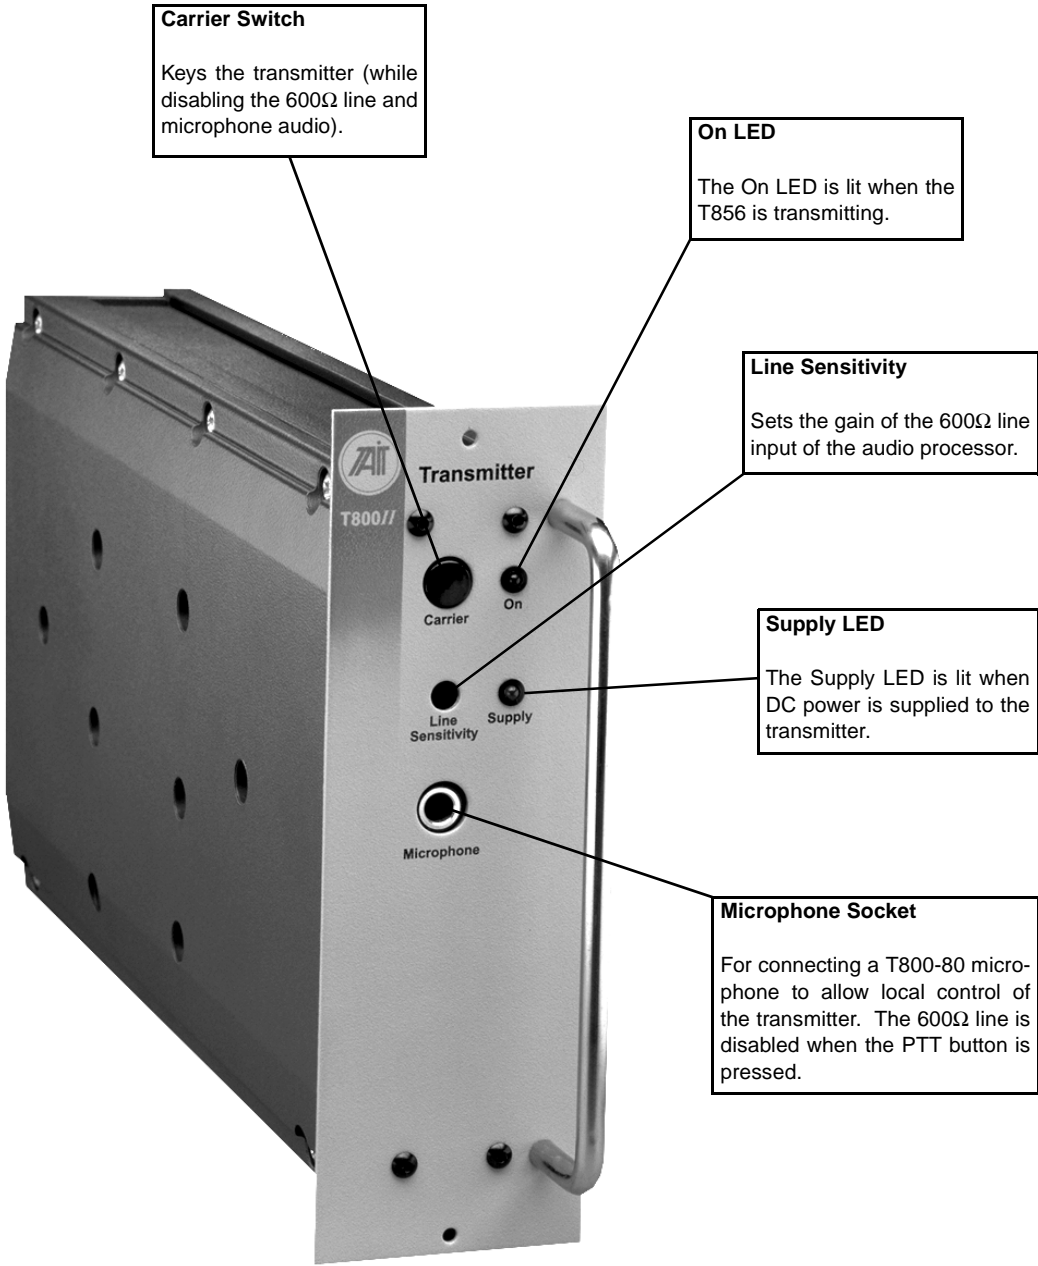


Figure 1.2 T856 Front Panel Controls

The photograph in [Figure 1.3](#) on the next page will help you to identify the main circuit blocks in the T857.

There is a similar photograph in [Figure 4.5](#) which shows the main tuning and adjustment controls.

Extending both these fold-outs will allow you to refer to both photographs while using the manual.

The photograph in [Figure 1.4](#) on the next page shows the T857 front panel controls.

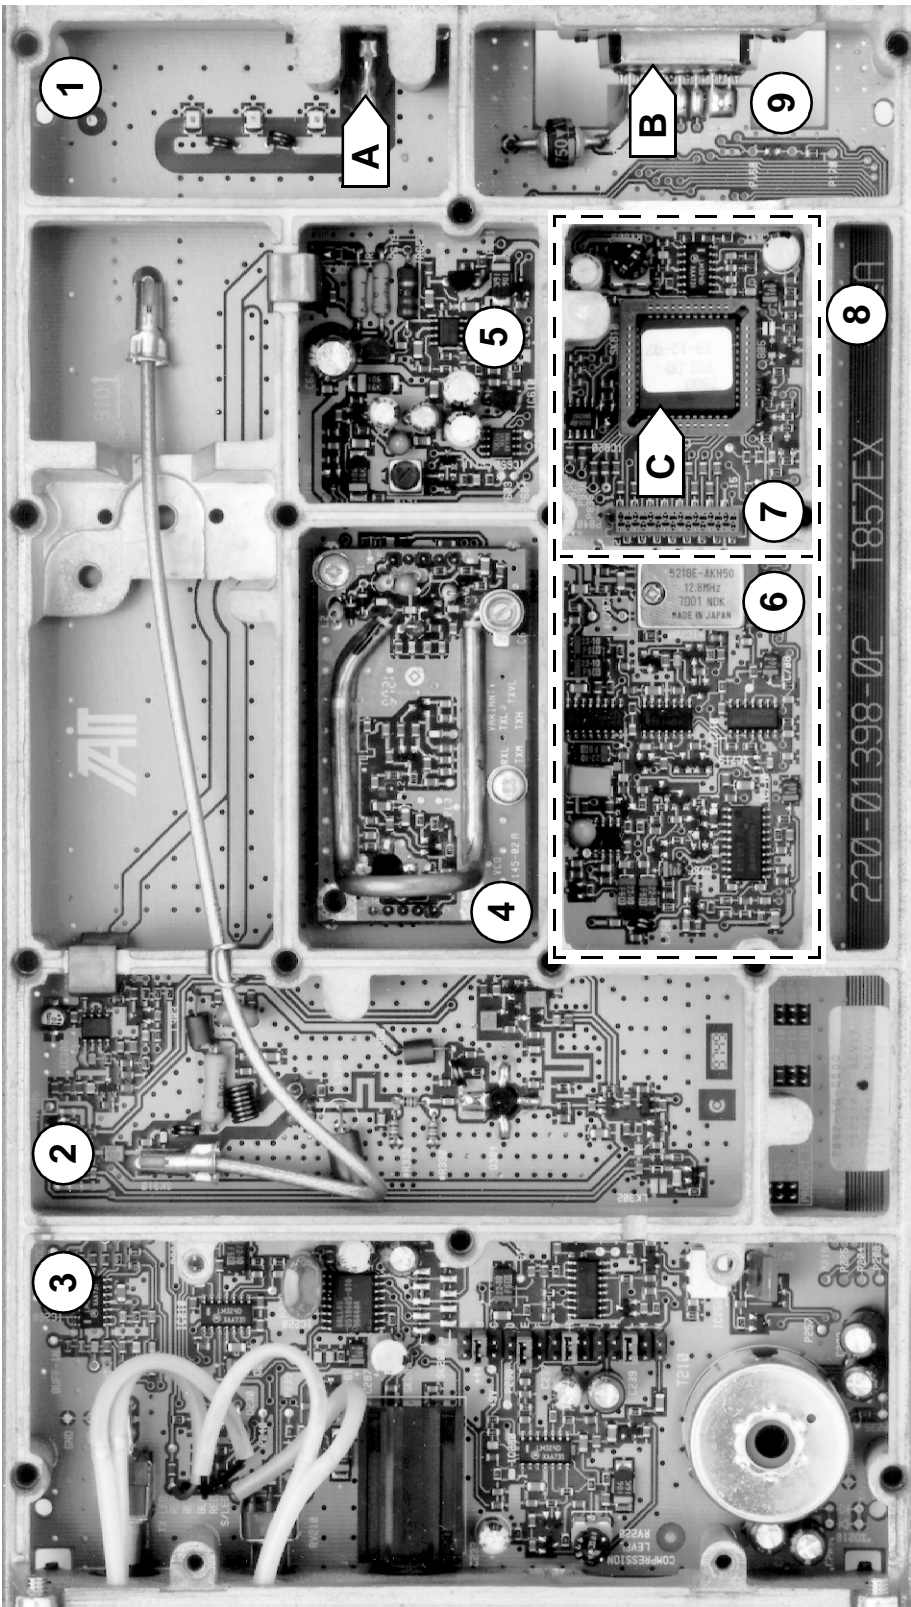


Figure 1.3 T857 Main Circuit Block Identification

- Key:**

 - 1 low pass filter
 - 2 exciter drive amplifier
 - 3 audio processor
 - 4 VCO
 - 5 regulators
 - 6 synthesiser
 - 7 microcontroller and CTCSS
- 8 duct for cabling to extra D-range (if fitted)
 - 9 D-range
 - A RF output
 - B D-range connector ("D-range 1") incl. audio in & DC in (refer to [Section 2.2](#) in Part F)
 - C microcontroller

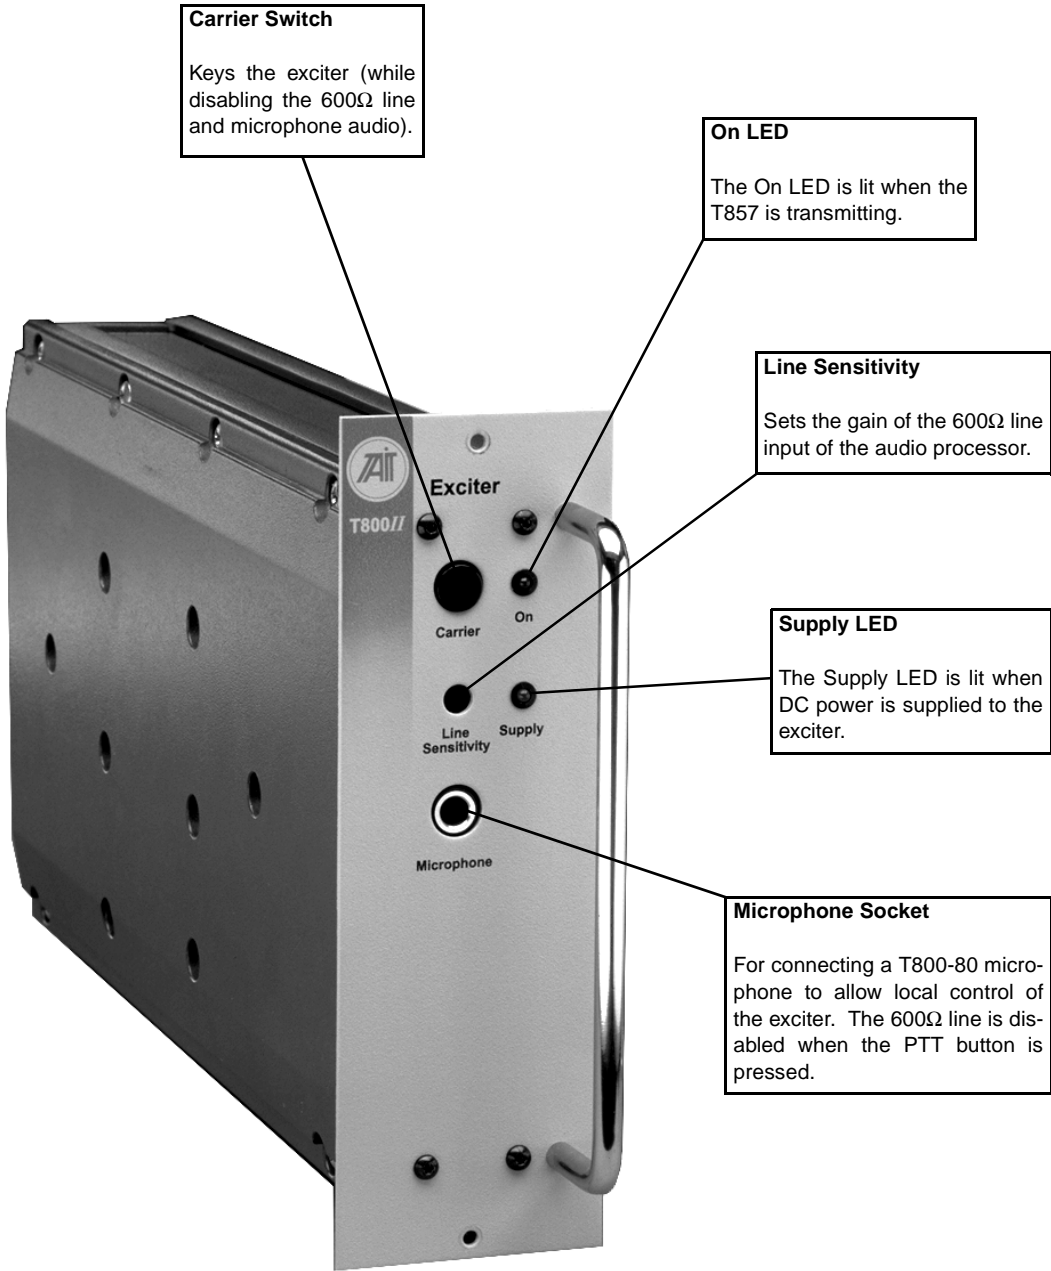


Figure 1.4 T857 Front Panel Controls

2 T856/857 Circuit Operation

This section provides a basic description of the circuit operation of the T856 transmitter and T857 exciter.

Note: Unless otherwise specified, the term "PGM800Win" used in this and following sections refers to version 2.00 and later of the software.

Refer to Section 6 where the parts lists, grid reference index and diagrams will provide detailed information on identifying and locating components and test points on the main PCB. The parts list and diagrams for the VCO PCB are in Part E.

The following topics are covered in this section.

Section	Title	Page
2.1	Introduction	2.3
2.2	Microcontroller	2.4
2.3	Synthesised Local Oscillator	2.5
2.3.1	Two Point Modulation	2.6
2.4	VCO	2.7
2.4.1	VCO Supply	2.7
2.5	Audio Processor	2.8
2.5.1	General	2.8
2.5.2	Audio Inputs	2.8
2.5.3	Keying Inputs	2.9
2.5.4	Compressor (Automatic Level Control (ALC))	2.9
2.5.5	Outputs To Modulators	2.9
2.6	Power Supply & Regulator Circuits	2.10
2.7	Transmit Timers	2.11
2.8	T856 Drive Amplifier & PA	2.12
2.9	T857 Exciter Drive Amplifier	2.13

Figure	Title	Page
2.1	T856 High Level Block Diagram	2.3
2.2	T857 High Level Block Diagram	2.3
2.3	T856/857 Microcontroller Block Diagram	2.4
2.4	T856/857 Synthesiser Block Diagram	2.5
2.5	T856/857 Two Point Modulation	2.6
2.6	T856/857 Audio Processor Block Diagram	2.8
2.7	T856/857 Power Supply & Regulators Block Diagram	2.10
2.8	T856/857 Transmit Timers	2.11

2.1 Introduction

The individual circuit blocks which make up the T856 and T857 are:

- synthesiser
- VCO
- audio processor
- drive amplifier
- power amplifier (T856 only)
- voltage regulators.

Each of these circuit blocks is set in its own shielded compartment, formed as an integral part of the main chassis.

The configuration of the circuit blocks may be seen on a functional level in [Figure 2.1](#) and [Figure 2.2](#). Refer to the circuit diagrams in Section 6.2 (T856) or 6.3 (T857) for more detail.

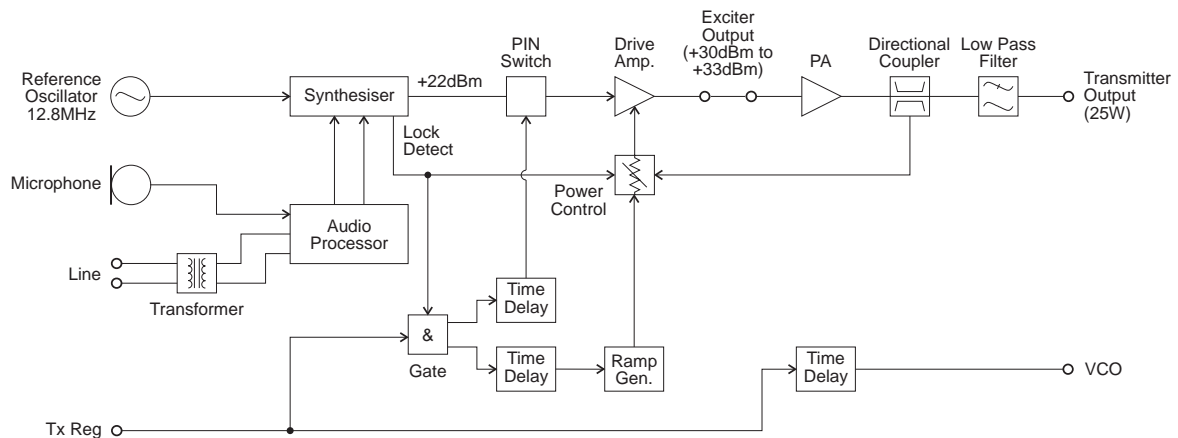


Figure 2.1 T856 High Level Block Diagram

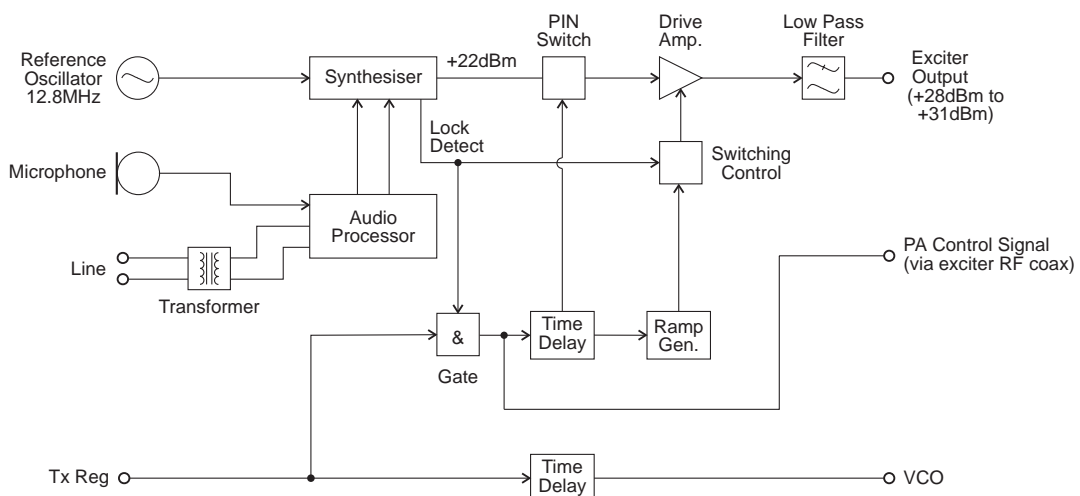


Figure 2.2 T857 High Level Block Diagram

2.2 Microcontroller

(Refer to the microcontroller circuit diagram (sheet 8) in Section 6.2 or 6.3.)

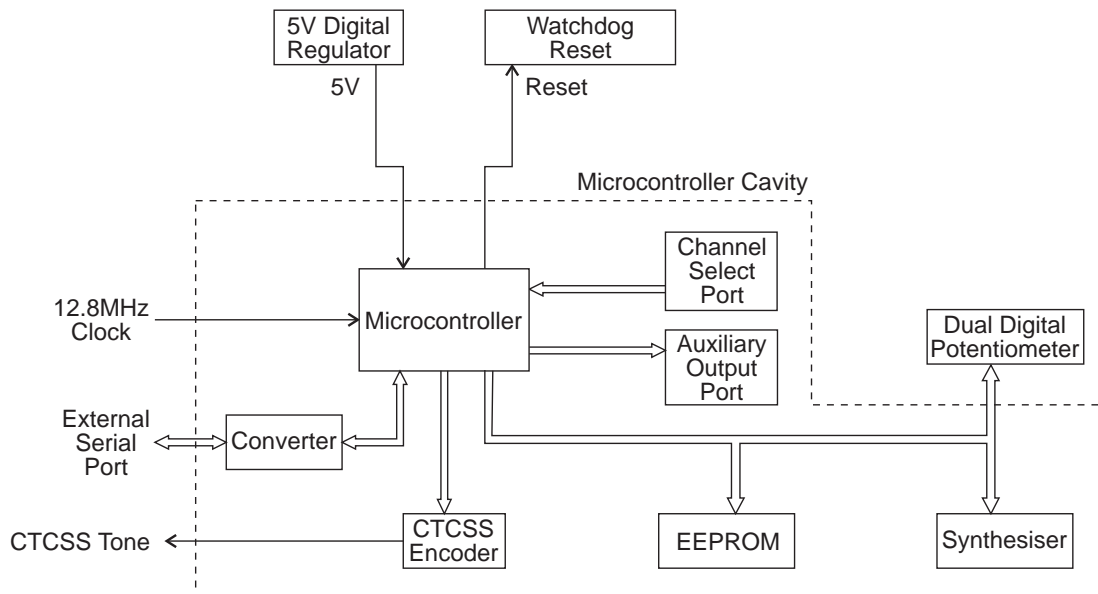


Figure 2.3 T856/857 Microcontroller Block Diagram

Overall system control of the T856/857 is accomplished by the use of a member of the 80C51 family of microcontrollers (IC810). It runs from internal ROM and RAM, thus leaving all four ports free for input/output functions.

Non-volatile data storage is achieved by serial communication with a 16kBit EEPROM (IC820). This serial bus is also used by the microcontroller to program the synthesiser (IC740) and deviation control EPOTS (IC220).

The main tasks of the microcontroller are as follows:

- program the synthesiser and EPOT;
- interface with the PGM800Win programming software at 9600 baud via the serial communication lines on D-range 1 (PL100) & D-range 2;
- monitor channel change inputs from D-range 2;
- generate timing waveforms for CTCSS encoding;
- coordinate and implement timing control of the exciter/transmitter.
- control the front panel "Supply" LED (refer to [Section 5.3](#)).

2.3 Synthesised Local Oscillator

(Refer to the synthesiser circuit diagram (sheet 7) in Section 6.2 or 6.3 and the VCO circuit diagram in Part E.)

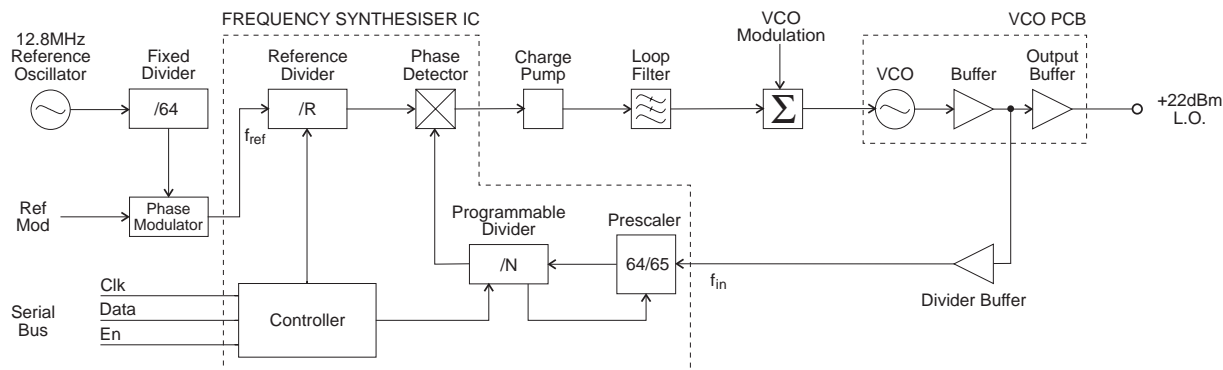


Figure 2.4 T856/857 Synthesiser Block Diagram

The synthesiser (IC740) employs a phase-locked loop (PLL) to lock a voltage controlled oscillator (VCO) to a given reference frequency. The synthesiser receives the divider information from the control microprocessor via a 3 wire serial bus (clock, data, enable). When the data has been latched in, the synthesiser processes the incoming signals from the VCO buffer (f_{in}) and the phase modulator (f_{ref}).

A reference oscillator at 12.8MHz (=IC700) is buffered (IC710 pins 3 & 4) and divided down to 200kHz (IC730). This 200kHz square wave is then summed with the modulating audio and passed to an integrator (IC720 pins 9 & 8, Q710, Q720). This produces a ramping waveform which is centred around a DC level determined by the incoming audio. IC720 pins 5 & 6 perform as a comparator, ultimately producing a phase-modulated 200kHz square wave. This is followed by another phase shifting stage (IC720 pins 3 & 4, Q730, Q740), before being divided down to 6.25kHz or 5kHz within the synthesiser IC (IC740).

A buffered output of the VCO (Q795) is divided with a prescaler and programmable divider which is incorporated into the synthesiser chip (IC740). This signal is compared with the phase modulated reference signal at the phase detector (also part of the synthesiser chip). The phase detector outputs drive a balanced charge pump circuit (Q760, Q770, Q775, Q780, Q785) and active loop filter (IC750 pins 5, 6 & 7, Q790) which produces a DC voltage between 0V and 20V to tune the VCO. This VCO control line is further filtered to attenuate noise and other spurious signals. Note that the VCO frequency increases with increasing control voltage.

If the synthesiser loop loses lock, a pulsed signal appears at LD (pin 2) of IC740. This signal is filtered and buffered by IC750 pins 1, 2 & 3, producing the Lock-Detect signal used to shut off the power supply to the drive amplifier. IC750 pin 1 is at 20V when the synthesiser is out of lock.

2.3.1 Two Point Modulation

Frequency modulation occurs by modulating both the VCO input and the synthesiser reference input. This process is called two point modulation and ensures a flat modulation response from 67Hz to 3kHz (2.55kHz for narrow bandwidth).

The PLL has a fast response time, allowing a Tx key-up time of <30ms. Because of this fast response time the PLL sees lower modulation frequencies superimposed on the VCO as an error and corrects for it, resulting in no modulation on the carrier. At modulation frequencies greater than 300Hz the loop cannot correct fast enough and modulation is seen on the carrier. The response of the loop to VCO modulation is shown by f_2 in Figure 2.5 below.

To achieve low frequency modulation, the reference oscillator is also modulated so that the phase detector of IC740 detects no frequency error under modulation. Thus, the synthesiser loop will not attempt to correct for modulation and the audio frequency response of the transmitter remains unaffected. The response of the loop to reference frequency modulation is shown by f_1 in Figure 2.5.

The reference modulation is controlled by a 256-step 10k electronic potentiometer (EPOT) which is adjustable via PGM800Win. The EPOT is made up of 256 resistive sections (representing approximately 39Ω each) which can be individually addressed by the microcontroller. Each section can be switched in or out of circuit to achieve the required total resistance, thus giving control of the reference modulation.

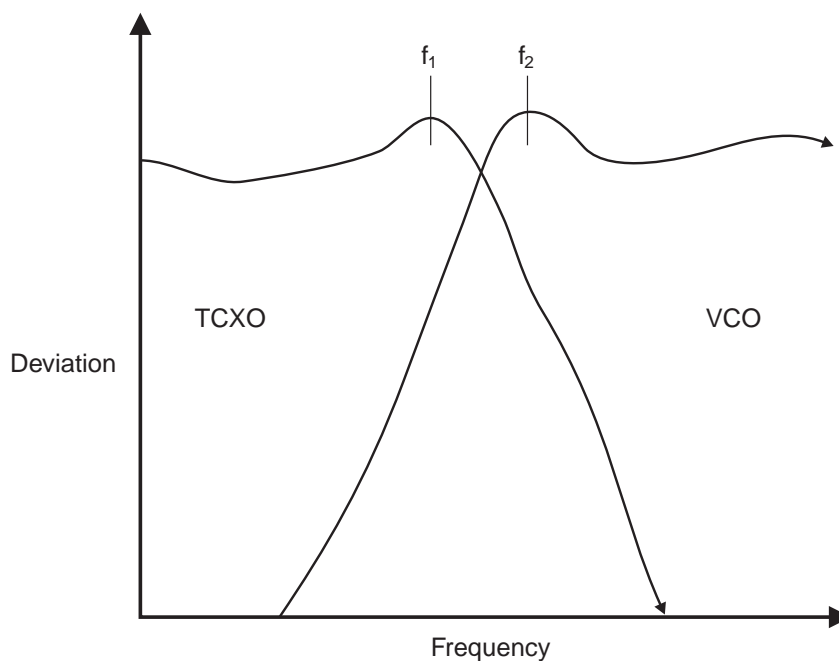


Figure 2.5 T856/857 Two Point Modulation

2.4 VCO

(Refer to the VCO circuit diagram in Part E.)

The VCO transistor (Q1) operates in a common emitter configuration, with an LC tank circuit coupled between its gate and drain to provide the feedback necessary for oscillation. The VCO control voltage from the loop filter (IC750) is applied to the varicaps (D1-D2) to facilitate tuning within an 8MHz band of frequencies. A trimcap (C6) is used for coarse tuning of the VCO. The output from the oscillator circuit drives a cascode amplifier stage (Q2, Q3) which supplies +10dBm (typically) to a further stage of amplification, Q5. This is the final amplifier on the VCO PCB, and delivers +20dBm (typically) to the exciter drive amplifier.

A low level "sniff" is taken from the input to Q5 and used to drive the divider buffer for the synthesiser (IC740).

The VCO operates at the actual output frequency of the exciter, i.e. there are no multiplier stages. It is modulated by superimposing the audio signal onto the control voltage and by phase modulating the reference signal.

2.4.1 VCO Supply

The VCO is supplied from two switched +9V supplies under the control of the Tx-Reg. supply.

The VCO and buffer amplifier are supplied from one +9V switched supply by Q540 via the C multiplier (Q550, C530 on the T856 and C550 on the T857).

The output amplifier is supplied from the other +9V supply by Q520, Q530, and Q510.

A delay circuit holds the VCO on for a short time after the Tx-Reg. supply has been switched off. This is to allow the RF power circuits (both exciter and PA) to ramp down in the correct manner before the VCO is switched off.

2.5 Audio Processor

(Refer to the audio processor circuit diagram (sheet 2) in Section 6.2 or 6.3.)

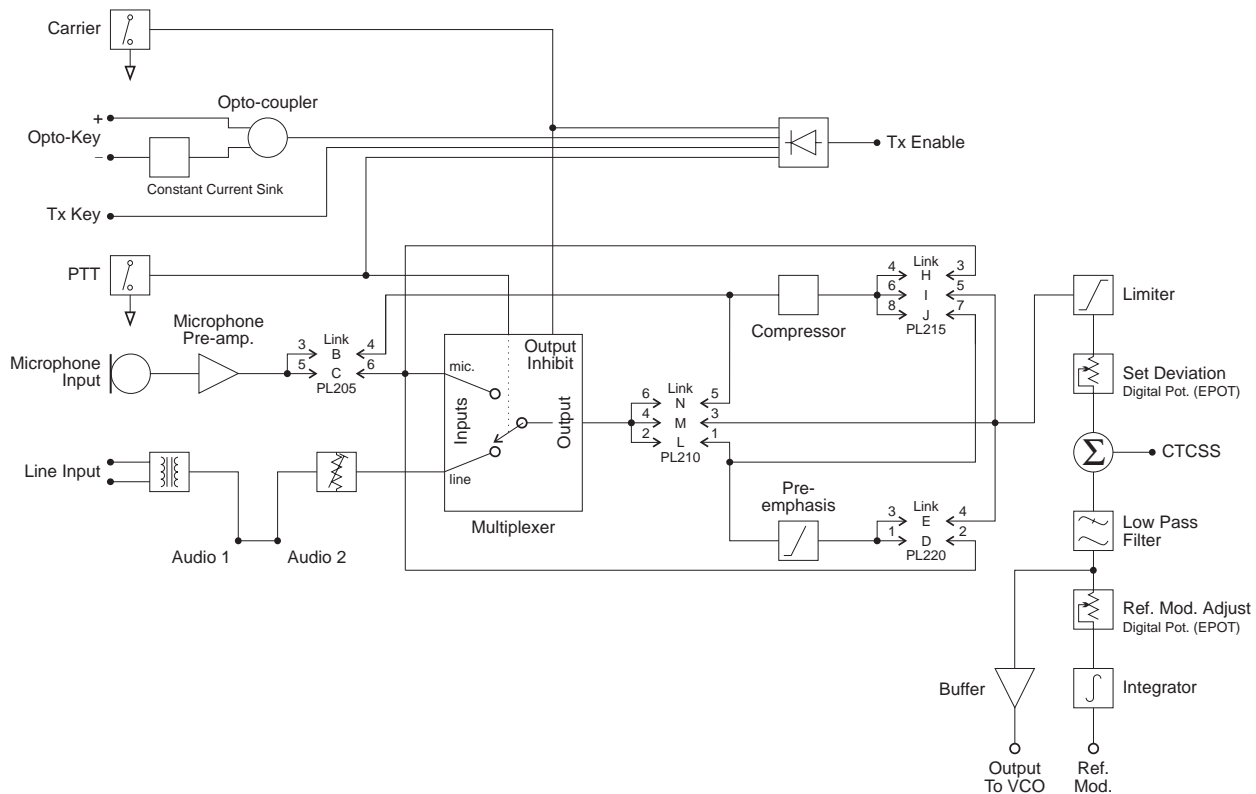


Figure 2.6 T856/857 Audio Processor Block Diagram

2.5.1 General

The audio processor comprises several link selectable circuit blocks which may be configured in a variety of combinations to suit individual requirements. The pre-emphasis network and compressor may be linked individually or cascaded between either or both audio inputs and the limiter.

Refer to [Section 3.5.1](#) for linking details.

2.5.2 Audio Inputs

Two audio inputs are available: one from a 600 ohm balanced (or unbalanced) line, and the other from a local microphone. The microphone signal is passed first to a pre-amplifier (Q210) and ultimately to a multiplexer (IC240), but in between may pass through the compressor (depending on the linking details). The line transformer is also connected to the multiplexer and is disabled by the microphone PTT switch.

A third input for external CTCSS tones is also provided.

2.5.3 Keying Inputs

There are four ways to key the exciter:

- pulling the Tx-Key line low (pin 13 on D-range 1 [PL100]) at the rear of the set);
- pushing the "Carrier" button on the front panel - this will inhibit all audio;
- using the PTT button on the local microphone, disabling audio from the line;
- via the opto-key inputs (pins 11 and 12 on D-range 1 [PL100]) when electrical isolation is required. This features a constant current sink (Q270) to ensure reliable activation of the opto-coupler (IC250) at low keying voltages.

2.5.4 Compressor (Automatic Level Control (ALC))

The input signal is fed via a current controlled attenuator (Q230, Q220) to a high gain stage (IC230) from which the output signal is taken. This signal is passed to a comparator (IC230) which toggles whenever the audio signal exceeds a DC threshold determined by RV220. Thus, the comparator produces a square wave whose mark-space ratio is determined by the amplitude of the audio signal. This square wave pumps up the reservoir capacitor (C233) which controls the attenuator (Q230, Q220), thus completing the feedback loop.

The compression level is set by adjustment of the comparator threshold (RV220).

Note: Although the high dynamic range of the compressor allows the use of very low audio signal levels, such conditions will be accompanied by a degradation of the signal-to-noise ratio. Very low audio input levels should therefore be avoided where possible.

2.5.5 Outputs To Modulators

The output signal from the limiter (IC210, IC230) is summed with a CTCSS tone at a summing amplifier (IC260). The signal is then low pass filtered (IC260) and split to supply the two modulators.

Since the VCO modulator is a true frequency modulator, its audio is simply buffered (IC260). The reference modulator, however, is a phase modulator and its audio must first be integrated (IC210).

It is vital that the audio levels to the modulators are accurately set, *relative to each other*. Hence the inclusion of level adjustment in the reference modulator path. Once set, adjustments to absolute deviation may be made only by IC220, a 256-step 10k electronic potentiometer (EPOT), which is controlled via PGM800Win. The EPOT is made up of 256 resistive sections (representing approximately 39Ω each) which can be individually addressed by the microcontroller. Each section can be switched in or out of circuit to achieve the required total resistance, thus adjusting the absolute deviation level.

2.6 Power Supply & Regulator Circuits

(Refer to the regulators circuit diagram (sheet 6) in Section 6.2 or 6.3.)

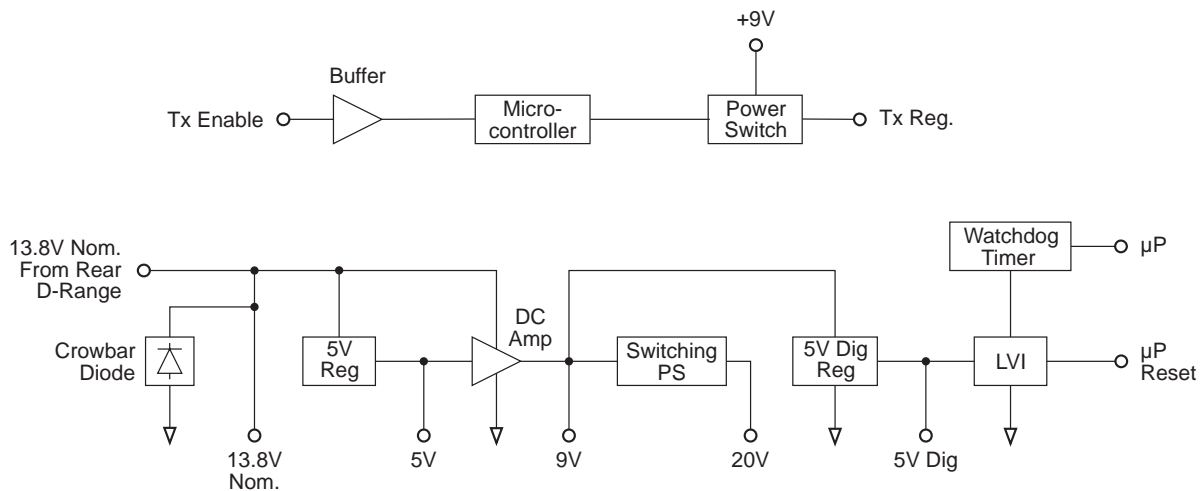


Figure 2.7 T856/857 Power Supply & Regulators Block Diagram

The T856 and T857 are designed to operate from a 10.8-16V DC supply (13.8V nominal). A 5.3V regulator (IC630) runs directly from the 13.8V rail, driving much of the synthesiser circuitry. It is also used as the reference for a DC amplifier (IC640, Q630, Q620) which provides a medium current capability 9V supply. The T856 has a regulator (IC370) which produces 9V for use in the exciter and audio circuits.

A switching power supply (Q660, Q670) runs from the 9V supply and provides a low current capability +20V supply. This is used to drive the synthesiser loop filter (IC750), giving a VCO control voltage range of up to 20V.

Ultimate control of the transmitter is via the Tx-Reg. supply, switched from 9V by Q610. This is enabled via the Tx-Enable signal from the audio processor, and microprocessor.

A crowbar diode is fitted for protection against connection to a power supply of incorrect polarity. It also provides transient overvoltage protection.

Note: A fuse must be fitted in the power supply line for the diode to provide effective protection.

2.7 Transmit Timers

The transmit tail timer, transmit timeout timer and transmit lockout timer can all be set from PGM800Win. The fields for setting these are found on the system information page. These three timers operate as follows (refer also to [Figure 2.8](#)):

Timer	Function	Adjustment
Transmit Tail	Sets the tail time during which the transmitter stays keyed after the external key source has been removed.	0-5 seconds in 100ms steps ^a
Transmit Timeout	Sets the maximum continuous transmission time. Once the timer has timed out, the transmitter must be keyed again, unless prevented by the transmit lockout timer.	0-300 seconds ^b in 10 second steps
Transmit Lockout	Sets the period of time that must elapse after a timeout before the transmitter can re-transmit. Once the timer has timed out, the transmitter can be keyed again.	0-60 seconds in 10 second steps

a. Adjustable in 20ms steps in PGM800Win version 2.12 and later.

b. Adjustable from 0 to 600 seconds in PGM800Win version 2.12 and later.

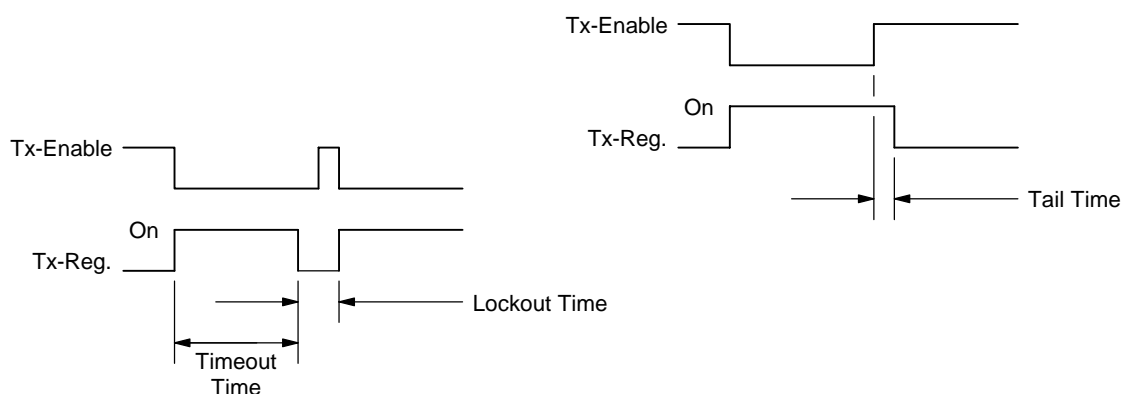


Figure 2.8 T856/857 Transmit Timers

2.8 T856 Drive Amplifier & PA

(Refer to [Figure 2.1](#) and the exciter and PA circuit diagrams (sheets 3 & 4) in Section 6.2.)

The output power of the PA is maintained at a constant level via a power control loop applied to the two-stage, wide band exciter amplifier (Q350, Q355). The forward and reverse RF power levels are sensed via a dual directional coupler and detector diodes (D440, D420 in the PA cavity). The detected DC signals are buffered (IC330 pins 3 & 5) and then summed with the 'power control' level and fed to the control integrator (IC350 pin 6). The output control voltage is buffered by Q310 and Q315, and applied to the collector of the wide band exciter amplifier.

Note: Forward and reflected power signals are summed so that, under high VSWR, the power control will turn the output RF level down.

To reduce the spurious output level when the synthesiser is out-of-lock, the Tx-Reg. and Lock-Detect signals are gated to inhibit the PA control circuit and to switch off the RF signal at the input to the drive amplifier. This is achieved by a PIN switch attenuator (D340, D380, D360).

Cyclic keying control is provided by additional circuitry consisting of several time delay, ramp and gate stages:

- Q325, IC350 power ramping
- Q355, Q325 Tx-Reg. and $\overline{\text{Lock-Detect}}$ gate
- Q335, Q340, Q345 delay and PIN switch drive.

This is to allow the RF power circuits (both exciter and PA) to ramp up and down in a controlled manner so that minimal adjacent channel interference is generated during the transition.

The output of the wide band amplifier is approximately 1W (+30dBm) for an input of 100mW (+20dBm) from the VCO, when the power control is set to maximum.

A temperature sensor (R481) is provided so that the RF output power can be reduced to a preset level when a set temperature is exceeded. This is a protection circuit (IC350 pin 1, Q320) to prevent overheating, as the unit is *not* rated for continuous operation (refer to [Section 1.2.3](#) for duty cycle specifications).

#R517, #R518 and #R519 form an attenuator to provide good VCO/exciter isolation as well as the correct exciter drive level.

The attenuator (#R395, #R396 and #R397) aids in producing the correct exciter drive level to the PA over the three frequency ranges.

The RF output from the exciter is fed to the driver stage (Q410) and then to the final (Q420). DC is fed to the final via a low pass filter with special low frequency decoupling. CV475 tunes the output matching across the entire band.

2.9 T857 Exciter Drive Amplifier

(Refer to [Figure 2.2](#) and the exciter circuit diagram (sheet 3) in Section 6.3.)

A two-stage, wide band amplifier (Q304, Q305) provides an output level of approximately 1W (+30dBm) for an input of 100mW (+20dBm) from the VCO. IC300 pin 1, Q302, and Q303 provide a 9V regulated supply for the exciter.

To reduce the spurious output level when the synthesiser is out-of-lock, the Tx-Reg. and Lock-Detect signals are gated to inhibit the exciter control circuit and to switch off the RF signal at the input to the drive amplifier. This is achieved by a PIN switch attenuator (D201, D202, D203).

Cyclic keying control is provided by additional circuitry consisting of several time delay, ramp and gate stages:

- Q301, Q302, Q303, IC300 power ramping
- Q310, Q311 Tx-Reg. and $\overline{\text{Lock-Detect}}$ gate
- Q306, Q307, Q308, Q309 delay and PIN switch drive.

This is to allow the RF power circuits (both exciter and PA) to ramp up and down in a controlled manner so that minimal adjacent channel interference is generated during the transition.

R517, R518 and R519 form a 3dB attenuator to provide good VCO/drive amplifier isolation as well as the correct exciter drive level

Note: The exciter provides a DC control signal to the PA via the RF coax. This is injected via L314.

3 T856/857 Initial Tuning & Adjustment



Caution: This equipment contains CMOS devices which are susceptible to damage from static charges. Refer to [Section 1.2](#) in Part A for more information on anti-static procedures when handling these devices.

The following section describes both short and full tuning and adjustment procedures and provides information on:

- channel programming
- selecting required audio links
- synthesiser alignment
- PA alignment (T856 only)
- modulator adjustment
- limiter adjustment
- setting line level
- compressor adjustment
- timer adjustment.

Note: Unless otherwise specified, the term "PGM800Win" used in this and following sections refers to version 2.00 and later of the software.

Refer to [Figure 4.4](#) and [Figure 4.5](#) which show the location of the main tuning and adjustment controls. Refer also to Section 6 where the parts lists, grid reference index and diagrams will provide detailed information on identifying and locating components and test points on the main PCB. The parts list and diagrams for the VCO PCB are in Part E.

Section	Title	Page
3.1	Introduction	3.3
3.2	Channel Programming	3.3
3.3	Test Equipment Required	3.4
3.4	Short Tuning Procedure	3.5
3.4.1	Introduction	3.5
3.4.2	Synthesiser Alignment	3.5
3.4.3	Output Power Adjustment (T856 Only)	3.5
3.4.4	Two Point Modulation Adjustment	3.6
3.4.5	CTCSS Encoder (If Used)	3.7
3.4.6	FM Deviation (Limiter) Adjustment	3.7
3.4.7	Line-in Level Adjustment	3.7

Section	Title	Page
3.5	Audio Processor Links	3.8
3.5.1	Link Details	3.8
3.5.2	Typical Options	3.8
3.6	Synthesiser Alignment	3.9
3.7	PA Alignment (T856 Only)	3.10
3.8	Thermal Shutdown (T856 Only)	3.10
3.9	Audio Processor & CTCSS	3.11
3.9.1	Two Point Modulation	3.11
3.9.2	Modulator Adjustment	3.11
3.9.3	CTCSS Encoder (If Used)	3.12
3.9.4	Limiter Adjustment	3.12
3.9.5	Line Level Without Compressor	3.13
3.9.6	Compressor	3.13
3.9.6.1	Compressor On Line Input Only	3.13
3.9.6.2	Compressor On Microphone Input Only	3.13
3.9.6.3	Compressor On Both Line & Microphone Inputs	3.14

Figure	Title	Page
3.1	T856/857 Test Equipment Set-up With T800-01-0010	3.4
3.2	T856/857 Test Equipment Set-up Without T800-01-0010	3.4

3.1 Introduction

When you receive your T856 transmitter or T857 exciter it will be run up and working on a particular frequency (the "default channel")¹. If you want to switch to a frequency that is within the 8MHz switching range (i.e. ± 4 MHz from the factory programmed frequency), you should only need to reprogram the transmitter/exciter with the PGM800Win software (refer to the PGM800Win programming kit and [Section 3.2](#) below).

However, if you want to switch to a frequency outside the 8MHz switching range, you will have to reprogram and re-tune the transmitter/exciter to ensure correct operation. In this case you should carry out the short tuning procedure described in [Section 3.4](#).

If you have carried out repairs or other major adjustments, you must carry out the full tuning and adjustment procedure described in this section (except for [Section 3.4](#)).

3.2 Channel Programming

You can program up to 128 channel frequencies into the transmitter/exciter's EEPROM memory (IC820) by using the PGM800Win software package and an IBMTM PC. You can also use PGM800Win to select the transmitter/exciter's current operating frequency (or "default channel").

If the transmitter/exciter is installed in a rack frame, you can program it via the programming port in the speaker panel. However, you can also program the transmitter/exciter before it is installed in a rack frame as follows:

- by using a T800-01-0010 calibration test unit;
- via D-range 1;
- via D-range 2 (standard T800-03-0000 auxiliary D-range only);
- via SK805 (internal Micromatch connector).

If you do not use the T800-01-0010, you will have to connect the PC to the transmitter/exciter via a module programming interface (such as the T800-01-0004).

For a full description of the channel programming procedure, refer to the PGM800Win programming software user's manual.

Note: When an auxiliary D-range kit (D-range 2 - T800-03-0000) is fitted, you can also select a channel with an external switch, such as the DIP switch on the rack frame backplane PCB. Refer to Part C in the T800 Series Ancillary Equipment Service Manual (M800-00-101 or later issue) or consult your nearest Tait Dealer or Customer Service Organisation for further details.

1. Use the "Read Module" function in PGM800Win to find out what the default channel is.

3.3 Test Equipment Required

You will need the following test equipment:

- computer with PGM800Win installed
 - T800 programming kit
 - module programming interface (e.g. T800-01-0004 - optional)
 - 13.8V power supply
 - digital multimeter
 - audio signal generator
 - RF power meter
 - audio voltmeter x 2
 - modulation meter
 - oscilloscope (digital preferred)
 - 20dB or 40dB pad
 - T800-01-0010 calibration test unit (optional)
- } or RF test set (optional)

Figure 3.1 and Figure 3.2 show typical test equipment set-ups.

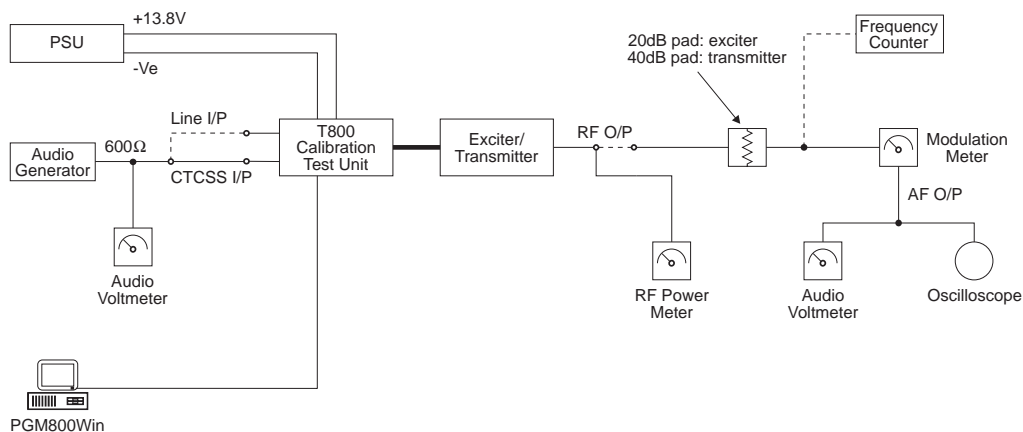


Figure 3.1 T856/857 Test Equipment Set-up With T800-01-0010

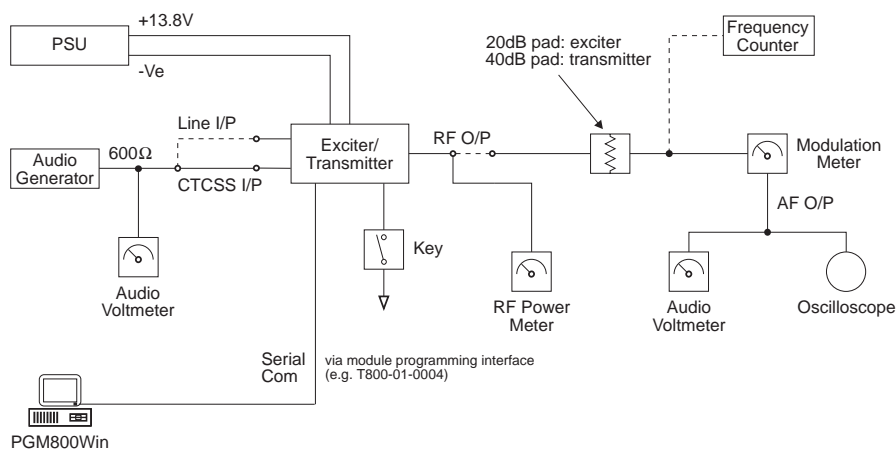


Figure 3.2 T856/857 Test Equipment Set-up Without T800-01-0010

3.4 Short Tuning Procedure

Use this procedure only if you want to reprogram the T856/857 to a frequency outside the 8MHz switching range and do not intend to carry out any other major adjustments or repairs.

3.4.1 Introduction

Reprogram the operating frequency as described in the PGM800Win programming kit (refer to [Section 3.2](#)).

Remove the top cover (nearest the handle).

Set up the test equipment as described in [Section 3.3](#).

Set the links in the audio processor section as required (refer to [Section 3.5](#)).

3.4.2 Synthesiser Alignment

- Connect a high impedance voltmeter to the long lead of L1 in the VCO (this measures the synthesiser loop voltage).
- Key the transmitter by earthing the Tx-Key line.
- **Single Channel** Tune VCO trimmer C6 for a synthesiser loop voltage of 10V.
- **Multichannel** Tune VCO trimmer C6 for a synthesiser loop voltage of 10V on the middle channel.
 If there is no middle channel, tune C6 so that the channels are symmetrically placed around a loop voltage of 10V.
 All channels should lie within the upper and lower limits of 16V and 3V respectively.
 Do not attempt to program channels with a greater frequency separation than the specified switching range of 8MHz.

3.4.3 Output Power Adjustment (T856 Only)

Connect an RF power meter with suitable attenuation to the output socket and key the transmitter. |

Turn RV310 (power control) fully clockwise.

Tune #CV475 (output power trim) for maximum output power and check that this is >30W.

Adjust RV310 for the required output power (between 5 and 25W).

Readjust #CV475 to reduce the supply current by up to 0.5A.

3.4.4 Two Point Modulation Adjustment

Note 1: In this and following sections deviation settings are given first for wide bandwidth sets, followed by settings in brackets for mid bandwidth sets () and narrow bandwidth sets [].

Note 2: The reference modulation and limiter adjustments are controlled by 256-step electronic potentiometers (EPOTs), which are adjusted via the “Reference Modulation” and “Deviation” settings in PGM800Win. This allows the two point modulation and deviation settings to be adjusted for each channel.

Note 3: To optimise the modulation response across the switching range, repeat steps 1-4 below for each channel that will be used (usually needed only for data applications). In applications where the modulation response is less critical (e.g. voice use only), carry out steps 1-4 below on the middle channel and use the “EPOT Fill” option¹ in PGM800Win to copy the value to the other channels.

Note 4: If you are using an RF test set, turn the low pass filter off and set the high pass filter to 15kHz *before* beginning this procedure.

1. Inject an audio signal of 300Hz 1.5V rms (+5dBm) into the CTCSS input (D-range 1 (PL100) pin 8).

Key the transmitter by earthing the Tx-Key line.

2. Adjust the output from the audio generator to obtain $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation at 300Hz.

3. Change the input frequency to 100Hz and, using PGM800Win, adjust the value of the “Reference Modulation” EPOT setting for the current channel to obtain $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation (you can use either the mouse or up and down arrow keys).

4. Change the input frequency back to 300Hz.

Repeat steps 2 and 3 above until the deviations achieved at the two input frequencies are within 0.2dB of each other. You will need to do this at least four times.

5. Sweep the audio between 50 and 300Hz for peaks.

Note: A peak between 50 and 300Hz will indicate a fault condition, i.e:

- incorrect set-up
- or - modulation circuitry fault.

The specification window is $\pm 1\text{dB}$ relative to 150Hz from 67 to 260Hz.

1. Use the “EDIT FILL” button on the tool bar or go to “Edit”, “Fill”, “Epot Settings” on the menu bar.

3.4.5 CTCSS Encoder (If Used)

Program a CTCSS tone on the default channel using PGM800Win.

If you are using an RF test set, turn off the 300Hz high pass filter.

Key the T856/857 with the front panel "Carrier" switch.

Adjust RV805 (CTCSS level adjust) to give $\pm 500\text{Hz}$ ($\pm 350\text{Hz}$) [$\pm 250\text{Hz}$] deviation.

Set the maximum deviation as per [Section 3.4.6](#).

3.4.6 FM Deviation (Limiter) Adjustment

Note: If the T856/857 will be used over the whole 8MHz switching range, you must set the deviation for each channel. However, if the module will be used on frequencies that cover only a 1MHz (or less) switching range, you can set the deviation on the middle channel and use this value for all other channels with the "EPOT Fill" option in PGM800Win.

Inject 1kHz at -10dBm into the line input (D-range 1 (PL100) pins 1 & 4; pins 2 & 3 shorted; refer to [Section 2.2](#) of Part F).

Adjust RV210 (line sensitivity) fully clockwise and key the transmitter by earthing the Tx-Key line. Using PGM800Win, adjust the value of the "Deviation" EPOT setting for the current channel to obtain a deviation limit of $\pm 4.7\text{kHz}$ ($\pm 3.8\text{kHz}$) [$\pm 2.3\text{kHz}$] (you can use either the mouse or up and down arrow keys).

Sweep the audio frequency from 100Hz to 4kHz and ensure that the maximum deviation does not exceed $\pm 4.7\text{kHz}$ ($\pm 3.8\text{kHz}$) [$\pm 2.3\text{kHz}$]. Readjust "Deviation" if necessary via PGM800Win.

3.4.7 Line-in Level Adjustment

Remove the CTCSS signal (if used).

Set the injected signal at the line input to the required line level (typically -10 to -20dBm).

Adjust RV210 (line sensitivity) to provide $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation.

Reapply the CTCSS signal (if required).

3.5 Audio Processor Links

3.5.1 Link Details

Use the following table to set up the audio processor to the configuration you require. You should set the audio processor links before carrying out any of the tuning and adjustment procedures. The factory settings are shown in brackets [].

Plug	Link ^a		Function
PL205	1-2	A	not connected
	[3-4]	B	microphone pre-amp. output to compressor input
	5-6	C	microphone pre-amp. output to multiplexer input
PL210	[1-2]	L	multiplexer output to pre-emphasis input
	3-4	M	multiplexer output to limiter input
	5-6	N	multiplexer output to compressor input
PL215	1-2	G	not connected
	[3-4]	H	compressor output to multiplexer input
	5-6	I	compressor output to limiter input
	7-8	J	compressor output to pre-emphasis input
	9-10	K	not connected
PL220	1-2	D	pre-emphasis output to multiplexer input
	[3-4]	E	pre-emphasis output to limiter input
	5-6	F	not connected

- a. The letters in this column and in the table in [Section 3.5.2](#) below refer to the identification letters screen printed onto the PCB beside each pair of pins.

3.5.2 Typical Options

	PL205	PL210	PL215	PL220
microphone pre-amp. compressed and pre-emphasised; line input pre-emphasised (standard set-up)	[3-4] B	[1-2] L	[3-4] H	[3-4] E
microphone pre-amp. compressed and pre-emphasised; line input unprocessed	3-4 B	3-4 M	7-8 J	1-2 D
line and microphone compressed and pre-emphasised	5-6 C	5-6 N	7-8 J	3-4 E
microphone pre-amp. compressed; line and microphone flat response	3-4 B	3-4 M	3-4 H	5-6 F

3.6 Synthesiser Alignment

- Ensure that the T856/857 has been programmed with the required frequencies using PGM800Win software.
- **Single Channel** Select a channel using PGM800Win.
Multichannel Select the middle channel via PGM800Win.
- Connect a high impedance voltmeter to the long lead of L1 in the VCO (this measures the synthesiser loop voltage).
- Key the transmitter by earthing the Tx-Key line.
 - Single Channel** Tune VCO trimmer C6 for a synthesiser loop voltage of 10V.
 - Multichannel** Tune VCO trimmer C6 for a synthesiser loop voltage of 10V on the middle channel.

If there is no middle channel, tune C6 so that the channels are symmetrically placed around a loop voltage of 10V.

All channels should lie within the upper and lower limits of 16V and 3V respectively.

Do not attempt to program channels with a greater frequency separation than the specified switching range (8MHz).
- Check that the exciter output power is 1W \pm 300mW (**T857 only**).
- Measure the exciter output frequency and adjust the TCXO (=IC700) trimmer if required.

**Caution:**

This trimmer is susceptible to physical damage. Do not exert a downward force of more than 500g (1lb) when adjusting.

3.7 PA Alignment (T856 Only)

Check that the exciter is connected to the PA with the coaxial link.

Connect an RF power meter to the PA output (use an appropriate attenuator as necessary).

Turn RV310 (power control) fully clockwise.

Note: Before the following measurement is taken, ensure the heatsink is at ambient temperature (20-25°C).

Measure and record the voltage (VL) at L481; perform this measurement at room temperature so that the NTC (R481) is close to 25°C.

Key the transmitter by earthing the Tx-Key line.

Tune #CV475 until maximum power is obtained. Check that the power exceeds 30W.

Adjust RV310 (power control) to 25W.

Readjust #CV475 to reduce the supply current by up to 0.5A.

3.8 Thermal Shutdown (T856 Only)

Key the transmitter by earthing the Tx-Key line and set the output power to 25W as described in [Section 3.7](#).

Short L481 to ground.

Set RV330 (shutdown power level) for an output power of 5W.

Set RV320 (shutdown temperature) to 0.16VL volts (measured at IC350 pin 3), where VL is the voltage measured at L481 in [Section 3.7](#). This sets the thermal shutdown at 85°C at NTC R481.

3.9 Audio Processor & CTCSS

3.9.1 Two Point Modulation

The T856 and T857 utilise two point modulation to obtain a wide audio bandwidth independent of the synthesiser loop filter response. This is achieved by simultaneously frequency modulating the VCO and phase modulating the synthesiser reference frequency. The relative signal levels fed to the two modulators are quite critical and cause interaction when setting up.

Both modulating signals require readjustment when the exciter is shifted in frequency greater than the switching range (i.e. $\Delta F > \pm 4\text{MHz}$).

Note 1: In this and following sections deviation settings are given first for wide bandwidth sets, followed by settings in brackets for mid bandwidth sets () and narrow bandwidth sets [].

Note 2: The reference modulation and limiter adjustments are controlled by 256-step electronic potentiometers (EPOTs), which are adjusted via the “Reference Modulation” and “Deviation” settings in PGM800Win. This allows the two point modulation and deviation settings to be adjusted for each channel.

Note 3: To optimise the modulation response across the switching range, repeat steps 1-4 below for each channel that will be used (usually needed only for data applications). In applications where the modulation response is less critical (e.g. voice use only), carry out steps 1-4 below on the middle channel and use the “EPOT Fill” option¹ in PGM800Win to copy the value to the other channels.

Note 4: If you are using an RF test set, turn the low pass filter off and set the high pass filter to 15kHz *before* beginning this procedure.

3.9.2 Modulator Adjustment

1. Inject an audio signal of 300Hz 1.5V rms (+5dBm) into the CTCSS input (D-range 1 (PL100) pin 8).

Key the transmitter by earthing the Tx-Key line.

2. Adjust the output from the audio generator to obtain $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation at 300Hz.
3. Change the input frequency to 100Hz and, using PGM800Win, adjust the value of the “Reference Modulation” EPOT setting for the current channel to obtain $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation (you can use either the mouse or up and down arrow keys).

-
1. Use the “EDIT FILL” button on the tool bar or go to “Edit”, “Fill”, “Epot Settings” on the menu bar.

4. Change the input frequency back to 300Hz.

Repeat steps 2 and 3 above until the deviations achieved at the two input frequencies are within 0.2dB of each other. You will need to do this at least four times.

5. Sweep the audio between 50 and 300Hz for peaks.

Note: A peak between 50 and 300Hz will indicate a fault condition, i.e:

- incorrect set-up
- or - modulation circuitry fault.

The specification window is $\pm 1\text{dB}$ relative to 150Hz from 67 to 260Hz.

3.9.3 CTCSS Encoder (If Used)

Program a CTCSS tone on the default channel using PGM800Win.

If you are using an RF test set, turn off the 300Hz high pass filter.

Key the T856/857 with the front panel "Carrier" switch.

Adjust RV805 (CTCSS level adjust) to give $\pm 500\text{Hz}$ ($\pm 350\text{Hz}$) [$\pm 250\text{Hz}$] deviation.

Set the maximum deviation as per [Section 3.9.4](#).

3.9.4 Limiter Adjustment

Note: If the T856/857 will be used over the whole 8MHz switching range, you must set the deviation for each channel. However, if the module will be used on frequencies that cover only a 1MHz (or less) switching range, you can set the deviation on the middle channel and use this value for all other channels with the "EPOT Fill" option in PGM800Win.

Set the links in the audio processor section as required (refer to [Section 3.5](#)).

Inject 1kHz at -10dBm into the line input (D-range 1 (PL100) pins 1 & 4; and pins 2 & 3 shorted; refer to [Section 2.2](#) of Part F).

Adjust RV210 (line sensitivity) fully clockwise and key the transmitter by earthing the Tx-Key line. Using PGM800Win, adjust the value of the "Deviation" EPOT setting for the current channel to obtain a deviation limit of $\pm 4.7\text{kHz}$ ($\pm 3.8\text{kHz}$) [$\pm 2.3\text{kHz}$] (you can use either the mouse or up and down arrow keys).

Sweep the audio frequency from 100Hz to 4kHz and ensure that the maximum deviation does not exceed $\pm 4.7\text{kHz}$ ($\pm 3.8\text{kHz}$) [$\pm 2.3\text{kHz}$]. Readjust "Deviation" if necessary via PGM800Win.

3.9.5 Line Level Without Compressor

This section assumes that the compressor is not used. If the compressor is required, refer to [Section 3.9.6](#).

Remove the CTCSS signal (if used).

Adjust the line sensitivity as follows:

- set the injected signal at the line input to the required line level (typically -10 to -20dBm);
- adjust RV210 (line sensitivity) to provide $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation.

Reapply the CTCSS signal (if required).

3.9.6 Compressor

The compressor may be used on the line input only, the microphone input only, or on both the line and microphone inputs. If the compressor is used, refer to one of the following sections as appropriate.

3.9.6.1 Compressor On Line Input Only

Set RV210 (line sensitivity) fully clockwise and key the transmitter by earthing the Tx-Key line.

Reduce the line level to -50dBm at 1kHz and set RV220 (compression level) fully clockwise.

Check that $\pm 3\text{kHz}$ deviation ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] is still available.

Slowly increase the audio input level until the demodulated waveform shows significant signs of clipping (approximately $\pm 4.5\text{kHz}$ ($\pm 3.6\text{kHz}$) [$\pm 2.3\text{kHz}$] deviation).

Adjust RV220 anticlockwise until the demodulated waveform is just clipping (approximately $\pm 4\text{kHz}$ ($\pm 3.2\text{kHz}$) [$\pm 2\text{kHz}$] deviation).

Increase the input level to -10dBm and check that the test tone is still held just into clipping. The input line level should be typically -10 to -20dBm.

3.9.6.2 Compressor On Microphone Input Only

Key the transmitter by earthing the Tx-Key line and plug a microphone jack into the front panel socket.

Adjust RV220 (compression level) fully clockwise.

Acoustically couple the microphone to a tone box (1kHz) and close the PTT switch.

Increase the audio level until the demodulated waveform shows significant signs of clipping (approximately $\pm 4.5\text{kHz}$ ($\pm 3.6\text{kHz}$) [$\pm 2.3\text{kHz}$] deviation).

Adjust RV220 anticlockwise until the demodulated waveform is just clipping (approximately $\pm 4\text{kHz}$ ($\pm 3.2\text{kHz}$) [$\pm 2\text{kHz}$] deviation).

Increase the audio level by 10dB and verify that the test tone is held just into clipping.

Whistle steadily into the microphone, checking that approximately $\pm 4\text{kHz}$ ($\pm 3.2\text{kHz}$) [$\pm 2\text{kHz}$] deviation is produced. The modulated waveform should be basically sinusoidal.

Speak into the microphone, checking that the modulation peaks reach about $\pm 5\text{kHz}$ ($\pm 4\text{kHz}$) [$\pm 2.5\text{kHz}$] deviation.

As the line is to be used without compression, set RV210 (line sensitivity) as described in [Section 3.9.5](#).

3.9.6.3 Compressor On Both Line & Microphone Inputs

Set up as described in [Section 3.9.6.1](#).

4 T856/857 Functional Testing



Caution: This equipment contains CMOS devices which are susceptible to damage from static charges. Refer to [Section 1.2](#) in Part A for more information on anti-static procedures when handling these devices.

The following test procedures will confirm that the T856/857 has been tuned and adjusted correctly and is fully operational.

Note 1: In this and following sections deviation settings are given first for wide bandwidth sets, followed by settings in brackets for mid bandwidth sets () and narrow bandwidth sets [].

Note 2: Unless otherwise specified, the term "PGM800Win" used in this and following sections refers to version 2.00 and later of the software.

Refer to [Figure 4.4](#) and [Figure 4.5](#) for the location of the main tuning and adjustment controls, and to [Section 3.3](#) for the test equipment set-up. Refer also to Section 6 where the parts lists, grid reference index and diagrams will provide detailed information on identifying and locating components and test points on the main PCB. The parts list and diagrams for the VCO PCB are in Part E.

The following topics are covered in this section.

Section	Title	Page
4.1	Current Consumption	4.3
4.2	Output Power	4.3
4.3	Output Frequency	4.3
4.4	Timers	4.3
4.5	Frequency Response	4.4
4.6	Audio Level Input Sensitivity	4.7

Figure	Title	Page
4.1	T856/857 Transmit Timers	4.4
4.2	T856/857 Pre-emphasis Response	4.5
4.3	T856/857 Limiting Response	4.6
4.4	T856 Main Tuning & Adjustment Controls	4.9
4.5	T857 Main Tuning & Adjustment Controls	4.11

4.1 Current Consumption

Connect the T856/857 to a 13.8V power supply.

Connect an RF power meter to the T856/857 output socket.

Check that the current in the 13.8V power cable is less than 150mA.

Key the T856/857 by earthing the Tx-Key line (the carrier "On" LED should light).

T856 Only: Adjust RV310 (power control) to obtain 25W output power.

Check that the current is as follows:

T856	<5.5A
T857	<750mA.

4.2 Output Power

Connect an RF power meter with suitable attenuation to the T856/857 output socket.

Key the T856/857 by earthing the Tx-Key line.

Check that:

T856	the output power adjusts to $\geq 25\text{W}$ with RV310 (power control) turned fully clockwise
T857	the output power is $1\text{W} \pm 300\text{mW}$.

4.3 Output Frequency

Connect the T856/857 output to a frequency counter via an attenuator pad:

T856	40dB pad
T857	20dB pad.

Measure the output frequency and, if necessary, adjust the TCXO (=IC700) to trim to the nominal frequency ($\pm 100\text{Hz}$).

4.4 Timers

The transmit tail timer, transmit timeout timer and transmit lockout timer can all be set from PGM800Win. The fields for setting these are found on the system information page. These three timers operate as follows (refer also to [Figure 4.1](#)):

Timer	Function	Adjustment
Transmit Tail	Sets the tail time during which the transmitter stays keyed after the external key source has been removed.	0-5 seconds in 100ms steps ^a
Transmit Timeout	Sets the maximum continuous transmission time. Once the timer has timed out, the transmitter must be keyed again, unless prevented by the transmit lockout timer.	0-300 seconds ^b in 10 second steps
Transmit Lockout	Sets the period of time that must elapse after a timeout before the transmitter can re-transmit. Once the timer has timed out, the transmitter can be keyed again.	0-60 seconds in 10 second steps

- a. Adjustable in 20ms steps in PGM800Win version 2.12 and later.
b. Adjustable in 20ms steps in PGM800Win version 2.12 and later.

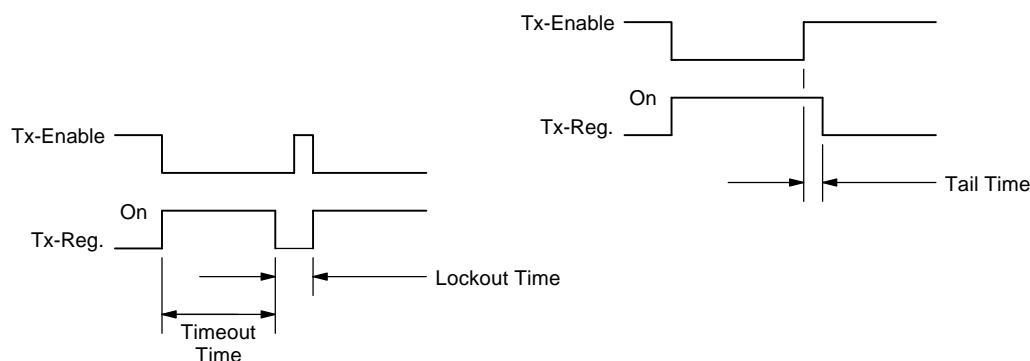


Figure 4.1 T856/857 Transmit Timers

4.5 Frequency Response

If the T856/857 has been correctly adjusted, the pre-emphasis and limiting responses should closely match those shown in Figure 4.2 and Figure 4.3 respectively.


Note: The limits shown on these graphs should not be exceeded.

- If you are using an RF test set, turn off all filters.
- Measure the pre-emphasis response as follows:
 - Reduce the line level to give $\pm 1\text{kHz}$ ($\pm 0.8\text{kHz}$) [$\pm 0.5\text{kHz}$] deviation at 1kHz.
 - Sweep the modulation frequency.
 - The response should closely match that shown in Figure 4.2.
- Measure the limiting response as follows:
 - Set the line level to give $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation at 1kHz.

Increase the line level 20dB and sweep the modulation frequency.

The response should closely match that shown in [Figure 4.3](#).

Wide Bandwidth

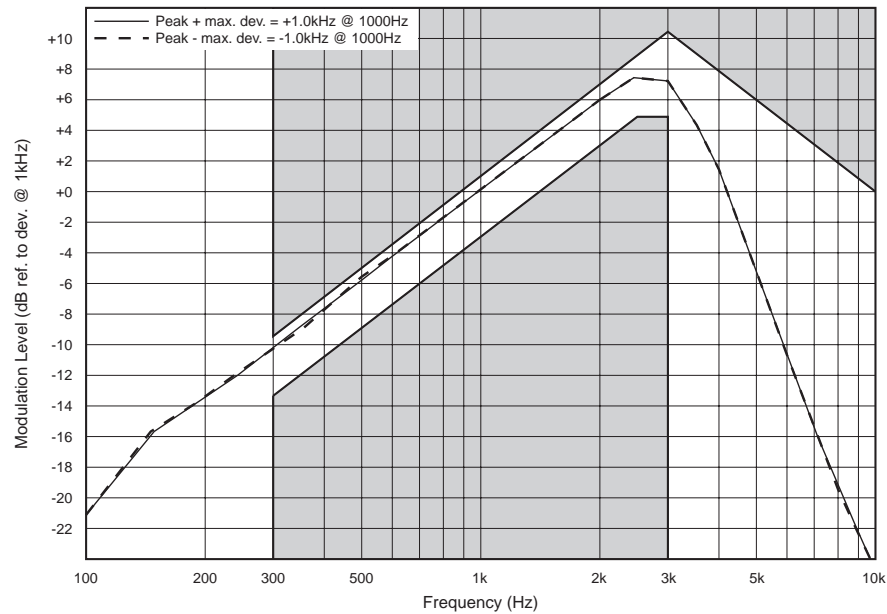

Mid Bandwidth

The mid bandwidth graph is the same shape as the wide bandwidth graph. The deviation figures are as follows:

peak + max. deviation = +0.8kHz

peak - max. deviation = -0.8kHz.

Narrow Bandwidth


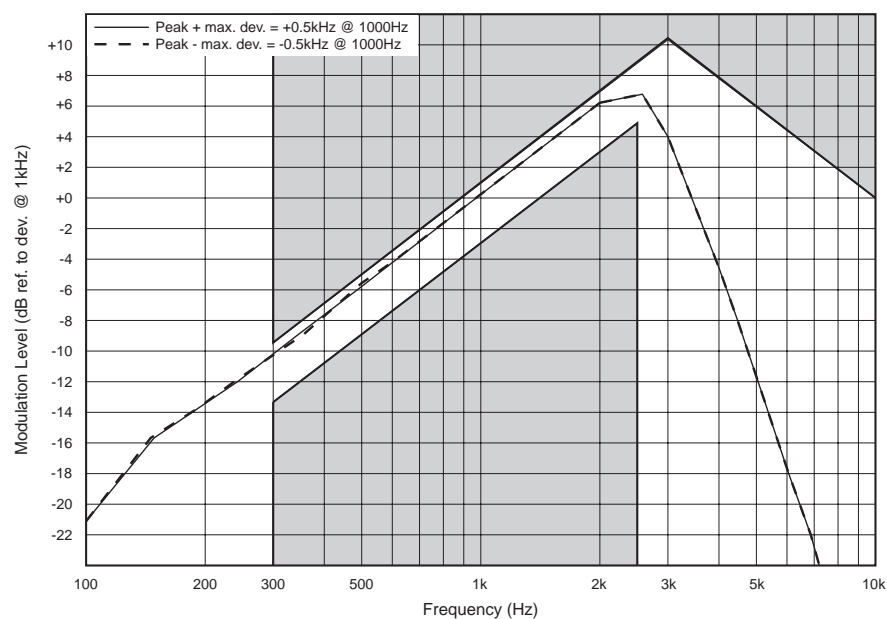


Figure 4.2 T856/857 Pre-emphasis Response

Wide Bandwidth

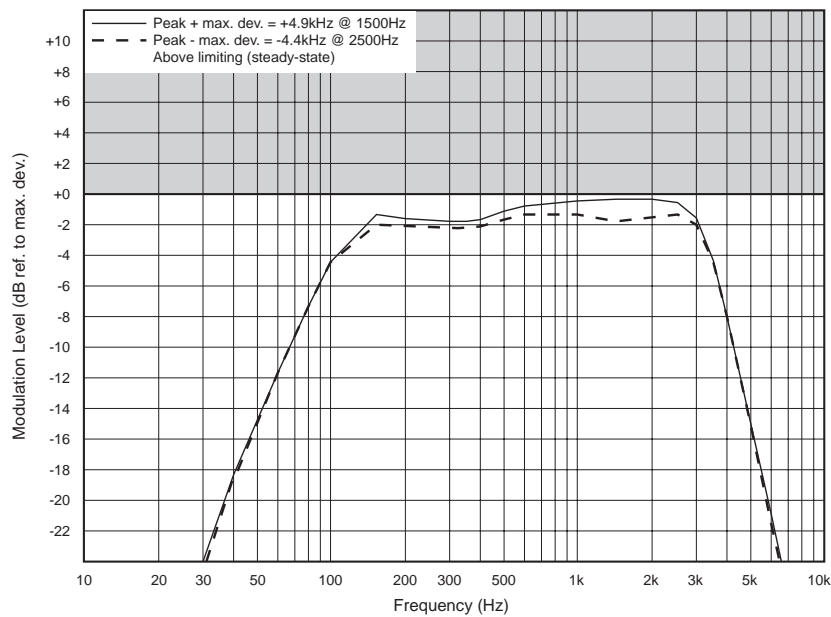

Mid Bandwidth

The mid bandwidth graph is the same shape as the wide bandwidth graph. The deviation figures are as follows:

peak + max. deviation = +4kHz
 peak - max. deviation = -4kHz.

Narrow Bandwidth

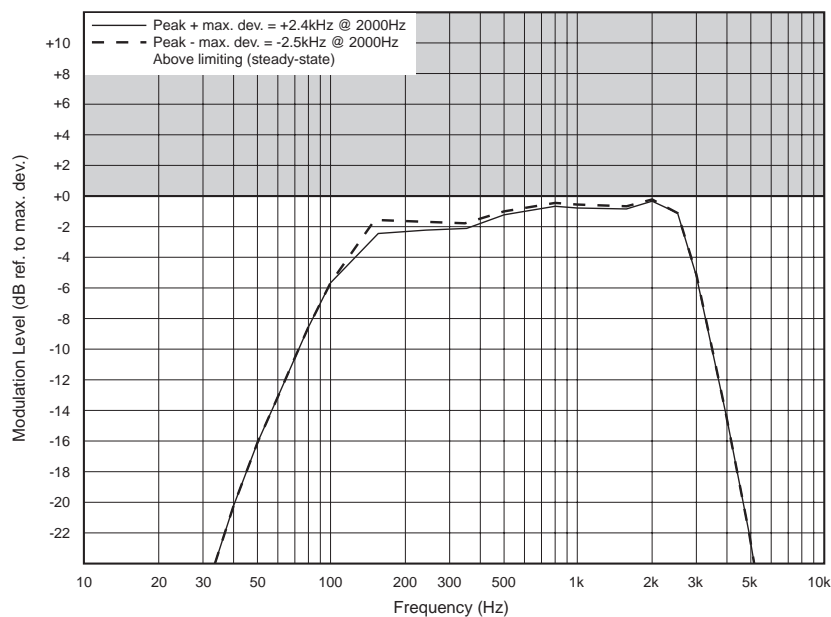


Figure 4.3 T856/857 Limiting Response

4.6 Audio Level Input Sensitivity

- Adjust RV210 (line sensitivity) fully clockwise.
- Check that the input sensitivities are better than those specified below:

Line Input	600 ohms, $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation at 1kHz: with compressor -50dBm without compressor -30dBm
Microphone Input	600 ohms, $\pm 3\text{kHz}$ ($\pm 2.4\text{kHz}$) [$\pm 1.5\text{kHz}$] deviation at 1kHz: with compressor -75dBm without compressor -55dBm
CTCSS Input	1kHz deviation at 150Hz 500mV rms

Note: A degraded signal to noise ratio can be expected with the compressor selected. The extent of the degradation is dependent on the audio input level.

The photograph printed at right will help you to identify the main controls used in tuning and adjusting the T856.

There is a similar photograph in [Figure 1.1](#) which shows the main circuit blocks.

Extending both these fold-outs will allow you to refer to both photographs while using the manual.

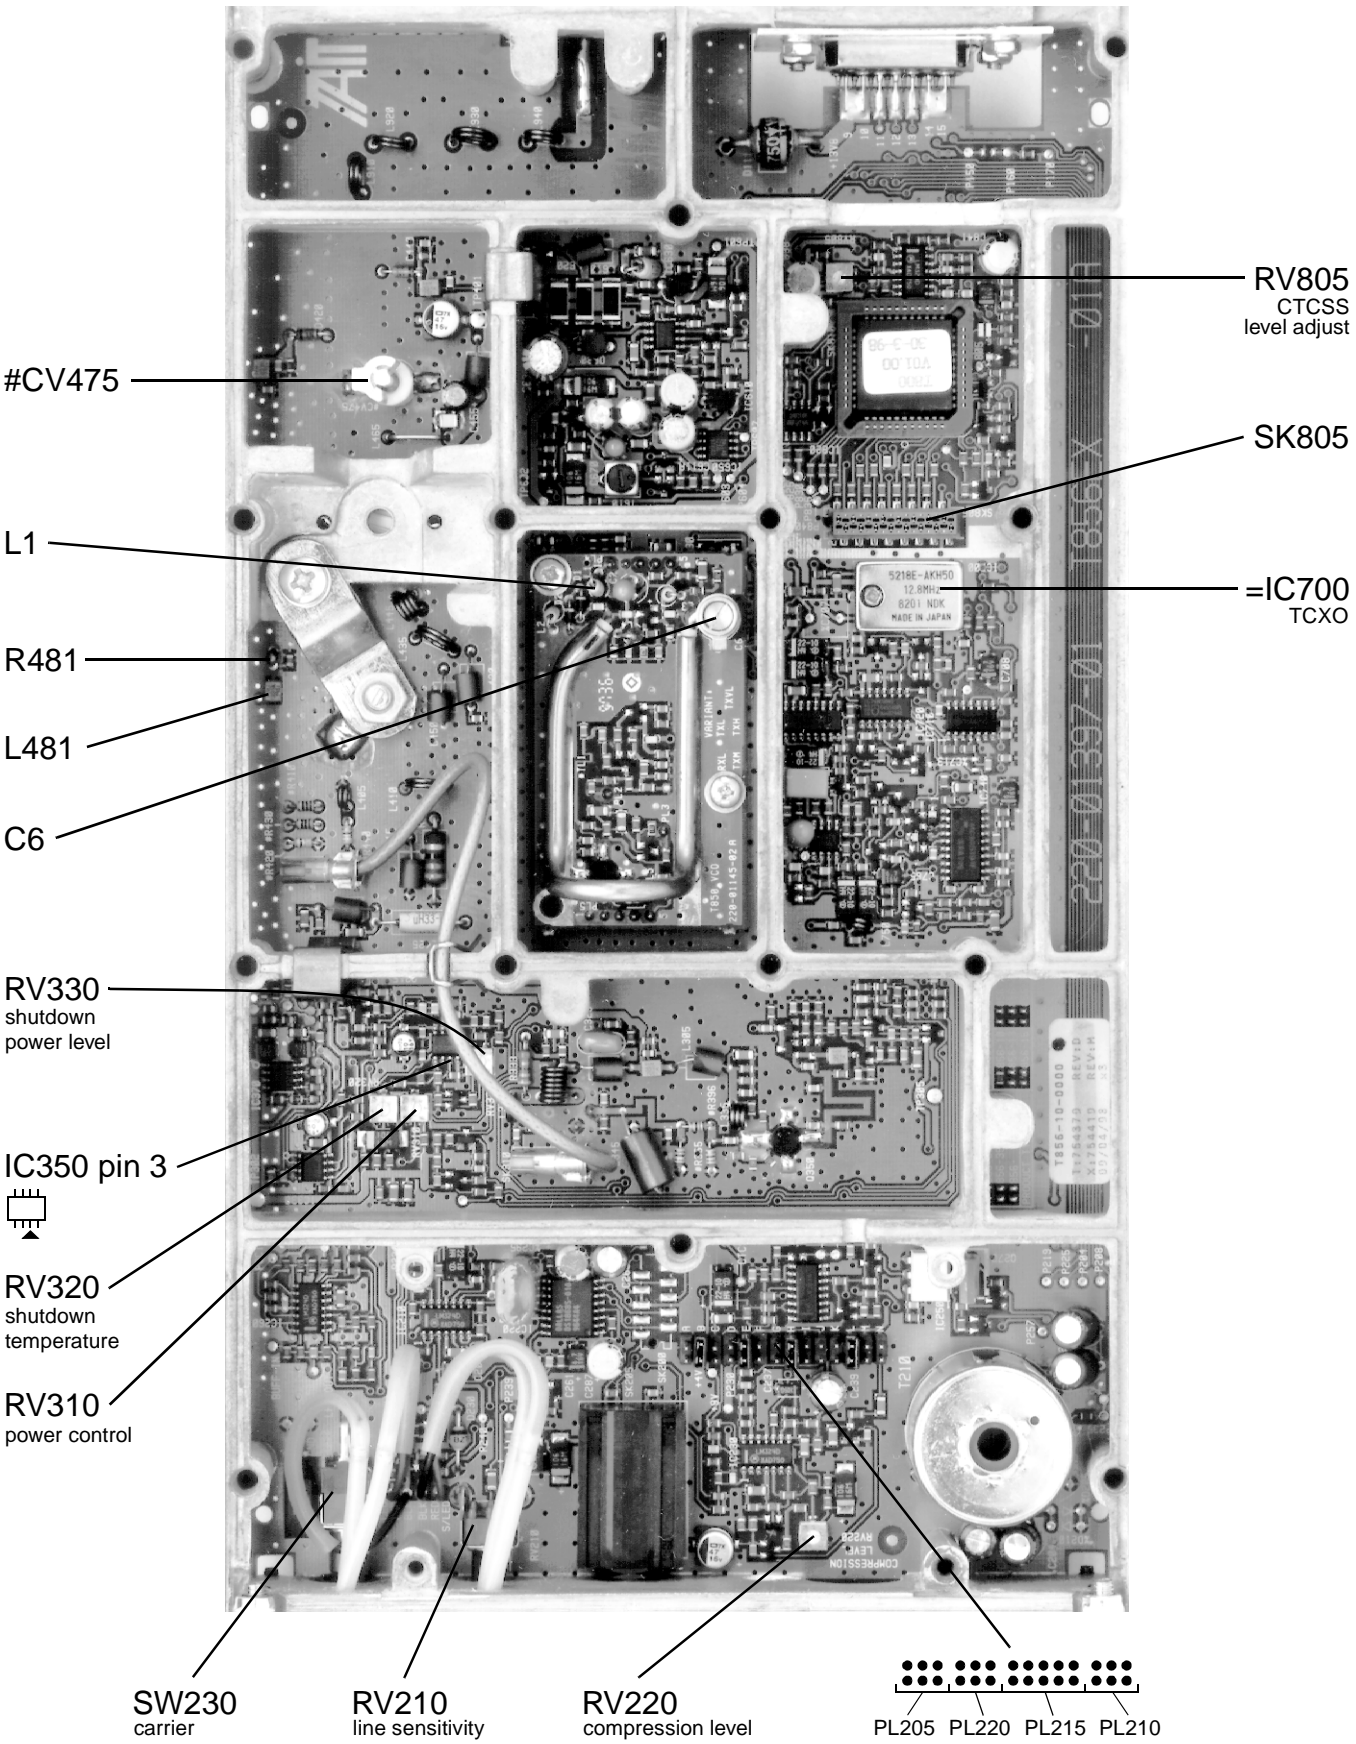


Figure 4.4 T856 Main Tuning & Adjustment Controls

The photograph printed at right will help you to identify the main controls used in tuning and adjusting the T857.

There is a similar photograph in [Figure 1.3](#) which shows the main circuit blocks.

Extending both these fold-outs will allow you to refer to both photographs while using the manual.

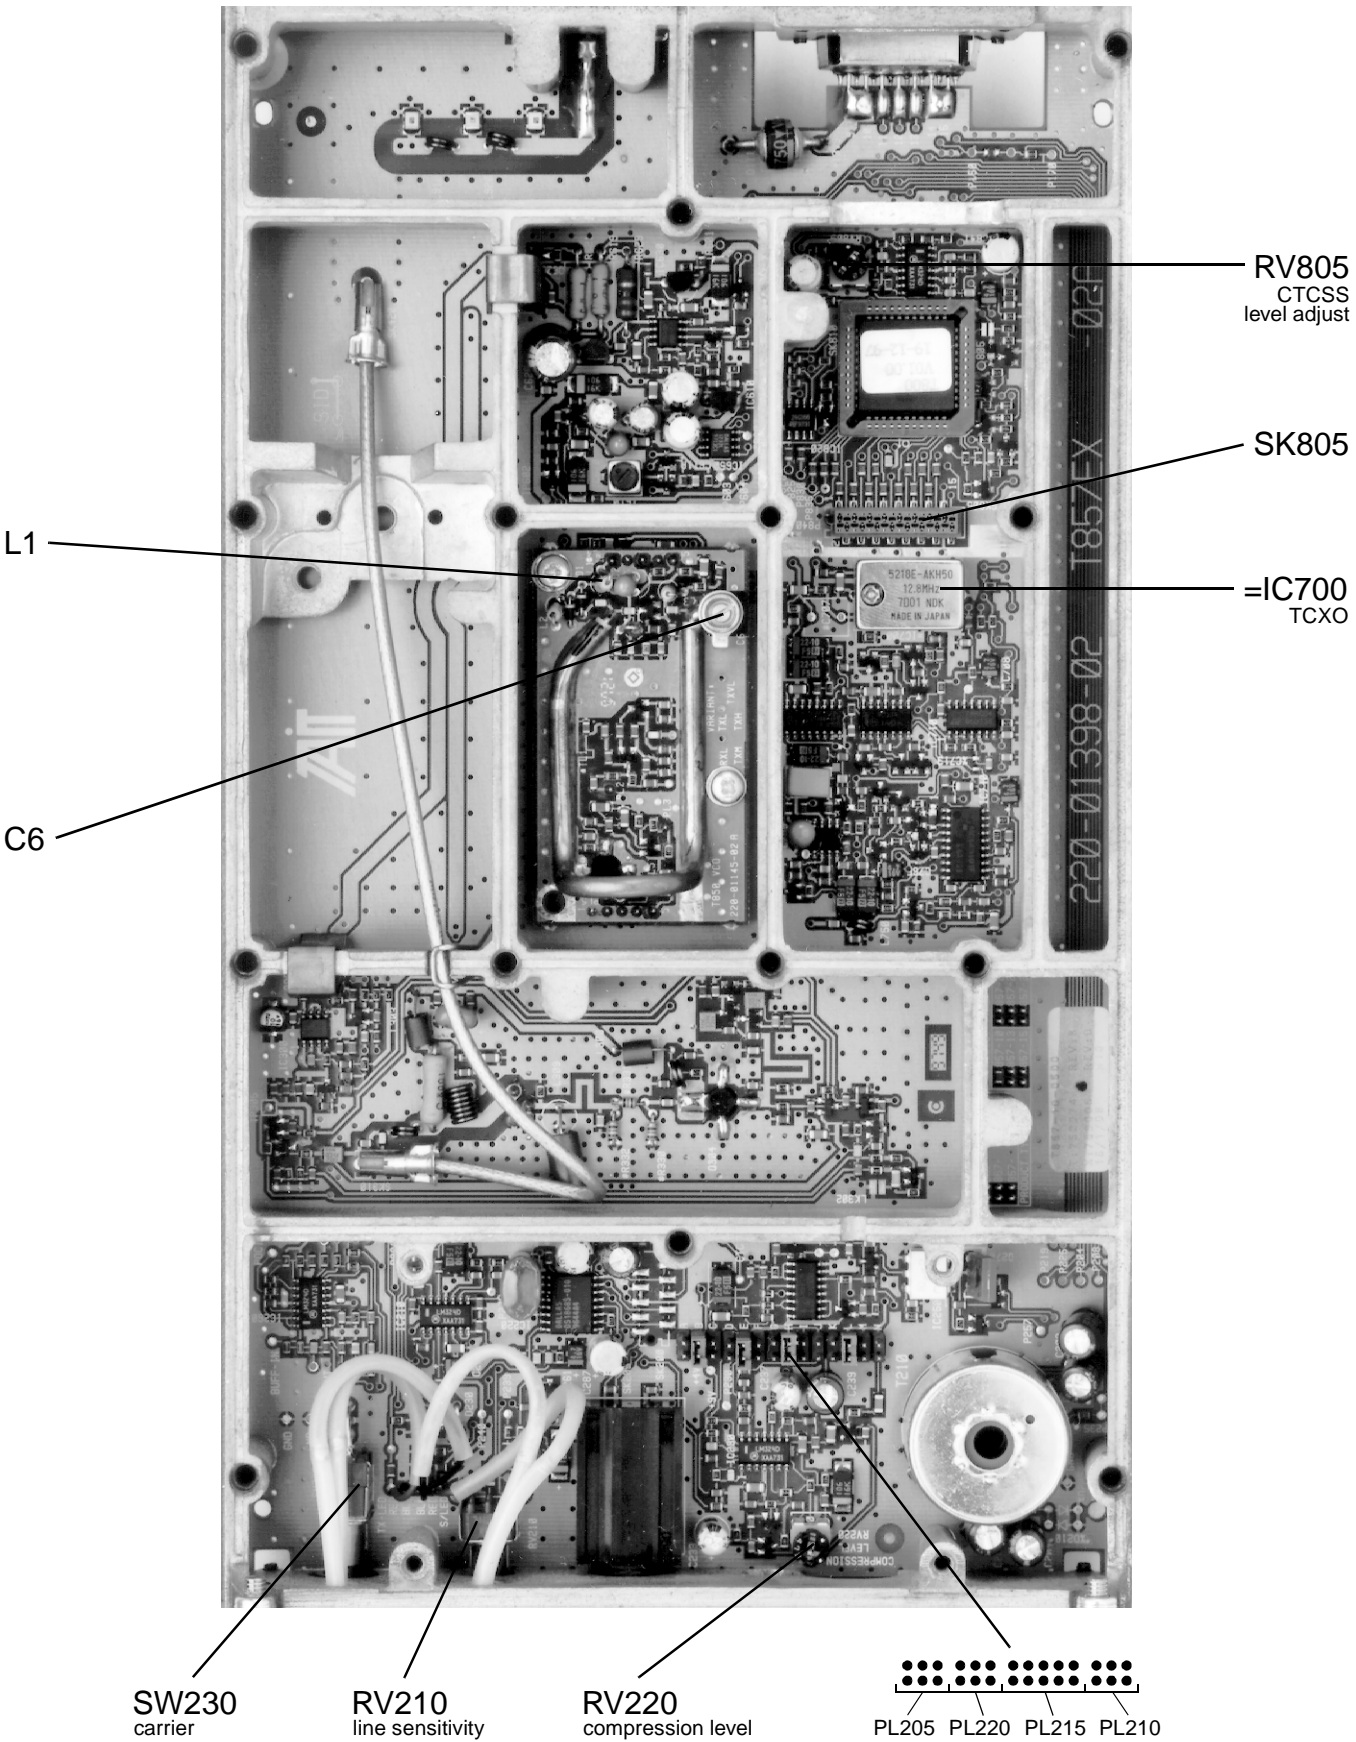


Figure 4.5 T857 Main Tuning & Adjustment Controls

5 T856/857 Fault Finding



Caution: This equipment contains CMOS devices which are susceptible to damage from static charges. Refer to [Section 1.2](#) in Part A for more information on anti-static procedures when handling these devices.

The following test procedures and fault finding flow charts may be used to help locate a hardware problem, however they are by no means a complete fault finding procedure. If you still cannot trace the fault after progressing through them in a logical manner, contact your nearest Tait Dealer or Customer Service Organisation. If necessary, you can get additional technical help from Customer Support, Radio Systems Division, Tait Electronics Ltd, Christchurch, New Zealand (full contact details are on page 2).

Note 1: In this and following sections deviation settings are given first for wide bandwidth sets, followed by settings in brackets for mid bandwidth sets () and narrow bandwidth sets [].

Note 2: Unless otherwise specified, the term "PGM800Win" used in this and following sections refers to version 2.00 and later of the software.

Refer to Section 6 where the parts lists, grid reference index and diagrams will provide detailed information on identifying and locating components and test points on the main PCB. The parts list and diagrams for the VCO PCB are in Part E.

The following topics are covered in this section

Section	Title	Page
5.1	Visual Checks	5.3
5.2	Component Checks	5.3
5.3	Front Panel LED Indicator	5.3
5.4	DC Checks	5.4
5.4.1	Power Rails	5.4
5.4.2	VCO Locking	5.4
5.5	RF Checks	5.5
5.5.1	T856 Drive Power	5.5
5.5.2	T856 PA Output Power	5.5
5.5.3	T857 Output Power	5.5
5.5.4	Audio And Modulation	5.6
5.6	PGM800Win Generated Errors	5.7

Section	Title	Page
5.7	Fault Finding Charts	5.8
5.7.1	Microcontroller	5.8
5.7.1.1	Basic Checks	5.8
5.7.1.2	Serial Communications	5.9
5.7.1.3	CTCSS Encode	5.10
5.7.2	Regulator	5.11
5.7.3	Synthesiser	5.12
5.7.4	T856 Drive Amplifier	5.15
5.7.5	T856 PA & Power Control	5.16
5.7.6	T857 Exciter Drive Amplifier	5.17
5.7.7	Audio Processor	5.18
5.8	To Replace The T856 PA Transistors (Q410 & Q420)	5.19

Figure	Title	Page
5.1	RF Diode Probe Circuit	5.5
5.2	Typical Transistor/Capacitor Spacing (Not To Scale)	5.19

5.1 Visual Checks

Remove the covers from the T856/857 and inspect the PCB for damaged or broken components, paying particular attention to the surface mounted devices (SMD's).

Check for defective solder joints. If repair or replacement is considered necessary, refer to [Section 3](#) of Part A.

5.2 Component Checks

If you suspect a transistor is faulty, you can assess its performance by measuring the forward and reverse resistance of the junctions. Unless the device is completely desoldered, first make sure that the transistor is not shunted by some circuit resistance. Use a good quality EVM (e.g. Fluke 75) for taking the measurements (or a 20k ohm/V or better multimeter, using only the medium or low resistance ranges).

The collector current drawn by multi-junction transistors is a further guide to their performance.

If an IC is suspect, the most reliable check is to measure the DC operating voltages. Due to the catastrophic nature of most IC failures, the pin voltages will usually be markedly different from the recommended values in the presence of a fault. The recommended values can be obtained from either the circuit diagram or the component data catalogue.

5.3 Front Panel LED Indicator

The green "Supply" LED on the T856/857 front panel will flash according to the conditions described in the following table:

Flash Rate	Condition
<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> </div> <div> <p style="text-align: center;">fast</p> <p style="text-align: center;">(1/3 sec. on/1/3 sec. off approx.)</p> </div> </div>	T856/857 is linked with PGM800Win
<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 2px;"></div> </div> <div> <p style="text-align: center;">unequal</p> <p style="text-align: center;">(1/3 sec. on/1 sec. off approx.)</p> </div> </div>	microcontroller has detected an internal communications error - refer to Section 5.7.1

Where two or more conditions occur at the same time, the precedence is in the order shown above (i.e. T856/857 linked has the highest priority, followed by internal error).

5.4 DC Checks

5.4.1 Power Rails

Refer to the test points and options diagrams in Section 6 for test point locations, and to the regulator fault finding chart ([Section 5.7.2](#)) for fault diagnosis.

Check the 13.8V (TP601) and 9V (TP602) supplies at their test points in the regulator compartment with a DMM.

Check the 5V (TP604) and 20V (TP603) rails at their respective test points in the regulator compartment.

Check that Tx-Reg. (TP305 in the exciter compartment) comes up to 8.8V when the exciter is keyed.

Check the +5V digital regulator output (TP607 in the regulator compartment).

T856 Only: Check the 9V supply (IC370 pin 1) with a DMM.

Check for short circuits.

5.4.2 VCO Locking

Key the exciter.

Using a DMM, monitor the VCO control voltage on the long lead of L1 on the VCO PCB.

If the synthesiser is locked and the VCO aligned, the voltage at this point should be between 3 and 16V.

If the VCO is not locked, refer to the synthesiser fault finding chart ([Section 5.7.3](#)).

5.5 RF Checks

In-circuit RF levels may be measured with an RF probe on which the earth lead has been shortened to a minimum (i.e. 13mm). Refer to the circuit diagrams for typical levels.

Figure 5.1 shows a suitable RF probe circuit..

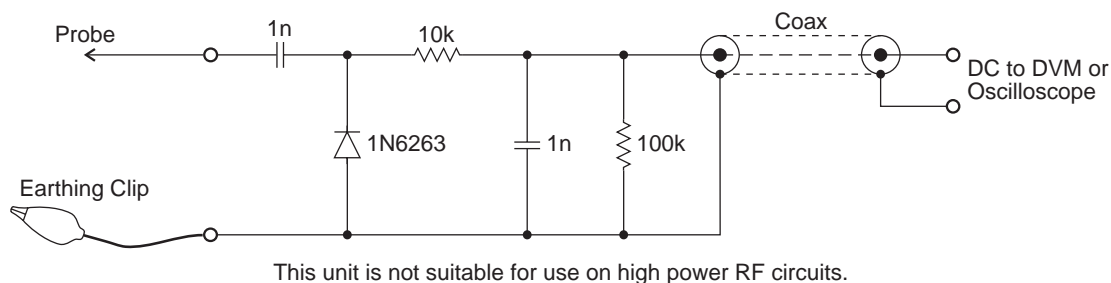


Figure 5.1 RF Diode Probe Circuit

5.5.1 T856 Drive Power

Refer to the drive amplifier fault finding chart ([Section 5.7.4](#)).

Ensure that the VCO locks (refer to [Section 5.4.2](#)).

Connect the drive output to a power meter and key the transmitter.

Check that the exciter output power (SK310) is >1.5W.

Note: If the synthesiser is out of lock, the lock detector (synthesiser IC740 and comparator IC750) will prevent the RF signal from reaching the PA by switching the supply to the exciter amplifier (Q350, Q355).

5.5.2 T856 PA Output Power

Reconnect the drive output to the PA input.

Connect the PA to a power meter and key the transmitter.

Check that the output power is >30W with RV310 (power control) adjusted fully clockwise.

5.5.3 T857 Output Power

Refer to the exciter drive amplifier fault finding chart ([Section 5.7.6](#)).

Ensure that the VCO locks (refer to [Section 5.4.2](#)).

Connect the exciter output to a power meter and key the exciter.

Check that the output power is $1\text{W} \pm 300\text{mW}$.

Note: If the synthesiser is out of lock, the lock detector (synthesiser IC740 and comparator IC750) will prevent the RF signal from reaching the PA by switching the supply to the exciter amplifier (Q301, IC300, Q302, Q303).

5.5.4 Audio And Modulation

Refer to the audio processor fault finding chart ([Section 5.7.7](#)).

Set up the audio processor as described in [Section 3.9](#).

Check that the demodulated RF output has the frequency response referred to in [Section 4.5](#) with at least $\pm 5\text{kHz}$ ($\pm 4\text{kHz}$) [$\pm 2.5\text{kHz}$] deviation available at 1kHz modulating frequency.

If the above result is not achieved, either the two modulators are incorrectly adjusted or a fault condition exists.

5.6 PGM800Win Generated Errors

The following errors are those most likely to occur using PGM800Win. Refer to the PGM800Win software user's manual for a complete list of error messages.

Channel Switch Set

The programmed default channel change was not accepted by the base station because a channel is selected externally. Try turning the external channel switch off to change the default channel in PGM800Win.

Synth Out Of Lock

The synthesiser received incorrect data, or the data was corrupted. Enter a frequency within the VCO switching range, or tune the VCO.

Internal Error

Data could not be read from the base station due to an internal error. Check for shorts or open circuits on the SDA, SCK, SYNTH and EPOT lines. The SDA, SCK and SYNTH are normally high, and the EPOT is normally low.

Write/Read To An Unlinked Module

The link to the module does not exist. Undefined error.


5.7 Fault Finding Charts

Note: The standard test point designations used in this section are as follows:


TP601	13.8V
TP602	9V
TP603	20V
TP604	5V

5.7.1 Microcontroller (IC810)


5.7.1.1 Basic Checks

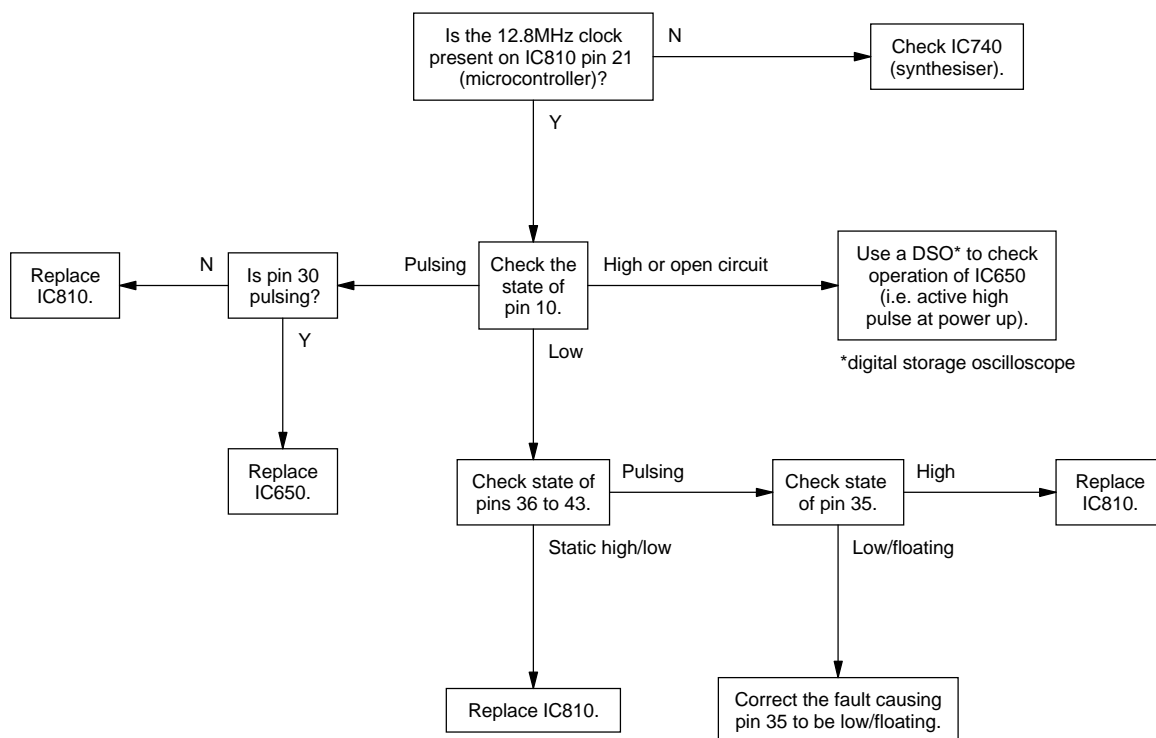


5.7.1.2 Serial Communication

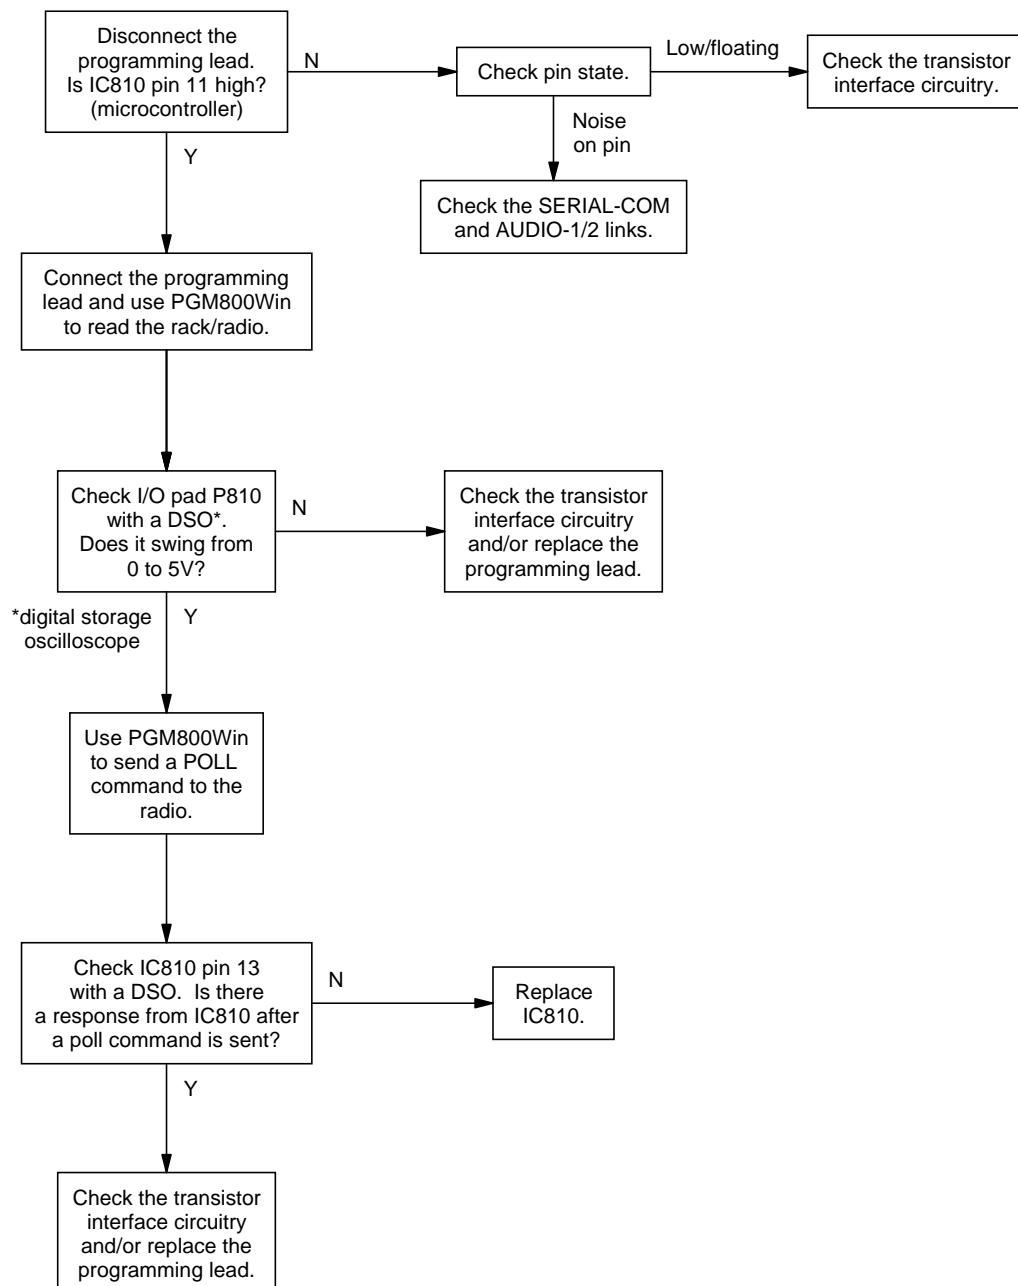

5.7.1.3 CTCSS Encode

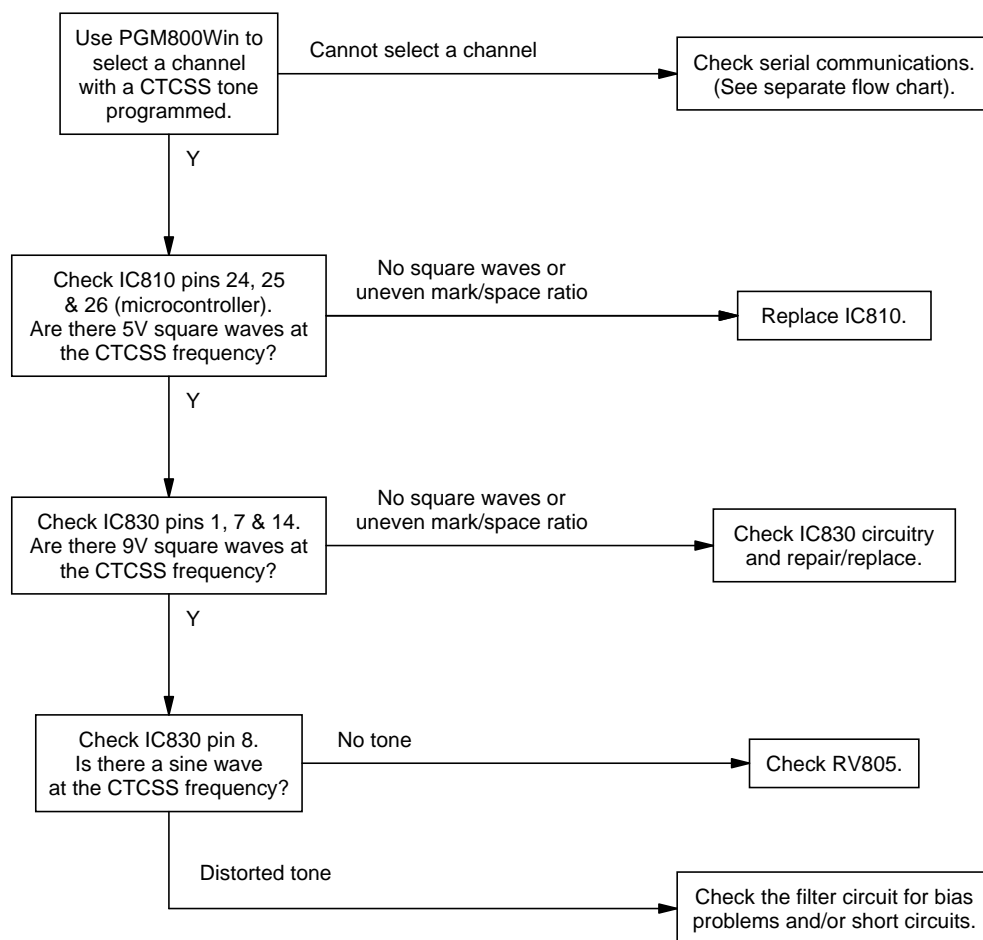



5.7.2 Regulator

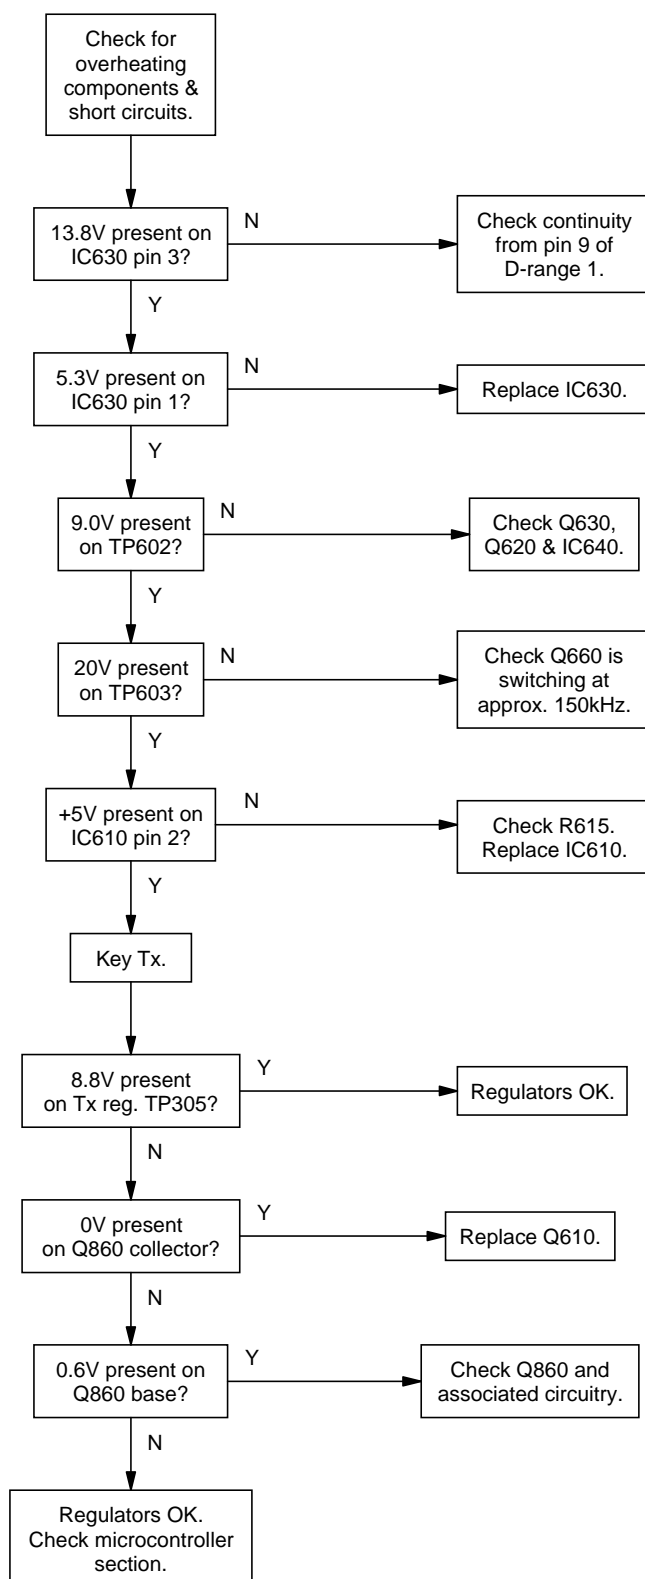


5.7.3 Synthesiser


Refer to the synthesiser circuit diagram (sheet 7) in Section 6 and the VCO circuit diagram in Part E.

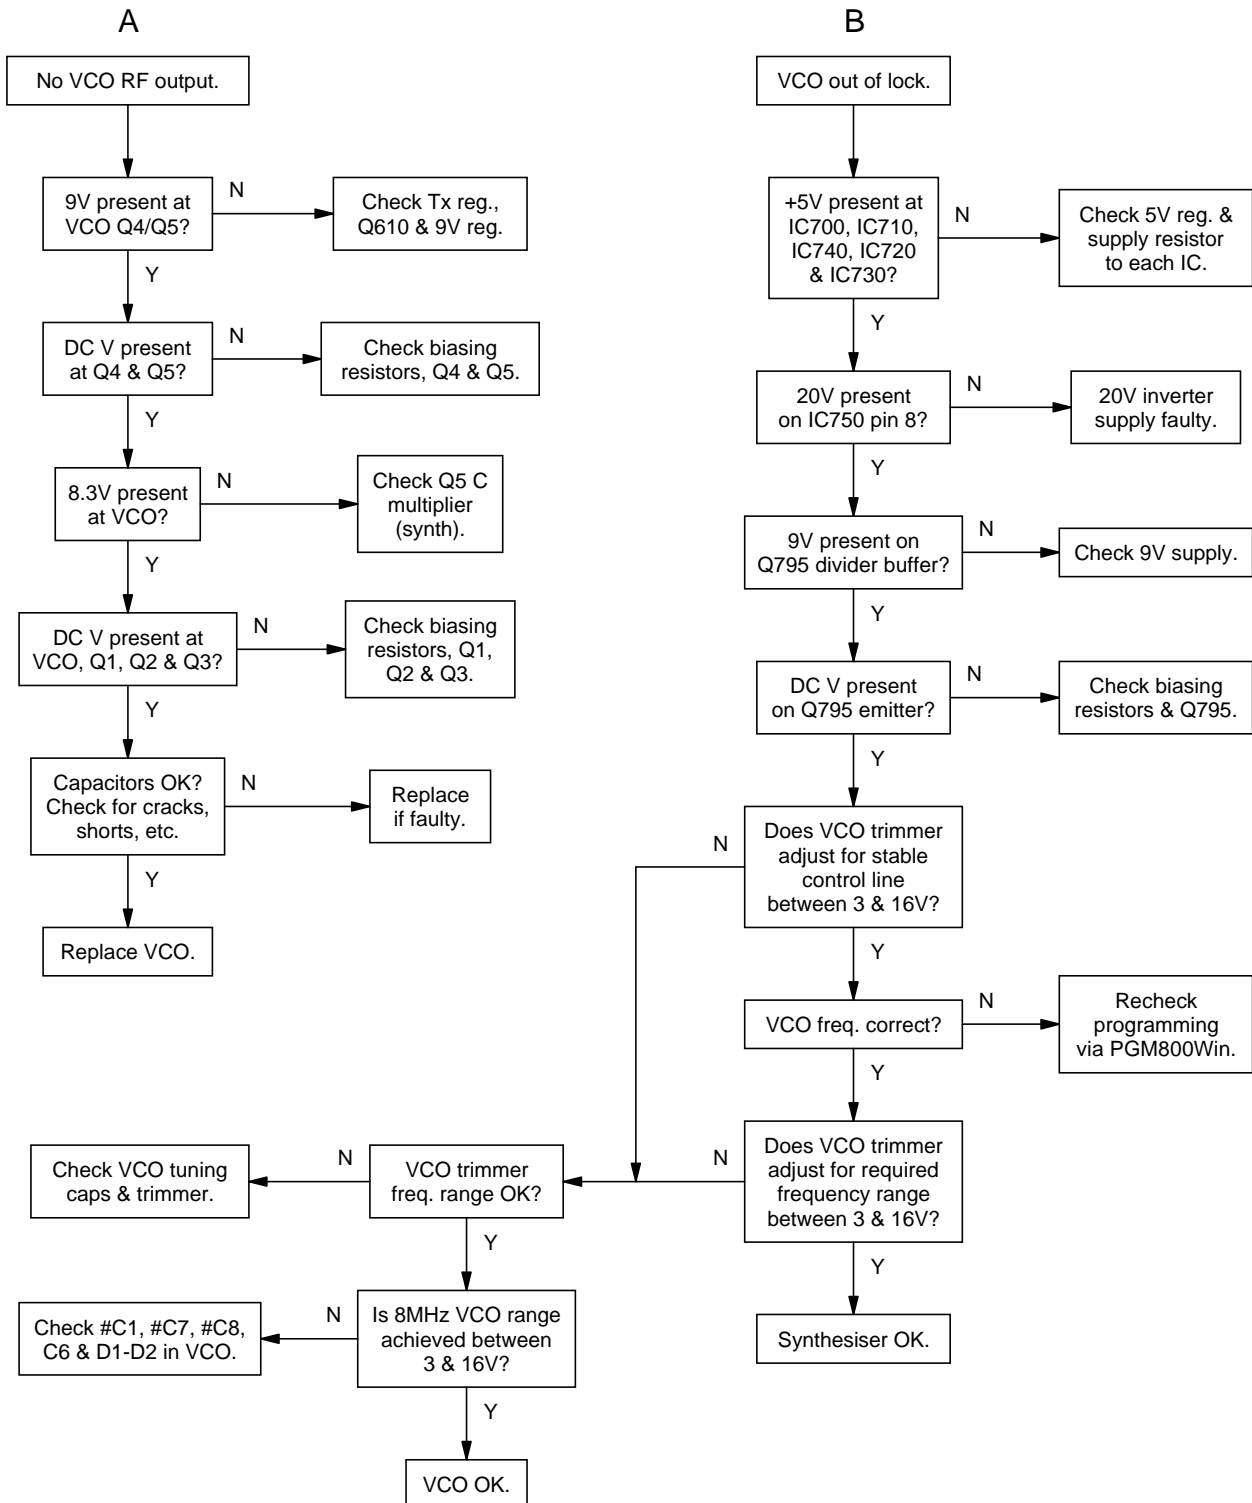

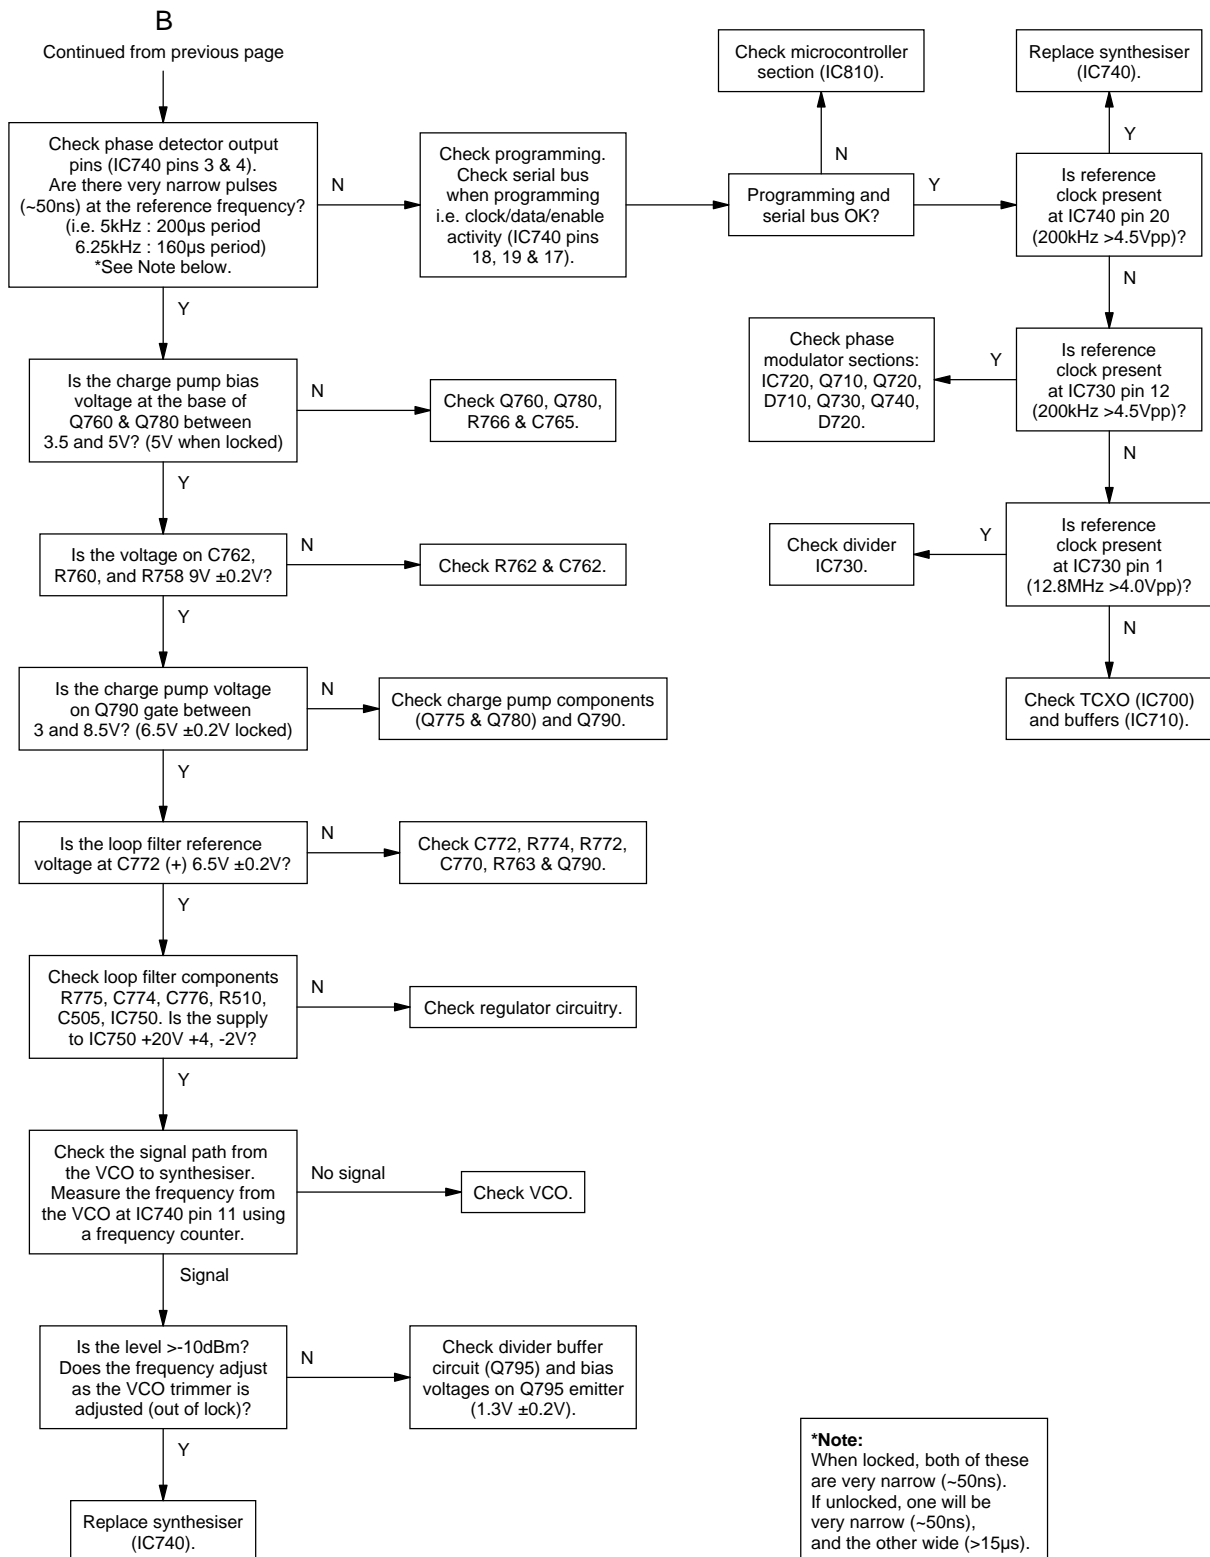


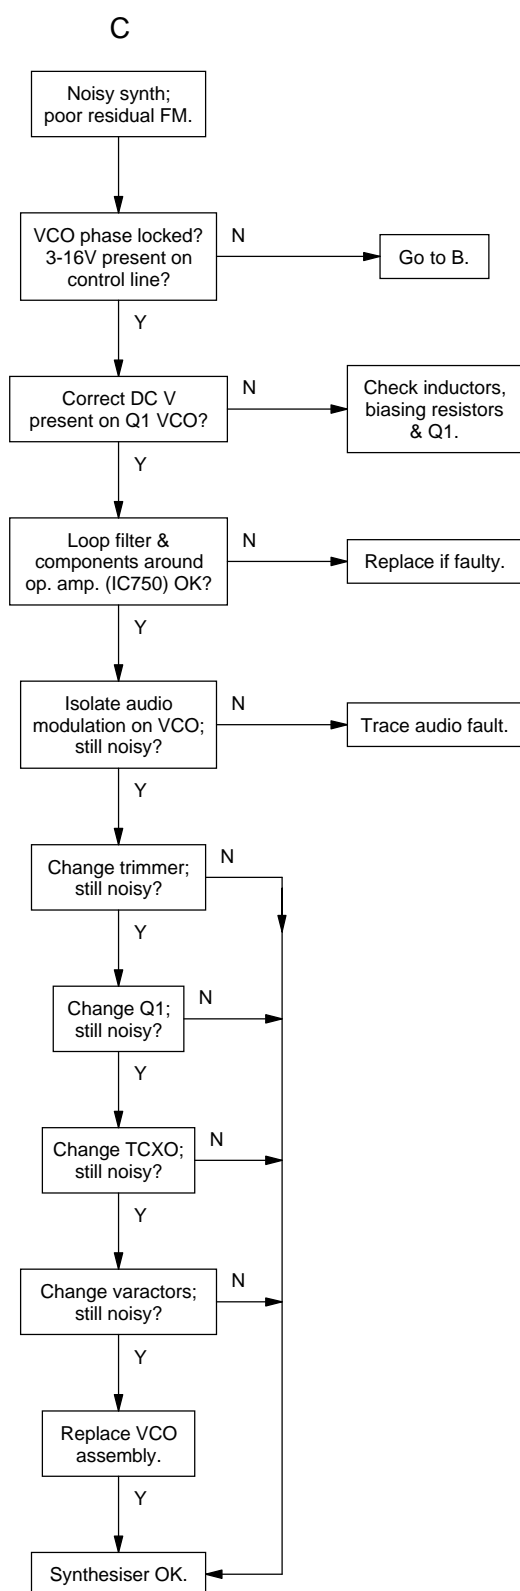


5.7.4 T856 Drive Amplifier

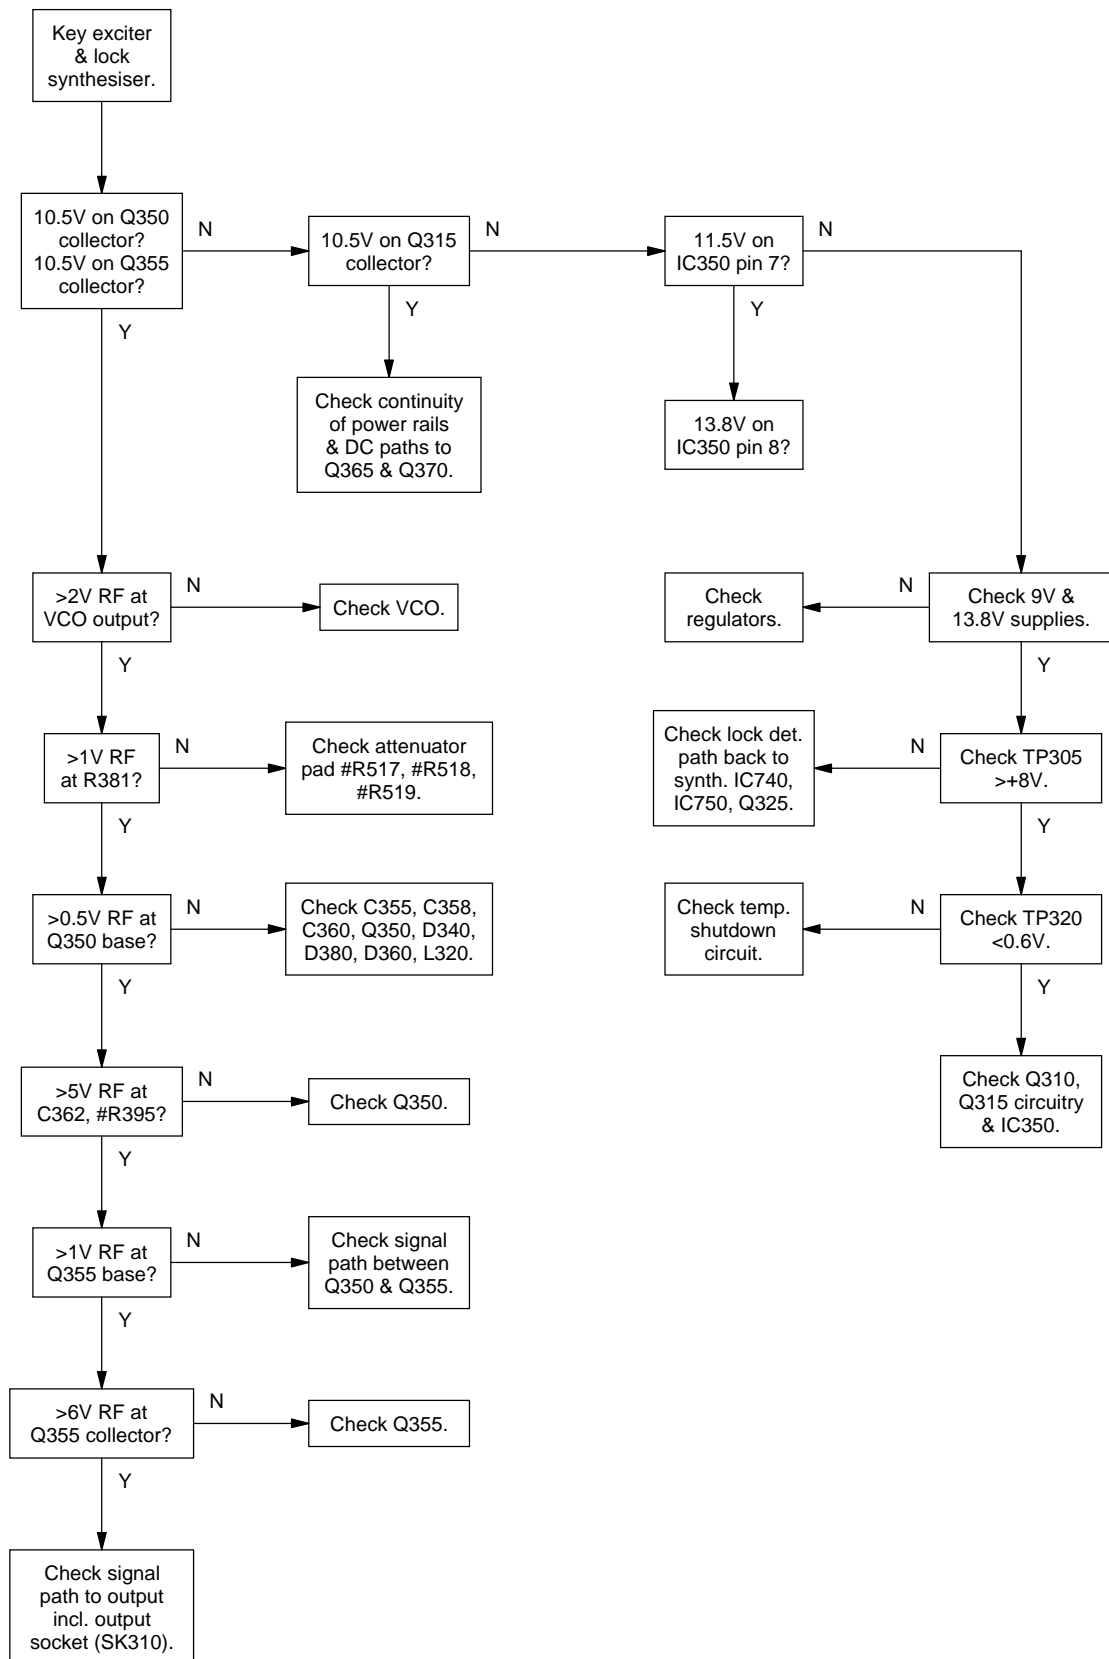


5.7.5 T856 PA & Power Control

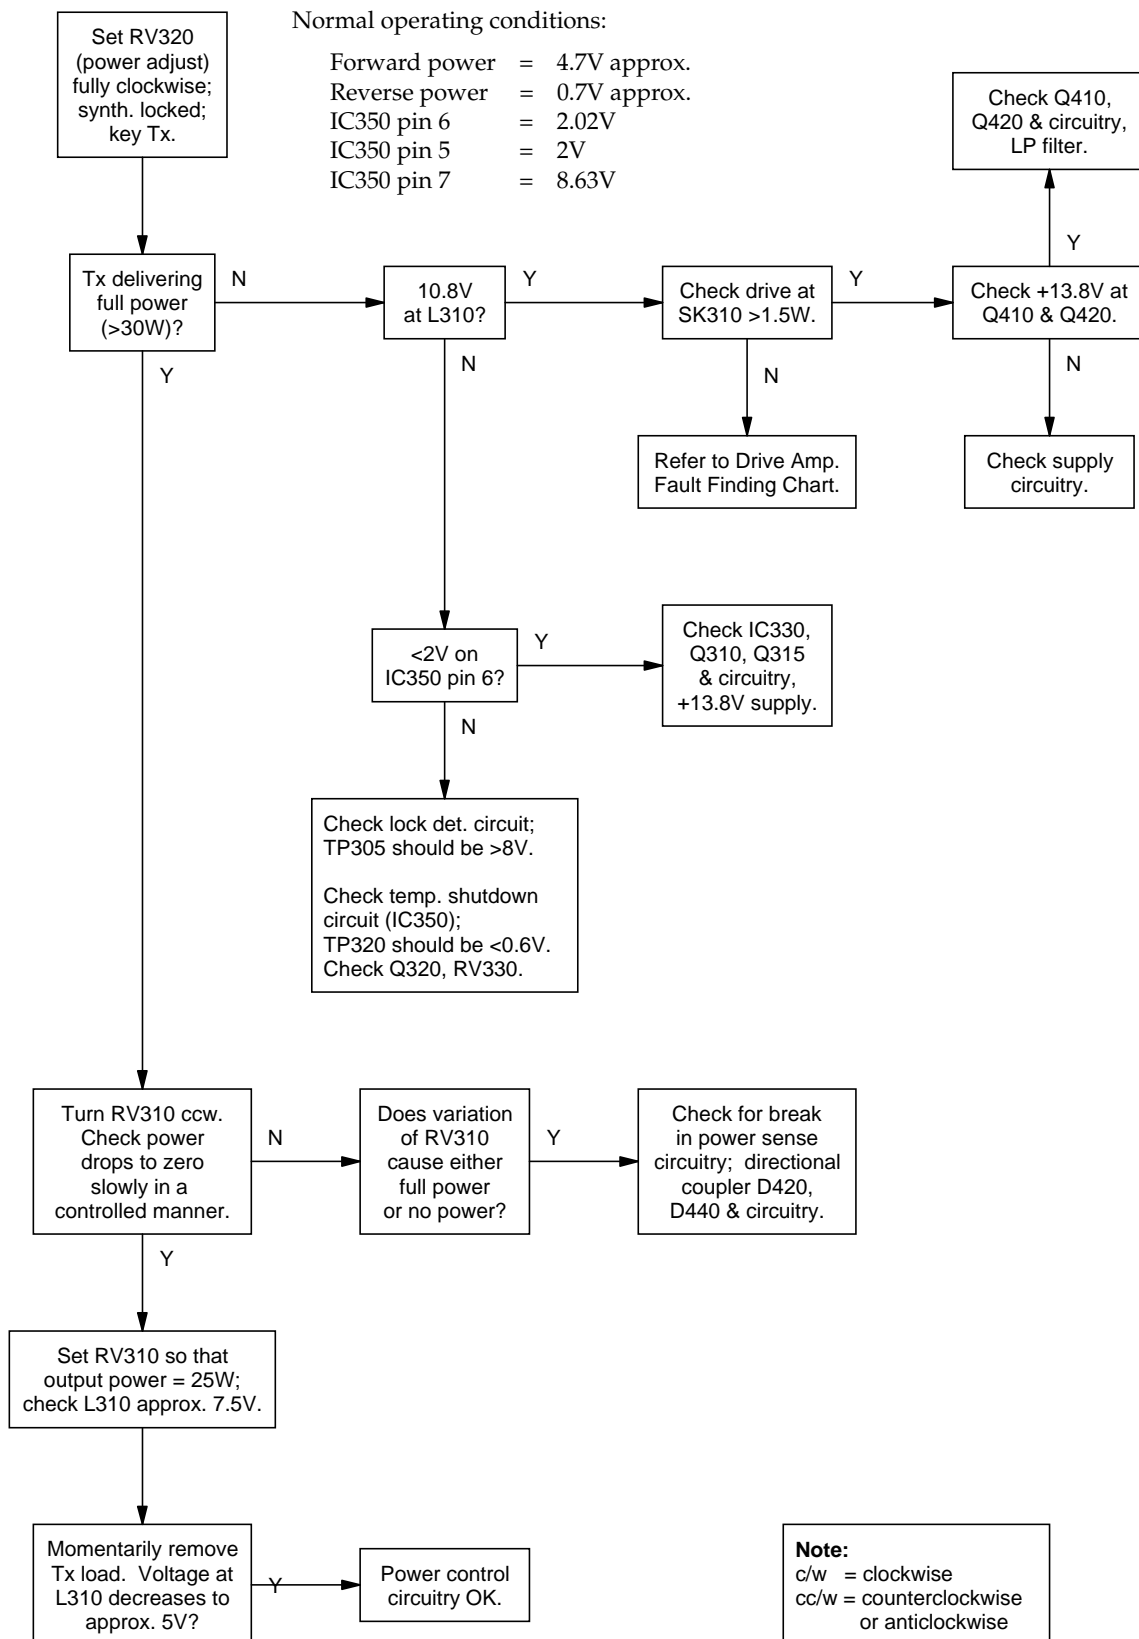

5.7.6 T857 Exciter Drive Amplifier

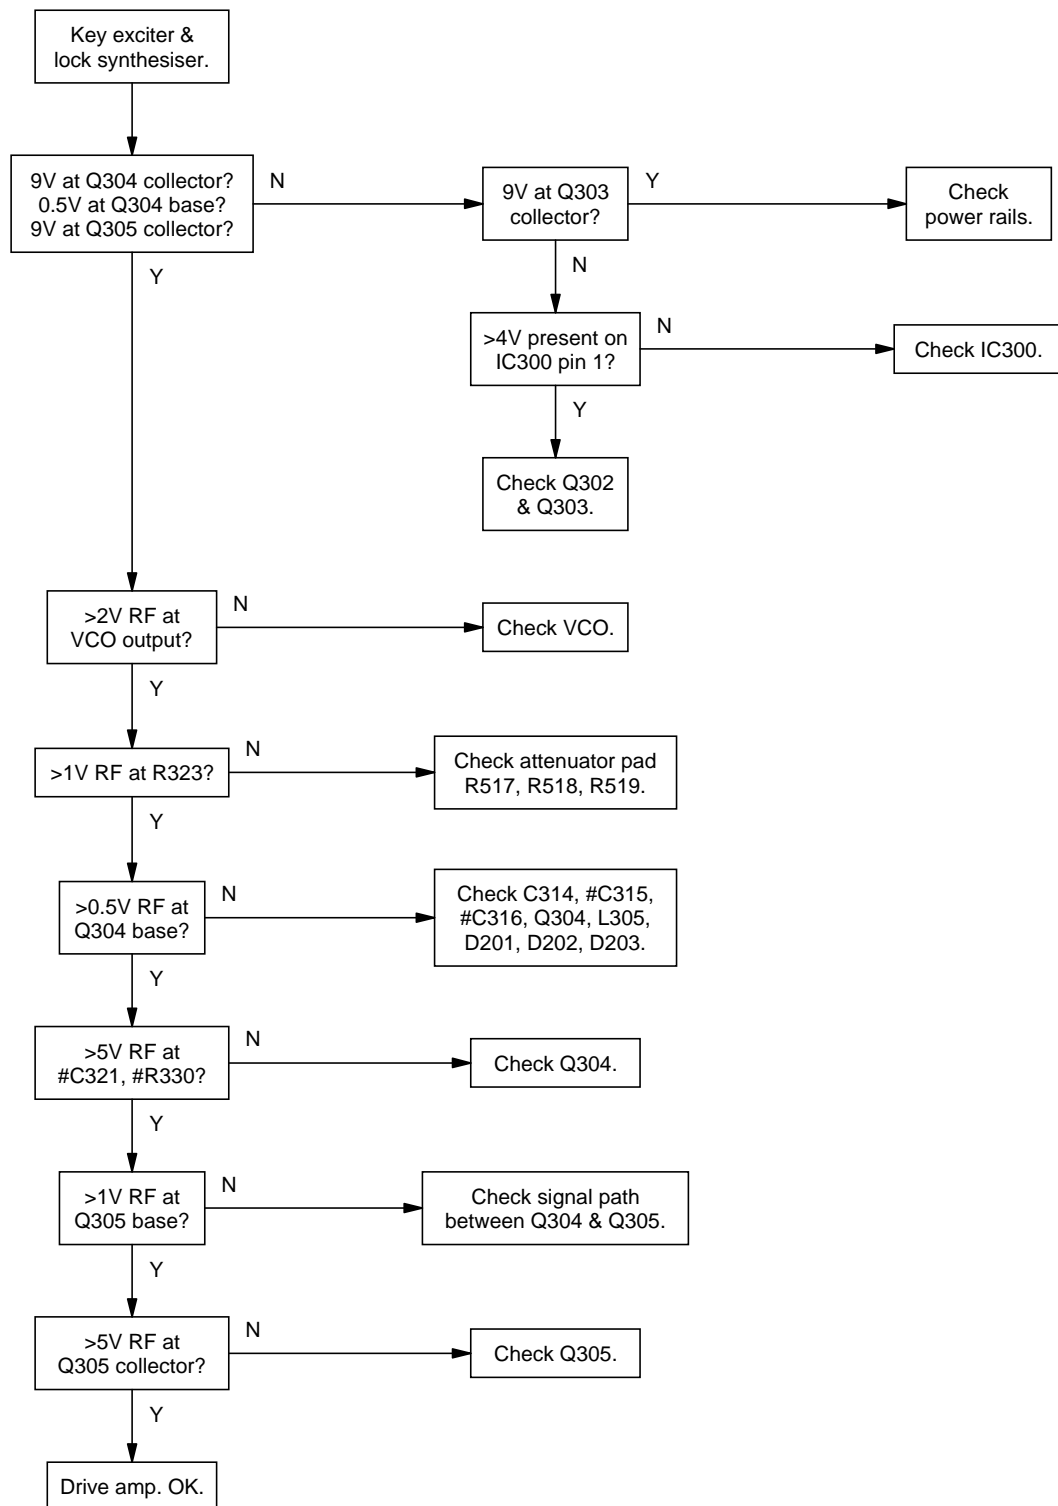

5.7.7 Audio Processor

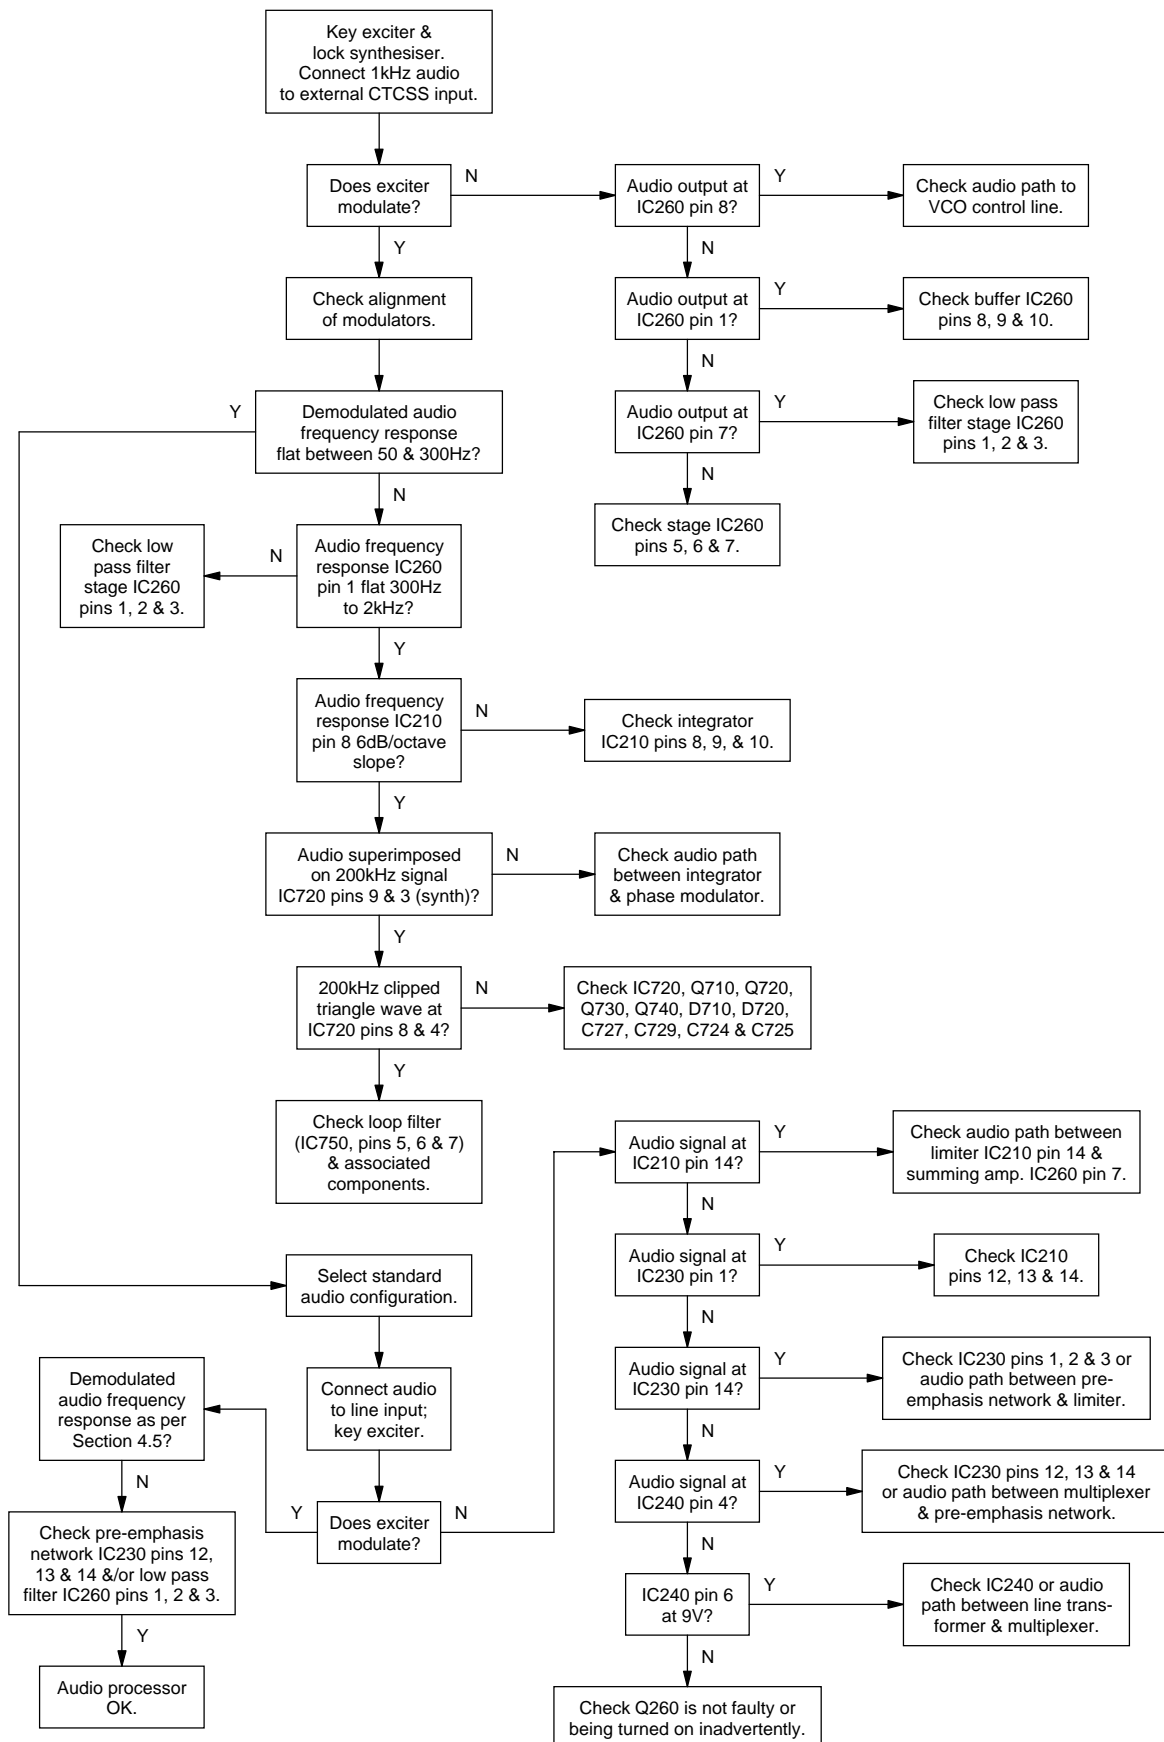

5.8 To Replace The T856 PA Transistors (Q410 & Q420)

**Caution:**

Failure to comply with the following procedure can result in failure of the device due to poor heatsinking, or worse, can endanger the health of the assembler if the beryllium oxide die carrier is smashed during assembly.

**Caution:**

As the location of certain components in the PA is critical to performance, it is important that any components removed or disturbed are refitted in *exactly* the same position.

Before attempting to remove a transistor, measure the distance between the capacitors and transistor body to the nearest 0.5mm (measurement "A" in [Figure 5.2](#)) so that the capacitors can be replaced in *exactly* the same position. These measurements are shown in [Figure 5.2](#) for the 6LFL package, however the same procedure applies for the SOE (stud) package.

**Caution:**

Do not apply too much heat or pressure to the PCB pads and tracks as you may damage them or lift them from the PCB, causing permanent damage to the transmitter.

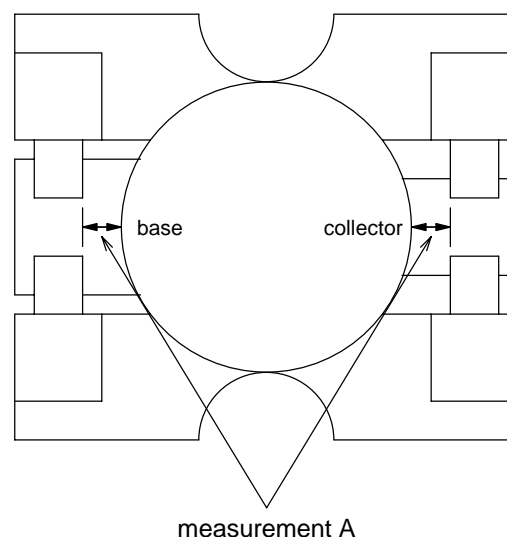


Figure 5.2 Typical Transistor/Capacitor Spacing (Not To Scale)

Desolder and remove the components from around the transistor.

Q420 Only: Desolder and remove the two solder tags.

Desolder the transistor tabs by heating with a soldering iron and lifting away from the PCB with a screwdriver or thin stainless steel spike, then remove the device.

Q410 Only: Unscrew the transistor stud nut and remove the device.

Remove any excess solder from the PCB pads with solder wick.

Trim the tabs of the replacement transistor so that the device sits neatly on the PCB pads provided.

Lightly tin the underside of the transistor tabs. Remove any excess solder to leave a thin, even layer on the tabs.

Apply a small amount of heatsink compound (Dow-Corning 340 or equivalent) to the transistor mounting surface. Sufficient compound should be used to ensure an even film over the entire mounting surface.

Place the transistor on the PCB in the correct orientation and ensure the tabs are flush to the surface.

Q410 Only: Lightly solder one tab to the PCB, then torque down the retaining nut to the correct torque (0.7Nm/6in.lbf.).



Caution: Do not solder all the tabs before torquing down otherwise the device may be broken.

Q420 Only: Refit the solder tags.

Solder all transistor tabs to the PCB.

Replace each component in exactly the same position as noted previously.

6 T856/857 PCB Information



Caution: This equipment contains CMOS devices which are susceptible to damage from static charges. Refer to [Section 1.2](#) in Part A for more information on anti-static procedures when handling these devices.

This section provides the following information on the T856 transmitter and T857 exciter:

- parts lists
- grid reference indexes
- mechanical assembly drawings
- PCB layouts
- test points & options connections drawings
- circuit diagrams.

Section	Title	IPN	Page
6.1	Introduction		6.1.3
6.2	T856 Transmitter PCB	220-01397-01	6.2.1
6.3	T857 Exciter PCB	220-01398-02 220-01398-04	6.3.1 6.3.29

6.1 Introduction

Product Type Identification

You can identify the transmitter or exciter type by checking the product code printed on a label on the rear of the chassis (product codes are explained in [Section 1.3](#) in this Part of the manual, and [Figure 1.1](#) in Part A shows typical labels). You can further verify the product type by checking the placement of an SMD resistor in the table that is screen printed onto the top side of the PCB, similar to the example drawn below. In this example, the resistor indicates that the product was built as a T856-10-XXXX.

<table> <tr><td>■</td><td>■</td><td>856-30</td></tr> <tr><td>■</td><td>■</td><td>856-35</td></tr> <tr><td>■</td><td>■</td><td>856-</td></tr> <tr><td colspan="3">PRODUCT TYPE</td></tr> </table>	■	■	856-30	■	■	856-35	■	■	856-	PRODUCT TYPE			<table> <tr><th colspan="3">PRODUCT TYPE</th></tr> <tr><td>■</td><td>■</td><td>856-10</td></tr> <tr><td>■</td><td>■</td><td>856-13</td></tr> <tr><td>■</td><td>■</td><td>856-15</td></tr> </table>	PRODUCT TYPE			■	■	856-10	■	■	856-13	■	■	856-15	<table> <tr><td>■</td><td>■</td><td>856-20</td></tr> <tr><td>■</td><td>■</td><td>856-23</td></tr> <tr><td>■</td><td>■</td><td>856-25</td></tr> </table>	■	■	856-20	■	■	856-23	■	■	856-25
■	■	856-30																																	
■	■	856-35																																	
■	■	856-																																	
PRODUCT TYPE																																			
PRODUCT TYPE																																			
■	■	856-10																																	
■	■	856-13																																	
■	■	856-15																																	
■	■	856-20																																	
■	■	856-23																																	
■	■	856-25																																	

Note: The only function of this resistor is to indicate the product type. It has no effect on the circuitry or operation of the transmitter or exciter.

PCB Identification

All PCBs are identified by a unique 10 digit “internal part number” (IPN), e.g. 220-01390-02, which is screen printed onto the PCB (usually on the top side), as shown in the example below:



The last 2 digits of this number define the issue status, which starts at 00 and increments through 01, 02, 03, etc. as the PCB is updated. Some issue PCBs never reach full production status and are therefore not included in this manual. A letter following the 10 digit IPN has no relevance in identifying the PCB for service purposes.

Note: It is important that you identify which issue PCB you are working on so that you can refer to the appropriate set of PCB information.

Parts Lists

The 10 digit numbers (000-00000-00) in this Parts List are “internal part numbers” (IPNs). We can process your spare parts orders more efficiently and accurately if you quote the IPN and provide a brief description of the part.

The components listed in this parts list are divided into two main types: those with a circuit reference (e.g. C2, D1, R121, etc.) and those without (miscellaneous and mechanical).

Those with a circuit reference are grouped in alphabetical order and then in numerical order within each group. Each component entry comprises three or four columns, as shown below:

circuit reference - lists components in alphanumeric order

Ref	Var	IPN	Description
C126		015-06100-08	CAP CER 1206 CHIP 100N 10% X7R 50V
C127		020-09220-01	CAP ELECT RADL 220M 16V 10X12.5MM
C128		015-06100-08	CAP CER 1206 CHIP 100N 10% X7R 50V
C129		015-06100-08	CAP CER 1206 CHIP 100N 10% X7R 50V
&C130	10	015-25100-08	CAP CER 0805 CHIP 10N 10% X7R 50V
&C130	15	015-24470-08	CAP CER 0805 CHIP 4N7 10% X7R 50V
&C130	20	015-25100-08	CAP CER 0805 CHIP 10N 10% X7R 50V
&C130	25	015-24470-08	CAP CER 0805 CHIP 4N7 10% X7R 50V
C131		015-24100-08	CAP CER 0805 CHIP 1N 10% X7R 50V
C132		015-24470-08	CAP CER 0805 CHIP 4N7 10% X7R 50V
C133		015-05470-08	CAP CER 1206 CHIP 47N 10% X7R 50V

variant column - indicates that this is a variant component which is fitted only to the product type listed

description - gives a brief description of the component

Internal Part Number - order the component by this number

The miscellaneous and mechanical section lists the variant and common parts in IPN order.

Parts List Amendments

At the front of the parts list is the Parts List Amendments box (an example of which is shown below). This box contains a list of component changes which took place after the parts list and diagrams in this section were compiled. These changes (e.g. value changes, added/deleted components, etc.) are listed by circuit reference in alphanumeric order and supersede the information given in the parts list or diagrams. Components without circuit references are listed in IPN order. The number in brackets at the end of each entry refers to the Tait internal Change Order document.

IPN of new component

Change Order number

Parts List Amendments	
R306	Changed from 180Ω to 560Ω (036-13560-00) to increase sensitivity (71003).

circuit reference or IPN

description of change

Variant Components

A variant component is one that has the same circuit reference but different value or specification in different product types. Where two products share the same PCB, the term “variant” is also used to describe components unplaced in one product. Variant components have a character prefix, such as “&”, “=” or “#”, before the circuit reference (e.g. &R100).

The table below explains the variant prefixes used in T800 Series II products:

If the variant prefix is. . .	the component will. . .
&	change according to channel spacing
=	change according to frequency stability
#	change according to frequency range
%	change or be placed/unplaced for special applications
*	be unplaced in one product (where two products share the same PCB)

Grid Reference Index

This section contains a component grid reference index to help you find components and labelled pads on the PCB layouts and circuit diagrams. This index lists the components and pads in alphanumeric order, along with the appropriate alphanumeric grid references, as shown below:

Device	PCB	Circuit
C126	2:A6	2-R7
C127	1:A8	2-P4
C128	2:B7	2-P2
C129	2:C12	2-E3
&C130	2:D8	2-B8
C131	2:C9	2-H6
C132	2:D8	2-B8
C133	2:D6	2-E1

components listed in alphanumeric order

PCB layout reference
circuit diagram reference

component location on the sheet

sheet number


component location on the layer

layer number -
1 = top side layer
2 = bottom side layer

Using CAD Circuit Diagrams

Reading a CAD circuit diagram is similar to reading a road map, in that both have an alphanumeric border. The circuit diagrams in this manual use letters to represent the horizontal axis, and numbers for the vertical axis. These circuit diagram “grid references” are useful in following a circuit that is spread over two or more sheets.

When a line representing part of the circuitry is discontinued, a reference will be given at the end of the line to indicate where the rest of the circuitry is located, as shown below. The first digit refers to the sheet number and the last two characters refer to the location on that sheet of the continuation of the circuit (e.g. 1R3).

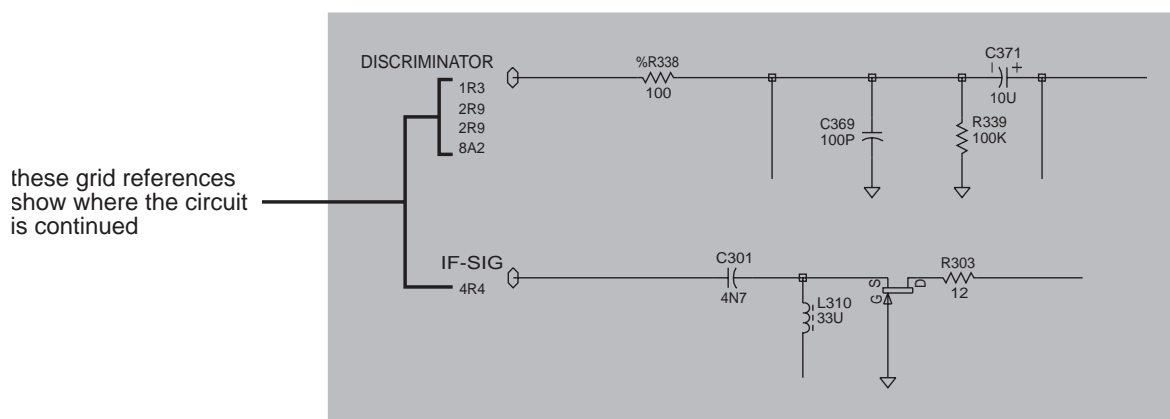

6.2 T856 Transmitter PCB

This section contains the following information.

IPN	Section	Page
220-01397-01	Parts List	6.2.3
	Mechanical & Miscellaneous Parts	6.2.10
	Mechanical Assembly	6.2.11
	Grid Reference Index	6.2.13
	PCB Layout - Top Side	6.2.17
	PCB Layout - Bottom Side	6.2.18
	Test Points & Options Connections - Top Side	6.2.19
	Test Points & Options Connections - Bottom Side	6.2.20
	Transmitter Overview Diagram	6.2.21
	Audio Processor Circuit Diagram	6.2.22
	Exciter Circuit Diagram	6.2.23
	PA Circuit Diagram	6.2.24
	VCO Section Circuit Diagram	6.2.25
	Regulators Circuit Diagram	6.2.26
	Synthesiser Circuit Diagram	6.2.27
	Microcontroller Circuit Diagram	6.2.28
	Harmonic Filter Circuit Diagram	6.2.29

T856 Parts List (IPN 220-01397-01)

How To Use This Parts List

The components listed in this parts list are divided into two main types: those with a circuit reference (e.g. C2, D1, R121, etc.) and those without (miscellaneous and mechanical).

Those with a circuit reference are grouped in alphabetical order and then in numerical order within each group. Each component entry comprises three or four columns: the circuit reference, variant (if applicable), IPN and description. A number in the variant column indicates that this is a variant component which is fitted only to the product type listed. Static sensitive devices are indicated by an (S) at the start of the description column.

The miscellaneous and mechanical section lists the variant and common parts in IPN order. Where possible, a number in the legend column indicates their position in the mechanical assembly drawing.

The Parts List Amendments box below lists component changes that took place after the parts list and diagrams in this section were compiled. These changes (e.g. value changes, added/deleted components, etc.) are listed by circuit reference in alphanumeric order and supersede the information given in the parts list or diagrams. Components without circuit references are listed in IPN order.

Parts List Amendments

Capacitor IPN Change	The IPN of the 8p2 chip capacitors used in the T856 has been changed from 015-21820-01 to 015-21820-02. The components themselves have not changed (780047/48/49/50).		
#C930, #C960	400-440MHz (-10, -13 & -15): deleted to improve output power (710296 and 710359).		
D111	Changed from MR750 (IPN 001-00011-60) to MR2520L (IPN 001-00012-90) to provide overvoltage transient suppression (750087/88/89/90/91/92).		
=IC700	-16, -26, -36: changed to -30/+70°C VCTCXO (IPN 539-00010-45) to meet FCC Type Approval (710893).		
IC710	Changed from 74HCV04 (IPN 002-74910-04) to 74HC04 (IPN 002-74900-04) to increase the gain of the TCXO buffer (710312).		
L345	-10 type only: rewired and placed on its side to improve output power (710296).		
L355	400-440MHz (-10, -13 & -15): changed from 1.5T/2.5mm coil (052-08125-15) to 1.5T/3.5mm coil (052-08135-15) to regulate output power; circuit reference also changed to #L355 (710284).		
Q550	Changed from BCW60 (IPN 000-10008-48) to BC817-25 (IPN 000-10008-17) as BCW60 is underrated (711093).		
R713	Changed from 22Ω (IPN 036-12220-00) to 0Ω (IPN 036-10000-00) to improve hum & noise performance (710837/839/840/841).		
New Product Types	The following component changes apply to the T856-16-0000/26-0000/36-0000 Product Types:		
	&C269	changed to 4p7 (IPN 015-21470-01)	
	C271	changed to 56p (IPN 015-22560-01) - circuit reference changed to &C271	
	C289	changed to 68n (IPN 015-25680-08) - circuit reference changed to &C289	
	R290	changed to 680Ω (IPN 036-13680-00) - circuit reference changed to &R290.	
070-02001-00	Red front panel LED: replaced by 008-00014-79 (710928).		
070-02002-00	Green front panel LED: replaced by 008-00014-80 (710928).		
303-11169-03	T800 chassis: replaced by 303-11169-04		New chassis and lid tooling introduced, incorporating mechanical improvements and better RF shielding (750027, 750028 & 750029). Note that the new lids should be used only with the new chassis.
312-01052-01	T800 top lid: replaced by 312-01052-02		
312-01053-01	T800 bottom lid: replaced by 312-01053-02		
319-01173-00	D-range shield: deleted		no longer required with new chassis and lids (710427).
319-01174-00	N-type connector shield: deleted		
349-00020-36	The two M3x8 Torx screws which secure the module into the rack frame have been replaced by M3x8 Pozidriv screws (IPN 349-00020-55) (750101/2/3/5/6).		
Chassis Screws	The Pozidriv screws securing the rear panel connectors and cover plate were replaced by Torx head screws when the shields were deleted.		

Ref	Var	IPN	Description	Ref	Var	IPN	Description
Note: %D205 and %D210 are optional level limiting diodes for special applications. =R705 (47 ohm) and =SK710 are fitted in place of =IC700 when an external frequency reference is used. These two components are supplied with the auxiliary D-range kits (T800-06-0000 & T800-06-0001).				C328		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C329		020-07470-04	CAP ELE RA 4M7 25V 20%8X13 SOL
				C330A		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C330B		016-08100-01	CAP EL 6X4 10M 20% 16V
				C331		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C332		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C333		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C334		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C335		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C336		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
				C337		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
				C338		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C339		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C340		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C341		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C342		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C343		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C344		015-25470-08	CAP CER 0805 47N 10% X7R 50V
				C345		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C346		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C347		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C348		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C349		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C350A		015-25100-08	CAP CER 0805 10N 10% X7R 50V
				C350B		016-08100-01	CAP EL 6X4 10M 20% 16V
				C351		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C352		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C353		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C354		015-22220-01	CAP CER 0805 22P 5% NPO 50V
				C355		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C356		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C358		015-22120-01	CAP CER 0805 12P 5% NPO 50V
				C360		015-22330-01	CAP CER 0805 33P 5% NPO 50V
				C362		015-22100-01	CAP CER 0805 10P+/-1/2P NPO 50V
				C364		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C366		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C368		015-22120-01	CAP CER 0805 12P 5% NPO 50V
				C370A		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C370B		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C370C		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
				C371		015-25100-08	CAP CER 0805 10N 10% X7R 50V
				C372		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
				C373		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C380		015-22330-01	CAP CER 0805 33P 5% NPO 50V
				#C382	10	015-21390-01	CAP CER 0805 3P9+/-1/4P NPO 50V
				#C382	13	015-21390-01	CAP CER 0805 3P9+/-1/4P NPO 50V
				#C382	15	015-21390-01	CAP CER 0805 3P9+/-1/4P NPO 50V
				#C382	20	015-21220-01	CAP CER 0805 2P2+/-1/4P NPO 50V
				#C382	23	015-21220-01	CAP CER 0805 2P2+/-1/4P NPO 50V
				#C382	25	015-21220-01	CAP CER 0805 2P2+/-1/4P NPO 50V
				#C382	30	015-21220-01	CAP CER 0805 2P2+/-1/4P NPO 50V
				#C382	35	015-21220-01	CAP CER 0805 2P2+/-1/4P NPO 50V
				C383		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				#C384	10	015-22120-01	CAP CER 0805 12P 5% NPO 50V
				#C384	13	015-22120-01	CAP CER 0805 12P 5% NPO 50V
				#C384	15	015-22120-01	CAP CER 0805 12P 5% NPO 50V
				#C384	20	015-21680-01	CAP CER 0805 6P8+/-1/4P NPO 50V
				#C384	23	015-21680-01	CAP CER 0805 6P8+/-1/4P NPO 50V
				#C384	25	015-21680-01	CAP CER 0805 6P8+/-1/4P NPO 50V
				#C384	30	015-21560-01	CAP CER 0805 5P6+/-1/4P NPO 50V
				#C384	35	015-21560-01	CAP CER 0805 5P6+/-1/4P NPO 50V
				C385		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C405		015-22120-01	CAP CER 0805 12P 5% NPO 50V
				#C410	10	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C410	13	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C410	15	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C410	20	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C410	23	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C410	25	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C410	30	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C410	35	029-02330-02	CAP MICA 5 CASE 33P 5%
				C415		029-02330-02	CAP MICA 5 CASE 33P 5%
				C419		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C420		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C421		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C430		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C435		016-08470-01	CAP EL SMD 6*4 47U 16V
				C438		029-02680-02	CAP MICA 5 CASE 68P 5%
				#C440	10	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C440	13	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C440	15	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C440	20	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C440	23	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C440	25	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C440	30	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C440	35	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C445	10	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C445	13	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C445	15	029-02390-02	CAP MICA 5 CASE 39P 5%
				#C445	20	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C445	23	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C445	25	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C445	30	029-02330-02	CAP MICA 5 CASE 33P 5%
				#C445	35	029-02330-02	CAP MICA 5 CASE 33P 5%
				C450		015-03100-02	CAP CER HIQ1210 100P 5%NPO200V
				C455		020-07470-02	CAP ELE RAD 4M7 50V 5X11MM
				#C460	10	029-02220-02	CAP MICA 5 CASE 22P 5%
				#C460	13	029-02220-02	CAP MICA 5 CASE 22P 5%

Ref	Var	IPN	Description	Ref	Var	IPN	Description
#C460	15	029-02220-02	CAP MICA 5 CASE 22P 5%	C741B		015-25100-08	CAP CER 0805 10N 10% X7R 50V
#C460	20	029-02270-02	CAP MICA 5 CASE 27P 5%	C742A		015-06100-08	CAP CER 1206 100N 10% X7R 50V
#C460	23	029-02270-02	CAP MICA 5 CASE 27P 5%	C742B		015-25100-08	CAP CER 0805 10N 10% X7R 50V
#C460	25	029-02270-02	CAP MICA 5 CASE 27P 5%	C743		015-22470-01	CAP CER 0805 47N 5% NPO 50V
#C460	30	029-02220-02	CAP MICA 5 CASE 22P 5%	C745		015-23120-01	CAP CER 0805 120P 5% NPO 50V
#C460	35	029-02220-02	CAP MICA 5 CASE 22P 5%	C750A		025-08100-03	CAP 10M 35V 20% TANT 5MM L/S
#C465	10	029-02220-02	CAP MICA 5 CASE 22P 5%	C750B		015-24100-08	CAP CER 0805 1N 10% X7R 50V
#C465	13	029-02220-02	CAP MICA 5 CASE 22P 5%	C757		015-25220-08	CAP CER 0805 22N 10% X7R 50V
#C465	15	029-02220-02	CAP MICA 5 CASE 22P 5%	C759		015-25470-08	CAP CER 0805 47N 10% X7R 50V
#C465	20	029-02270-02	CAP MICA 5 CASE 27P 5%	C761		015-25100-08	CAP CER 0805 10N 10% X7R 50V
#C465	23	029-02270-02	CAP MICA 5 CASE 27P 5%	C762		014-08220-01	(L)CAP TANT 22UF10V276MSER
#C465	25	029-02270-02	CAP MICA 5 CASE 27P 5%	C763		015-23150-01	CAP CER 0805 150P 5% NPO 50V
#C465	30	029-02220-02	CAP MICA 5 CASE 22P 5%	C764		015-25100-08	CAP CER 0805 10N 10% X7R 50V
#C465	35	029-02220-02	CAP MICA 5 CASE 22P 5%	C765		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C470		015-03100-03	CAP CER 100P 5% NPO500V GRH111	C766		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
#C480	10		NOT PLACED	C767		015-24100-08	CAP CER 0805 1N 10% X7R 50V
#C480	13		NOT PLACED	C768		015-23150-01	CAP CER 0805 150P 5% NPO 50V
#C480	15		NOT PLACED	C769		015-24100-08	CAP CER 0805 1N 10% X7R 50V
#C480	20	015-01470-02	CAP CER HIQ1210 4P7 5% NPO200V	C770		014-08220-01	(L)CAP TANT 22UF10V276MSER
#C480	23	015-01470-02	CAP CER HIQ1210 4P7 5% NPO200V	C772		014-08220-01	(L)CAP TANT 22UF10V276MSER
#C480	25	015-01470-02	CAP CER HIQ1210 4P7 5% NPO200V	C774		022-06100-16	CAP METAL POLY 100N +/-10% 100V
#C480	30		NOT PLACED	C776		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
#C480	35		NOT PLACED	C782		015-23120-01	CAP CER 0805 120P 5% NPO 50V
C481		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C784		015-23120-01	CAP CER 0805 120P 5% NPO 50V
C485		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C786		015-06100-08	CAP CER 1206 100N 10% X7R 50V
C490		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C788		015-23120-01	CAP CER 0805 120P 5% NPO 50V
C493		015-03100-03	CAP CER 100P 5% NPO500V GRH111	C790		015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C496		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C792		015-23120-01	CAP CER 0805 120P 5% NPO 50V
C499		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C810		015-25470-08	CAP CER 0805 47N 10% X7R 50V
C501		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C812		015-23100-01	CAP CER 0805 100P 5% NPO 50V
C502		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C813		015-24100-08	CAP CER 0805 1N 10% X7R 50V
C503		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	C822		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
C504		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C823		015-25220-08	CAP CER 0805 22N 10% X7R 50V
C505		015-25470-08	CAP CER 0805 47N 10% X7R 50V	C824		015-25470-08	CAP CER 0805 47N 10% X7R 50V
C507		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C826		015-23220-01	CAP CER 0805 220P 5% NPO 50V
C508		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C827		015-22330-01	CAP CER 0805 33P 5% NPO 50V
C509		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C828		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C510		015-25470-08	CAP CER 0805 47N 10% X7R 50V	C830		015-25470-08	CAP CER 0805 47N 10% X7R 50V
C512		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C838		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM
C513		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C841		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM
C514		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C844		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C516		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#C900	10	015-01560-06	CAP CER 1210 5P6 NPO500VGRM42
C517		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C900	13	015-01560-06	CAP CER 1210 5P6 NPO500VGRM42
C519		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C900	15	015-01560-06	CAP CER 1210 5P6 NPO500VGRM42
C525		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C900	20	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C530		014-08220-01	(L)CAP TANT 22UF10V276MSER	#C900	23	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C535		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C900	25	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C537		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C900	30	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C605		015-23120-01	CAP CER 0805 120P 5% NPO 50V	#C900	35	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C610A		015-25100-08	CAP CER 0805 10N 10% X7R 50V	C910		015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C610B		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM	#C920	10	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C611A		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM	#C920	13	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C611B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#C920	15	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C620		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C920	20	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C621		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C920	23	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C623		015-23120-01	CAP CER 0805 120P 5% NPO 50V	#C920	25	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C625		020-09470-07	CAPEL470M16V20%V 8*20 3.5L.ESR	#C920	30	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C626		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	#C920	35	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C628		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C930	10	015-21100-01	CAP CER 0805 1PO+-1/4P NPO 50V
C630		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C930	13	015-21100-01	CAP CER 0805 1PO+-1/4P NPO 50V
C631A		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C930	15	015-21100-01	CAP CER 0805 1PO+-1/4P NPO 50V
C634		014-08100-00	CAP TANT CHIP 10M 16VW +20%	#C930	20		NOT PLACED
C636		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C930	23		NOT PLACED
C638		015-23120-01	CAP CER 0805 120P 5% NPO 50V	#C930	25		NOT PLACED
C640		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C930	30		NOT PLACED
C655		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C930	35		NOT PLACED
C660		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C940		015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C665		020-58100-03	CAP ELE AI RDL 10M 50V 5X11MM	#C950	10	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C670		025-07330-01	CAP TANT BEAD 3M3 35V	#C950	13	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C673		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	#C950	15	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C677		020-07100-02	CAP ELE RA 1M 50V 5X11MM	#C950	20	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C681		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C950	23	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C684		014-08100-00	CAP TANT CHIP 10M 16VW +20%	#C950	25	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C687		015-23120-01	CAP CER 0805 120P 5% NPO 50V	#C950	30	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C690		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C950	35	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C693		014-08100-00	CAP TANT CHIP 10M 16VW +20%	#C960	10	015-21100-01	CAP CER 0805 1PO+-1/4P NPO 50V
C700		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C960	13	015-21100-01	CAP CER 0805 1PO+-1/4P NPO 50V
C701		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C960	15	015-21100-01	CAP CER 0805 1PO+-1/4P NPO 50V
C703		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C960	20		NOT PLACED
C705		015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V	#C960	23		NOT PLACED
C706		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C960	25		NOT PLACED
C708		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	#C960	30		NOT PLACED
C709		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C960	35		NOT PLACED
C710		015-25100-08	CAP CER 0805 10N 10% X7R 50V	C970		015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C712		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C980	10	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C720		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C980	13	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C722		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C980	15	015-01470-06	CAP CER 1210 4P7 NPO500VGRM42
C724		014-08220-01	(L)CAP TANT 22UF10V276MSER	#C980	20	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C725		014-08220-01	(L)CAP TANT 22UF10V276MSER	#C980	23	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C726		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#C980	25	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C727		015-23220-01	CAP CER 0805 220P 5% NPO 50V	#C980	30	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C729		015-23220-01	CAP CER 0805 220P 5% NPO 50V	#C980	35	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
%C733		015-23470-08	CAP CER 0805 470P 10% X7R 50V	#C990	10	015-01560-06	CAP CER 1210 5P6 NPO500VGRM42
C735		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C990	13	015-01560-06	CAP CER 1210 5P6 NPO500VGRM42
C736		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C990	15	015-01560-06	CAP CER 1210 5P6 NPO500VGRM42
C740A		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C990	20	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C740B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#C990	23	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42
C741A		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	#C990	25	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42

Ref	Var	IPN	Description	Ref	Var	IPN	Description
#C990	30	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42	L920		052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#C990	35	015-01390-06	CAP CER 1210 3P9 NPO500VGRM42	#L930	10	052-08155-15	COIL A/W 1.5T/5.5MM HOR 0.8MM
				#L930	13	052-08155-15	COIL A/W 1.5T/5.5MM HOR 0.8MM
#CV475	10	028-02160-03	CAP TRM 2/16P	#L930	15	052-08155-15	COIL A/W 1.5T/5.5MM HOR 0.8MM
#CV475	13	028-02160-03	CAP TRM 2/16P	#L930	20	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#CV475	15	028-02160-03	CAP TRM 2/16P	#L930	23	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#CV475	20	028-02100-03	CAP TRM 2/10P	#L930	25	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#CV475	23	028-02100-03	CAP TRM 2/10P	#L930	30	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#CV475	25	028-02100-03	CAP TRM 2/10P	#L930	35	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#CV475	30	028-02100-03	CAP TRM 2/10P	#L940	10	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
#CV475	35	028-02100-03	CAP TRM 2/10P	#L940	13	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
				#L940	15	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM
D111		001-00011-60	S) DIODE SR2607 -- USE MR750	#L940	20	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM
D220		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	#L940	23	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM
D230		001-00010-40	S) DIODE ZENER 33V 1.3W	#L940	25	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM
D240		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23	#L940	30	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM
D250		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23	#L940	35	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM
D260		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23				
D270		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	PL205		240-00020-67	HEADER 6W 2X3 PCB MTG STD
D340		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23	PL210		240-00020-67	HEADER 6W 2X3 PCB MTG STD
D360		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23	PL215		240-00020-44	HEADER 10W X2R PCB MTG 5*2
D380		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23	PL220		240-00020-67	HEADER 6W 2X3 PCB MTG STD
D420		001-00013-45	S) DIODE SCHTTKY 1SS97/2				
D440		001-00013-45	S) DIODE SCHTTKY 1SS97/2	Q210		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D510		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q220		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
D610		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q230		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D620		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q240		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D630		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q250		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
D635		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q260		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D640		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q270		000-00011-91	S) XSTR BD139 NPN AF PWR T0126
D710		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q310		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
D720		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q315		000-00012-15	S) XSTR BD234 PNP AF PWR T0126
D730		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q320		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D740		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q325		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D810		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q330		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
				Q335		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
IC210		002-10003-24	S) IC SMD 324 4X O-AMP SO14	Q340		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
IC220		002-10126-70	S) IC SMD DS1267S10K 2XDIG POT	Q345		000-10008-07	S) XSTR SMD BCW60 NPN SOT23 AF
IC230		002-10003-24	S) IC SMD 324 4X O-AMP SO14	Q350		000-00005-55	S) XSTR MRF555 NPN RF L/PWR
IC240		002-10040-53	S)MC14053B SMD BREAK B4 MAKE	Q355		000-00032-56	S) XSTR MRF630 NPN T039 UHF 3W
IC250		002-00020-50	S) IC 4N25A OPTOCOUPLER	Q410		000-00022-75	S) XSTR SD1433 NPN S-MTG 10W
IC260		002-10003-24	S) IC SMD 324 4X O-AMP SO14	Q420		000-00022-80	S) XSTR SD1488 NPN 6LFL 40W
IC330		002-10003-58	S) IC SMD LM358 DUAL O-AMP	Q505		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
IC350		002-10003-58	S) IC SMD LM358 DUAL O-AMP	Q510		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
IC370		002-12951-00	IC SMD LP2951CM ADJ VLTGE REG	Q520		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
IC610		002-00014-58	S) IC 78L05 5V 100MA REG TO92	Q530		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
IC630		002-00014-62	S) IC 317L 100MA REG 3TER TO92	Q540		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
IC640		002-10003-58	S) IC SMD LM358 DUAL O-AMP	Q550		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
IC650		002-10012-32	SMD DS1232LPS-2 LP RESET&W-DOG	Q610		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
=IC700		539-00010-50	TCXO 12.8MHZ +-1PPM -20 +70C	Q620		000-00012-15	S) XSTR BD234 PNP AF PWR T0126
IC710		002-74900-04	S) IC SMD 74HC04D 6X INV BUFFD	Q630		000-50011-30	S) XSTR AI BC557B PNP T092 AF
IC720		002-74910-04	S) IC SMD 74HC04 6X INV	Q660		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
IC730		002-10045-20	S) IC SMD 74HC4520T 2XCTR 4BIT	Q670		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
IC740		002-14519-10	S) IC MC145191F SMD SYNTH	Q710		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
IC750		002-10330-78	S) IC MC33078D 2X AMP LO NOISE	Q720		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
IC810		002-08951-20	S) IC AT89C51 PLCC44 MIC 12MHZ	Q730		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
IC820		002-12416-00	S)IC SMD AT24C16N-10SC EEPROM	Q740		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
IC830		002-10003-24	S) IC SMD 324 4X O-AMP SO14	Q750		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
				Q760		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
L302		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	Q770		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
L303		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	Q775		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
L304		056-10330-02	(L) IND SMD 330NH	Q780		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
L305		065-00010-04	BEAD FERR F8 4X2X5MM	Q785		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
L310		065-00010-04	BEAD FERR F8 4X2X5MM	Q790		000-10003-12	S) XSTR SMD BFR31 N JFET SOT23
L315		052-08130-65	COIL A/W 6.5T/3.0MM HOR 0.8MM	Q795		000-10057-10	S) XSTR SMD BR571 NPN SOT23
L320		056-10330-02	(L) IND SMD 330NH	Q810		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
L333		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	Q820		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
L334		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	Q830		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
L335		052-08130-25	COIL A/W 2.5T/3.0MM HOR 0.8MM	Q840		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
L345		065-00010-01	BEAD FERR 3B 6 HOLE	Q850		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
L355		052-08125-15	COIL A/W 1.5T/2.5MM HOR 0.8MM	Q860		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
L405		052-08125-15	COIL A/W 1.5T/2.5MM HOR 0.8MM				
L410		052-08160-15	COIL A/W 1.5T/6.0MM HOR 0.8MM	R160		036-12100-00	RES M/F 0805 10E 5%
L415		065-00010-04	BEAD FERR F8 4X2X5MM	R201		036-13560-00	RES M/F 0805 560E 5%
L420		065-00010-04	BEAD FERR F8 4X2X5MM	R202		036-14100-00	RES M/F 0805 1K 5%
L425		056-00021-04	IND FXD 330NH AX	R204		036-14220-00	RES M/F 0805 2K2 5%
L430		065-00010-04	BEAD FERR F8 4X2X5MM	R205		036-13220-00	RES M/F 0805 220E 5%
L435		052-08160-15	COIL A/W 1.5T/6.0MM HOR 0.8MM	R206		036-14100-00	RES M/F 0805 1K 5%
L445		052-08130-35	COIL A/W 3.5T/3.0MM HOR 0.8MM	R207		036-14390-00	RES M/F 0805 3K9 5%
L450		065-00010-04	BEAD FERR F8 4X2X5MM	R208		036-13560-00	RES M/F 0805 560E 5%
L460		065-00010-04	BEAD FERR F8 4X2X5MM	R209		036-15100-00	RES M/F 0805 10K 5%
L465		051-00005-53	COIL TAIT NO553 A/W 10MM LINK	R210		036-14220-00	RES M/F 0805 2K2 5%
L475		051-00005-56	COIL NO556 13MM FRMD COP STRP	R212		036-16100-00	RES M/F 0805 100K 5%
L480		056-10330-02	(L) IND SMD 330NH	R213		036-15100-00	RES M/F 0805 10K 5%
L481		056-10330-02	(L) IND SMD 330NH	R214		036-14820-00	RES M/F 0805 8K2 5%
L485		056-10330-02	(L) IND SMD 330NH	R215		036-16100-00	RES M/F 0805 100K 5%
L520		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	R216		036-16100-00	RES M/F 0805 100K 5%
L610		056-00021-04	IND FXD 330NH AX	R217		036-14100-00	RES M/F 0805 1K 5%
L620		065-00010-04	BEAD FERR F8 4X2X5MM	R218		036-16150-00	RES M/F 0805 150K 5%
L750		052-08125-15	COIL A/W 1.5T/2.5MM HOR 0.8MM	R219		036-14220-00	RES M/F 0805 2K2 5%
#L910	10	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM	R221		036-14150-00	RES M/F 0805 1K5 5%
#L910	13	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM	R223		036-17100-00	RES M/F 0805 1M 5%
#L910	15	052-08150-15	COIL A/W 1.5T/5.0MM HOR 0.8MM	R224		036-14680-00	RES M/F 0805 6K8 5%
#L910	20	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM	R225		036-17100-00	RES M/F 0805 1M 5%
#L910	23	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM	R226		036-15100-00	RES M/F 0805 10K 5%
#L910	25	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM	R227		036-14220-00	RES M/F 0805 2K2 5%
#L910	30	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM	R229		036-16470-00	RES M/F 0805 470K 5%
#L910	35	052-08145-15	COIL A/W 1.5T/4.5MM HOR 0.8MM	R230		036-16100-00	RES M/F 0805 100K 5%

Ref	Var	IPN	Description	Ref	Var	IPN	Description
R231		036-15100-00	RES M/F 0805 10K 5%	R329		036-14100-00	RES M/F 0805 1K 5%
R232		036-16330-00	RES M/F 0805 330K 5%	R330		036-12220-00	RES M/F 0805 22E 5%
R233		036-16100-00	RES M/F 0805 100K 5%	R333		030-03470-10	RES FILM 470E 5% 0.5W 7X2.5
R235		036-14470-00	RES M/F 0805 4K7 5%	R334		036-12680-00	RES M/F 0805 68E 5%
R237		036-15470-00	RES M/F 0805 47K 5%	R335		036-12100-00	RES M/F 0805 10E 5%
R238		036-15470-00	RES M/F 0805 47K 5%	R337		036-12100-00	RES M/F 0805 10E 5%
R239		036-14150-00	RES M/F 0805 1K5 5%	R338		036-13120-00	RES M/F 0805 120E 5%
R241		036-14470-00	RES M/F 0805 4K7 5%	R339		036-14100-00	RES M/F 0805 1K 5%
R242		036-14220-00	RES M/F 0805 2K2 5%	R341		036-16220-00	RES M/F 0805 220K 5%
R244		036-15100-00	RES M/F 0805 10K 5%	R343		036-15100-00	RES M/F 0805 10K 5%
R245		036-16100-00	RES M/F 0805 100K 5%	R345		036-14220-00	RES M/F 0805 2K2 5%
R247		036-15100-00	RES M/F 0805 10K 5%	R347		036-16330-00	RES M/F 0805 330K 5%
R248		036-16100-00	RES M/F 0805 100K 5%	R349		036-15100-00	RES M/F 0805 10K 5%
R249		036-16100-00	RES M/F 0805 100K 5%	R350		036-12220-00	RES M/F 0805 22E 5%
R251		036-16100-00	RES M/F 0805 100K 5%	R351		036-15150-00	RES M/F 0805 15K 5%
R253		036-16100-00	RES M/F 0805 100K 5%	R352		036-12680-00	RES M/F 0805 68E 5%
R254		036-16100-00	RES M/F 0805 100K 5%	R353		036-15150-00	RES M/F 0805 15K 5%
R255		036-15100-00	RES M/F 0805 10K 5%	R354		036-14560-00	RES M/F 0805 5K6 5%
R256		036-15470-00	RES M/F 0805 47K 5%	R355		036-16100-00	RES M/F 0805 100K 5%
R257		036-16330-00	RES M/F 0805 330K 5%	R357		036-15100-00	RES M/F 0805 10K 5%
R258		036-16150-00	RES M/F 0805 150K 5%	R359		036-15220-00	RES M/F 0805 22K 5%
R259		036-15220-00	RES M/F 0805 22K 5%	R360		036-14150-00	RES M/F 0805 1K5 5%
R260		036-15470-00	RES M/F 0805 47K 5%	R361		036-12680-00	RES M/F 0805 68E 5%
R262		036-15470-00	RES M/F 0805 47K 5%	R362		036-16100-00	RES M/F 0805 100K 5%
R263		036-14470-00	RES M/F 0805 4K7 5%	R363		036-15470-00	RES M/F 0805 47K 5%
&R264	10	036-15220-00	RES M/F 0805 22K 5%	R365		036-15220-00	RES M/F 0805 22K 5%
&R264	13	036-15220-00	RES M/F 0805 22K 5%	R367		036-15100-00	RES M/F 0805 10K 5%
&R264	15	036-15270-00	RES M/F 0805 27K 5%	R368		036-15220-00	RES M/F 0805 22K 5%
&R264	20	036-15220-00	RES M/F 0805 22K 5%	R369		036-16100-00	RES M/F 0805 100K 5%
&R264	23	036-15220-00	RES M/F 0805 22K 5%	R370		036-13100-00	RES M/F 0805 100E 5%
&R264	25	036-15270-00	RES M/F 0805 27K 5%	R371		036-16100-00	RES M/F 0805 100K 5%
&R264	30	036-15220-00	RES M/F 0805 22K 5%	R372		036-14680-00	RES M/F 0805 6K8 5%
&R264	35	036-15270-00	RES M/F 0805 27K 5%	R373		036-13820-00	RES M/F 0805 820E 5%
&R265	10	036-15150-00	RES M/F 0805 15K 5%	R374		036-14120-00	RES M/F 0805 1K2 5%
&R265	13	036-15150-00	RES M/F 0805 15K 5%	R376		036-14100-00	RES M/F 0805 1K 5%
&R265	15	036-15180-00	RES M/F 0805 18K 5%	R381		036-14100-00	RES M/F 0805 1K 5%
&R265	20	036-15150-00	RES M/F 0805 15K 5%	R382		036-12470-00	RES M/F 0805 47E 5%
&R265	23	036-15150-00	RES M/F 0805 15K 5%	R383		036-14100-00	RES M/F 0805 1K 5%
&R265	25	036-15180-00	RES M/F 0805 18K 5%	R384		036-13560-00	RES M/F 0805 560E 5%
&R265	30	036-15150-00	RES M/F 0805 15K 5%	R385		036-12470-00	RES M/F 0805 47E 5%
&R265	35	036-15180-00	RES M/F 0805 18K 5%	R386		036-14100-00	RES M/F 0805 1K 5%
&R266	10	036-15470-00	RES M/F 0805 47K 5%	R387		036-13470-00	RES M/F 0805 470E 5%
&R266	13	036-15470-00	RES M/F 0805 47K 5%	R389		036-16150-00	RES M/F 0805 150K 5%
&R266	15	036-15560-00	RES M/F 0805 56K 5%	R390		036-16150-00	RES M/F 0805 150K 5%
&R266	20	036-15470-00	RES M/F 0805 47K 5%	R391		036-16150-00	RES M/F 0805 150K 5%
&R266	23	036-15470-00	RES M/F 0805 47K 5%	R392		036-16150-00	RES M/F 0805 150K 5%
&R266	25	036-15560-00	RES M/F 0805 56K 5%	R393		036-14100-00	RES M/F 0805 1K 5%
&R266	30	036-15470-00	RES M/F 0805 47K 5%	R394		036-14100-00	RES M/F 0805 1K 5%
&R266	35	036-15560-00	RES M/F 0805 56K 5%	#R395	10	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R267		036-14220-00	RES M/F 0805 2K2 5%	#R395	13	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R268		036-13100-00	RES M/F 0805 100E 5%	#R395	15	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R269		036-15100-00	RES M/F 0805 10K 5%	#R395	20	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R270		036-14120-00	RES M/F 0805 1K2 5%	#R395	23	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R271		036-17100-00	RES M/F 0805 1M 5%	#R395	25	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R272		036-13560-00	RES M/F 0805 560E 5%	#R395	30	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R273		036-15120-00	RES M/F 0805 12K 5%	#R395	35	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R274		036-15150-00	RES M/F 0805 15K 5%	#R396	10	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R275		036-14270-00	RES M/F 0805 2K7 5%	#R396	13	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R277		036-16100-00	RES M/F 0805 100K 5%	#R396	15	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R278		036-16120-00	RES M/F 0805 120K 5%	#R396	20	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"
R279		036-17100-00	RES M/F 0805 1M 5%	#R396	23	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"
R280		036-15100-00	RES M/F 0805 10K 5%	#R396	25	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"
R282		036-15560-00	RES M/F 0805 56K 5%	#R396	30	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"
R283		036-15560-00	RES M/F 0805 56K 5%	#R396	35	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"
R284		036-17100-00	RES M/F 0805 1M 5%	#R397	10	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R285		036-10000-00	RES M/F 0805 ZERO OHM	#R397	13	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R286		036-14220-00	RES M/F 0805 2K2 5%	#R397	15	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R287		036-15100-00	RES M/F 0805 10K 5%	#R397	20	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R288		036-15150-00	RES M/F 0805 15K 5%	#R397	23	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R289		036-16100-00	RES M/F 0805 100K 5%	#R397	25	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R290		036-13560-00	RES M/F 0805 560E 5%	#R397	30	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R291		036-10000-00	RES M/F 0805 ZERO OHM	#R397	35	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R292		036-14470-00	RES M/F 0805 4K7 5%	R399		036-12470-00	RES M/F 0805 47E 5%
R293		036-15470-00	RES M/F 0805 47K 5%	#R410	10	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R294		036-14470-00	RES M/F 0805 4K7 5%	#R410	13	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R295		036-14270-00	RES M/F 0805 2K7 5%	#R410	15	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R296		036-14100-00	RES M/F 0805 1K 5%	#R410	20	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R297		036-14560-00	RES M/F 0805 5K6 5%	#R410	23	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
%R298		036-16100-00	RES M/F 0805 100K 5%	#R410	25	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R299		036-14270-00	RES M/F 0805 2K7 5%	#R410	30	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R300		036-14100-00	RES M/F 0805 1K 5%	#R410	35	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R301		036-15100-00	RES M/F 0805 10K 5%	#R420	10	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R302		036-14100-00	RES M/F 0805 1K 5%	#R420	13	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R303		036-15100-00	RES M/F 0805 10K 5%	#R420	15	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6
R304		036-15470-00	RES M/F 0805 47K 5%	#R420	20	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6
R305		036-15330-00	RES M/F 0805 33K 5%	#R420	23	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6
R306		036-15100-00	RES M/F 0805 10K 5%	#R420	25	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6
R307		036-14470-00	RES M/F 0805 4K7 5%	#R420	30	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6
R309		036-12100-00	RES M/F 0805 10E 5%	#R420	35	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6
R311		036-14470-00	RES M/F 0805 4K7 5%	#R430	10	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R315		036-15100-00	RES M/F 0805 10K 5%	#R430	13	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
%R317		036-15470-00	RES M/F 0805 47K 5%	#R430	15	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R319		036-15470-00	RES M/F 0805 47K 5%	#R430	20	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R321		036-16100-00	RES M/F 0805 100K 5%	#R430	23	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R323		036-16220-00	RES M/F 0805 220K 5%	#R430	25	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R324		036-13220-00	RES M/F 0805 220E 5%	#R430	30	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R325		036-14220-00	RES M/F 0805 2K2 5%	#R430	35	030-52100-20	RES FILM AI 10E 5% 0.4W 4X1.6
R327		036-13100-00	RES M/F 0805 100E 5%	#R440	10	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6

Ref	Var	IPN	Description	Ref	Var	IPN	Description
#R440	13	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R725		036-15390-00	RES M/F 0805 39K 5%
#R440	15	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	%R726		036-13100-00	RES M/F 0805 100E 5%
#R440	20	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6	R727		036-15100-00	RES M/F 0805 10K 5%
#R440	23	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6	R728		036-15100-00	RES M/F 0805 10K 5%
#R440	25	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6	R742		036-13150-00	RES M/F 0805 150E 5%
#R440	30	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6	R743		036-13150-00	RES M/F 0805 150E 5%
#R440	35	030-53820-20	RES FILM AI 820E 5% 0.4W 4X1.6	R744		036-12220-00	RES M/F 0805 22E 5%
R450		032-32220-00	RES M/F PWR 22E 5% 1W 12X4.5MM	R746		036-12220-00	RES M/F 0805 22E 5%
R460		036-14470-00	RES M/F 0805 4K7 5%	R747		036-12220-00	RES M/F 0805 22E 5%
R470		036-13100-00	RES M/F 0805 100E 5%	R748		036-15470-00	RES M/F 0805 47K 5%
R480		036-13100-00	RES M/F 0805 100E 5%	R749		036-15470-00	RES M/F 0805 47K 5%
R481		045-04470-01	RES NTC 4K7 5% 5MM DISC	R750		036-12220-00	RES M/F 0805 22E 5%
R490		036-14470-00	RES M/F 0805 4K7 5%	R752		036-12220-00	RES M/F 0805 22E 5%
R500		036-12680-00	RES M/F 0805 68E 5%	R753		036-17100-00	RES M/F 0805 1M 5%
R501		036-15100-00	RES M/F 0805 10K 5%	R754		036-14100-00	RES M/F 0805 1K 5%
R502		036-15100-00	RES M/F 0805 10K 5%	R756		036-16100-00	RES M/F 0805 100K 5%
R503		036-14560-00	RES M/F 0805 5K6 5%	R757		036-16100-00	RES M/F 0805 100K 5%
R504		036-13330-00	RES M/F 0805 330E 5%	R758		036-14120-00	RES M/F 0805 1K2 5%
R505		036-15150-00	RES M/F 0805 15K 5%	R759		036-13330-00	RES M/F 0805 330E 5%
R510		036-14150-00	RES M/F 0805 1K5 5%	R760		036-13180-00	RES M/F 0805 180E 5%
R514		036-12330-00	RES M/F 0805 33E 5%	R762		036-13100-00	RES M/F 0805 100E 5%
R515		036-12560-00	RES M/F 0805 56E 5%	R763		036-13100-00	RES M/F 0805 100E 5%
#R517	10	036-13150-00	RES M/F 0805 150E 5%	R765		036-13680-00	RES M/F 0805 680E 5%
#R517	13	036-13150-00	RES M/F 0805 150E 5%	R766		036-14100-00	RES M/F 0805 1K 5%
#R517	15	036-13150-00	RES M/F 0805 150E 5%	R767		036-13680-00	RES M/F 0805 680E 5%
#R517	20	036-13330-00	RES M/F 0805 330E 5%	R769		036-13180-00	RES M/F 0805 180E 5%
#R517	23	036-13330-00	RES M/F 0805 330E 5%	R771		036-14820-00	RES M/F 0805 8K2 5%
#R517	25	036-13330-00	RES M/F 0805 330E 5%	R772		036-15220-00	RES M/F 0805 22K 5%
#R517	30	036-13330-00	RES M/F 0805 330E 5%	R774		036-14820-00	RES M/F 0805 8K2 5%
#R517	35	036-13330-00	RES M/F 0805 330E 5%	R775		036-15180-00	RES M/F 0805 18K 5%
#R518	10	036-12330-00	RES M/F 0805 33E 5%	R777		036-14220-00	RES M/F 0805 2K2 5%
#R518	13	036-12330-00	RES M/F 0805 33E 5%	R780		036-12680-00	RES M/F 0805 68E 5%
#R518	15	036-12330-00	RES M/F 0805 33E 5%	R782		036-12180-00	RES M/F 0805 18E 5%
#R518	20	036-12180-00	RES M/F 0805 18E 5%	R784		036-13120-00	RES M/F 0805 120E 5%
#R518	23	036-12180-00	RES M/F 0805 18E 5%	R785		036-14330-00	RES M/F 0805 3K3 5%
#R518	25	036-12180-00	RES M/F 0805 18E 5%	R786		036-12100-00	RES M/F 0805 10E 5%
#R518	30	036-12180-00	RES M/F 0805 18E 5%	R787		036-12100-00	RES M/F 0805 10E 5%
#R518	35	036-12180-00	RES M/F 0805 18E 5%	R790		036-13390-00	RES M/F 0805 390E 5%
#R519	10	036-13150-00	RES M/F 0805 150E 5%	R791		036-14100-00	RES M/F 0805 1K 5%
#R519	13	036-13150-00	RES M/F 0805 150E 5%	R801		036-16150-00	RES M/F 0805 150K 5%
#R519	15	036-13150-00	RES M/F 0805 150E 5%	R802		036-15470-00	RES M/F 0805 47K 5%
#R519	20	036-13330-00	RES M/F 0805 330E 5%	R808		036-12100-00	RES M/F 0805 10E 5%
#R519	23	036-13330-00	RES M/F 0805 330E 5%	R809		036-14470-00	RES M/F 0805 4K7 5%
#R519	25	036-13330-00	RES M/F 0805 330E 5%	R810		036-14470-00	RES M/F 0805 4K7 5%
#R519	30	036-13330-00	RES M/F 0805 330E 5%	R811		036-14470-00	RES M/F 0805 4K7 5%
#R519	35	036-13330-00	RES M/F 0805 330E 5%	R812		036-14470-00	RES M/F 0805 4K7 5%
R520		036-13150-00	RES M/F 0805 150E 5%	R813		036-14470-00	RES M/F 0805 4K7 5%
R523		036-16120-00	RES M/F 0805 120K 5%	R815		036-15470-00	RES M/F 0805 47K 5%
R525		036-15470-00	RES M/F 0805 47K 5%	R816		036-16150-00	RES M/F 0805 150K 5%
R530		036-15220-00	RES M/F 0805 22K 5%	R818		036-14470-00	RES M/F 0805 4K7 5%
R535		036-15100-00	RES M/F 0805 10K 5%	R819		036-14470-00	RES M/F 0805 4K7 5%
R540		036-14220-00	RES M/F 0805 2K2 5%	R821		036-15470-00	RES M/F 0805 47K 5%
R545		036-14470-00	RES M/F 0805 4K7 5%	R822		036-15470-00	RES M/F 0805 47K 5%
%R550		036-14120-00	RES M/F 0805 1K2 5%	R824		036-14220-00	RES M/F 0805 2K2 5%
R555		036-14470-00	RES M/F 0805 4K7 5%	R825		036-14220-00	RES M/F 0805 2K2 5%
R560		036-13470-00	RES M/F 0805 470E 5%	R826		036-14220-00	RES M/F 0805 2K2 5%
R609		036-14100-00	RES M/F 0805 1K 5%	R827		036-14220-00	RES M/F 0805 2K2 5%
R613		036-13560-00	RES M/F 0805 560E 5%	R828		036-14220-00	RES M/F 0805 2K2 5%
R615		036-13100-00	RES M/F 0805 100E 5%	R829		036-14220-00	RES M/F 0805 2K2 5%
R617		036-10000-00	RES M/F 0805 ZERO OHM	R830		036-14220-00	RES M/F 0805 2K2 5%
R619		036-01100-10	RES 1 OHM 1 WATT 2512 CHIP	R831		036-14220-00	RES M/F 0805 2K2 5%
R621		036-01100-10	RES 1 OHM 1 WATT 2512 CHIP	R832		036-14220-00	RES M/F 0805 2K2 5%
R625		036-14100-00	RES M/F 0805 1K 5%	R833		036-14220-00	RES M/F 0805 2K2 5%
R629		036-03270-10	RES 270 OHM 1 WATT 2512 CHIP	R835		036-14220-00	RES M/F 0805 2K2 5%
R633		036-14680-00	RES M/F 0805 6K8 5%	R836		036-14220-00	RES M/F 0805 2K2 5%
R637		036-12220-00	RES M/F 0805 22E 5%	R837		036-14220-00	RES M/F 0805 2K2 5%
R641		036-14150-00	RES M/F 0805 1K5 5%	R840		036-14220-00	RES M/F 0805 2K2 5%
R645		036-13470-00	RES M/F 0805 470E 5%	R841		036-14220-00	RES M/F 0805 2K2 5%
R649		036-14470-00	RES M/F 0805 4K7 5%	R842		036-14220-00	RES M/F 0805 2K2 5%
R653		036-15100-00	RES M/F 0805 10K 5%	R843		036-14220-00	RES M/F 0805 2K2 5%
R657		036-15100-00	RES M/F 0805 10K 5%	R845		036-13470-00	RES M/F 0805 470E 5%
R661		036-15100-00	RES M/F 0805 10K 5%	R846		036-13470-00	RES M/F 0805 470E 5%
R665		036-16100-00	RES M/F 0805 100K 5%	R847		036-13470-00	RES M/F 0805 470E 5%
R669		036-15470-00	RES M/F 0805 47K 5%	R848		036-14470-00	RES M/F 0805 4K7 5%
R673		036-16100-00	RES M/F 0805 100K 5%	R849		036-13470-00	RES M/F 0805 470E 5%
R677		036-15470-00	RES M/F 0805 47K 5%	R850		036-13470-00	RES M/F 0805 470E 5%
R681		036-13100-00	RES M/F 0805 100E 5%	R853		036-14470-00	RES M/F 0805 4K7 5%
R685		036-15150-00	RES M/F 0805 15K 5%	R854		036-14470-00	RES M/F 0805 4K7 5%
R689		036-12100-00	RES M/F 0805 10E 5%	R855		036-14470-00	RES M/F 0805 4K7 5%
R693		036-16100-00	RES M/F 0805 100K 5%	R859		036-16150-00	RES M/F 0805 150K 5%
R696		036-15560-00	RES M/F 0805 56K 5%	R861		036-16150-00	RES M/F 0805 150K 5%
R701		036-12220-00	RES M/F 0805 22E 5%	R863		036-16150-00	RES M/F 0805 150K 5%
R702		036-17100-00	RES M/F 0805 1M 5%	R865		036-16100-00	RES M/F 0805 100K 5%
R703		036-17100-00	RES M/F 0805 1M 5%	R867		036-16100-00	RES M/F 0805 100K 5%
R706		036-15150-00	RES M/F 0805 15K 5%	R871		036-15470-00	RES M/F 0805 47K 5%
R708		036-16100-00	RES M/F 0805 100K 5%	R872		036-14470-00	RES M/F 0805 4K7 5%
R710		036-13100-00	RES M/F 0805 100E 5%	R873		036-15330-00	RES M/F 0805 33K 5%
R711		036-13100-00	RES M/F 0805 100E 5%	R874		036-14470-00	RES M/F 0805 4K7 5%
R712		036-12100-00	RES M/F 0805 10E 5%	R875		036-15470-00	RES M/F 0805 47K 5%
R713		036-12220-00	RES M/F 0805 22E 5%	R876		036-14470-00	RES M/F 0805 4K7 5%
%R715		036-14100-00	RES M/F 0805 1K 5%	R877		036-14470-00	RES M/F 0805 4K7 5%
R717		036-14270-00	RES M/F 0805 2K7 5%	R879		036-15100-00	RES M/F 0805 10K 5%
R718		036-16150-00	RES M/F 0805 150K 5%				
R719		036-16150-00	RES M/F 0805 150K 5%				
R720		036-15390-00	RES M/F 0805 39K 5%	RV210		040-05100-23	POT 10K LOG PCB 15MM SLOT SFT
R721		036-15100-00	RES M/F 0805 10K 5%	RV220		042-05500-05	RES PRESET SMD 50K CER 4MM SQ
R722		036-15100-00	RES M/F 0805 10K 5%	RV310		042-05100-05	RES PRESET SMD 10K CER 4MM SQ
R723		036-14270-00	RES M/F 0805 2K7 5%	RV320		042-04220-05	RES PRESET SMD 2K CER 4MM SQ
				RV330		042-06500-05	RES PRESET SMD 500K CER 4MM SQ

Ref	Var	IPN	Description	Ref	Var	IPN	Description
RV805		042-05200-05	RES PRESET SMD 20K CER 4MM SQ				
SK205		240-02020-05	SKT STEREO PHONE JACK PCB MTG				
SK310		240-02100-44	SKT COAX MINI JACK PCB MT ANG.				
SK410		240-02100-44	SKT COAX MINI JACK PCB MT ANG.				
SK501		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK502		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK503		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK504		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK505		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK513		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK522		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK531		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK532		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK533		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK534		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK535		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK805		240-10000-07	CONN SMD SKT 16W 2R M-MATCH				
SK810		240-04020-42	SKT 44 PIN SMD PLCC				
SW230		232-00010-26	SWITCH PUSH SPDT R-ANG PCB MTG				
T210		053-00010-17	XFMR T4030 LINE MATCH POTCORE				
T610		050-00016-50	COIL TAIT NO 650 455KHZ				

T856 Mechanical & Miscellaneous Parts (220-01397-01)

IPN	Legend	Description	IPN	Legend	Description
070-01001-00	14/37	D-RANGE 15 WAY COMPL T800	356-00010-05	34	TAG SOLDER 4MM LONG M6144/4.2
070-02001-00		LED RED COMPL T800 RX/TX/EX	362-00010-23	35	GASKET SIL TO-220 CLIP MTG.
070-02002-00		LED GREEN COMPL T800 RX/TX/EX	362-00010-33	36	GROMMET LED MTG 3MM
200-00010-05		WIRE T/C 0.5 For ferrite beads.	365-00011-53		LABEL 104X37MM
206-00010-11		COAX 50 OHM RG316-U PTFE Connects SK310 to SK410.	365-00100-09		LABEL WHITE VINYL 15X11MM S/A
220-01145-02	1	PCB T855/856/857 VCO	365-00100-20		LABEL WHITE S/A 28X11MM
220-01397-01	2	PCB T856 SERIES II	365-01541-00		LABEL TX/RX/EX TYPE APR/SER NO
232-00020-26	3	BUTTON 232-00010-26 SWITCH	399-00010-51		BAG PLASTIC 75X100MM
240-00100-43		PLG COAX MINI PIN CRIMP 1.5D For coax connecting SK310 to SK410.	410-01081-01		CRT T800 SERIES II
240-02100-06	4	SKT COAX N TYPE PNL MTG OP-TER	410-01082-01		CRTN 10 T800 KIWI 423X410X360
240-04020-62		SKT 2 W RECEP SHORTING LINK PL205/210/215/220.			
303-11169-03	5	CHASSIS PAINTED T800 SER II			
303-23118-00	6	COVER A3M2247 D RANGE			
303-50074-00	7	CLIP A3M2246 SPRING CLAMP			
303-50078-00	8	CLIP A4M2630 SPR. CABLE CLAMP			
308-01007-01	9	HANDLE BASE STATION SERIES II			
308-13090-00	10	HSINK A4M2361 BRKT COPPER T856			
312-01052-01	11	LID TOP T800 SER II PTND			
312-01053-01	12	LID BOTTOM T800 SER II PNTD			
316-06621-00	13	PNL FRT TX T800 SERIES II			
319-01173-00	15	SHIELD A3M2880 D-RANGE T856			
319-01174-00	16	SHIELD A4M2881 N-CONN T856			
345-00040-08	17	SCRW M3X12MM P/POZ ST BZ			
345-00040-10	18	SCRW M3X6MM P/POZ ST BZ			
349-00020-09	19	SCRW T/T 4-40X3/8 IN P/POZ BLK			
349-00020-31	20	SCRW T/T M3X10MM P/POZ BZ			
349-00020-34	21	SCRW M3X12 P/POZ T/T BZ			
349-00020-36	22	LIM)SCREW TT M3X8m PANTORX BLK			
349-00020-43	23	SCRW T/T M4X12MM P/POZ BZ			
349-00020-45	24	SCRW T/T M4X20MM P/POZ BZ			
350-00016-42	25	SPACER 5MM HI 8MM ST 2.5MM HO			
352-00010-08	26	NUT M3 COLD FORM HEX ST BZ			
352-00010-29	27	NUT M4 NYLOC HEX			
352-00010-35	28	NUT 8-32 UNC HEX XSTR MTG			
353-00010-10	29	WSHR M3 FLAT 7MMX0.6MM ST BZ			
353-00010-12	30	WSHR M3 SPRING BZ OR Z/C			
353-00010-13	31	WSHR M3 S/PROOF INT BZ			
353-00010-24	32	WSHR M4 FLAT ST BZ A4M1957			
356-00010-01	33	TAG SOLDER 3MM SHORT M6132/3.2			

replace A4 pages C6.2.11/C6.2.12 with A3 pages C6.2.11/C6.2.12

replace A4 pages C6.2.11/C6.2.12 with A3 pages C6.2.11/C6.2.12

T856 Grid Reference Index (IPN 220-01397-01)

How To Use This Grid Reference Index

The first digit in the PCB layout reference is a "1" or "2", indicating the top or bottom side layout respectively, and the last two characters give the location of the component on that diagram.


The first digit in the circuit diagram reference is the sheet number, and the last two characters give the location of the component on that sheet.

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
C201	1:C1	2-B8	C305	1:F7	3-E5	C372	1:F9	3-P7	C628	1:M6	6-R8
C202	1:C1	2-C8	C306	1:F7	3-F7	C373	1:F9	3-P7	C630	1:M5	6-K4
C204	1:A2	2-E8	C307	1:F7	3-F7	C380	1:E6	3-P1	C631A	1:M5	6-M5
C205	1:A2	2-E8	C308	1:F8	3-G7	#C382	1:E6	3-Q1	C634	1:N5	6-M4
C207	1:C7	2-B6	C309	1:F8	3-J7	C383	1:F3	3-B2	C636	1:M5	6-M4
C209	1:C6	2-D6	C310	1:F8	3-K7	#C384	1:E6	3-R2	C638	1:M6	6-P5
C210	1:C7	2-K0	C311	1:F8	3-G6	C385	1:F3	3-D0	C640	1:M5	6-R5
C211	1:B7	2-F8	C312	1:F8	3-G5	C405	2:H8	4-D4	C655	1:M4	6-C1
C213	1:B6	2-G8	C313	1:E9	3-C8	#C410	2:J8	4-E3	C660	1:L5	6-K1
C215	1:B6	2-G8	C314	1:F8	3-G5	C415	2:J7	4-F3	C665	1:L5	6-K1
C217	1:C6	2-H8	C315	1:E8	3-C7	C419	1:G8	4-C6	C670	1:L6	6-L1
C219	1:C6	2-H7	C316	1:F8	3-H6	C420	1:G8	4-D6	C673	1:L5	6-P2
C221	1:D5	2-G6	C317	1:F8	3-H5	C421	1:G8	4-D6	C677	1:L6	6-P1
C223	1:C5	2-J6	C318	1:F8	3-J5	C430	1:J7	4-H6	C681	1:M5	6-R3
C225	1:C3	2-K7	C320	1:F5	3-P5	C435	1:M7	4-J6	C684	1:M6	6-R3
C227	1:B4	2-K7	C324	1:F6	3-Q5	C438	2:K8	4-G4	C687	1:L6	6-Q1
C229	1:B3	2-L7	C326	1:F6	3-Q4	#C440	2:K8	4-H4	C690	1:L6	6-R1
C230	1:B4	2-J0	C327	1:F7	3-C3	#C445	2:K7	4-J4	C693	1:L6	6-R1
C232	1:A4	2-M7	C328	1:F6	3-R4	C450	1:L7	4-K5	C700	1:K4	7-A8
C233	1:A5	2-N7	C329	1:F6	3-R4	C455	1:M7	4-L5	C701	1:J3	7-B8
C235	1:B5	2-K5	C330A	1:E8	3-G8	#C460	2:L7	4-K4	C703	1:J3	7-B7
C237	1:C4	2-K5	C330B	1:E8	3-G8	#C465	2:L8	4-L4	C705	1:J3	7-B7
C239	1:C4	2-L4	C331	1:F3	3-B2	C470	2:L8	4-M4	C706	1:J2	7-B5
C241	1:B4	2-M6	C332	1:F8	3-B3	#C480	2:M8	4-N4	%C707	1:K4	7-C8
C242	1:B4	2-L6	C333	1:F3	3-B0	C481	1:J8	4-P7	C708	1:J2	7-C9
C243	1:B4	2-P6	C334	1:F7	3-C3	C485	1:M9	4-M5	C709	1:K4	7-D9
C245	1:C5	2-A4	C335	1:F7	3-F5	C490	1:M9	4-N5	C710	1:J3	7-E8
C247	1:D4	2-B4	C336	1:F7	3-F5	C493	2:M8	4-N4	C712	1:H2	7-E7
C249	1:D4	2-C4	C337	1:E7	3-F3	C496	1:N7	4-P3	%C713	1:H2	7-E6
C251	1:C3	2-E4	C338	1:E7	3-F2	C499	1:N7	4-Q3	C720	1:J3	7-F8
C253	1:D3	2-E3	C339	1:E7	3-F3	C501	1:K4	5-B6	C722	1:J4	7-G8
C255	1:D3	2-D2	C340	1:E7	3-H4	C502	1:K4	5-C6	C724	1:J4	7-H6
C257	1:D3	2-F2	C341	1:F3	3-G3	C503	1:K6	5-L9	C725	1:J4	7-J6
C259	1:C6	2-J2	C342	1:F3	3-H3	C504	1:K6	5-M6	C726	1:K4	7-J6
C260	1:D8	2-H0	C343	1:F3	3-J3	C505	1:K6	5-N6	C727	1:J3	7-J8
C261	1:C6	2-K2	C344	1:F3	3-J4	C507	1:K6	5-B5	C729	1:J3	7-M8
C263	1:D6	2-L3	C345	1:F3	3-K4	C508	1:K6	5-C0	%C733	1:J3	7-M5
C265	1:D6	2-N4	C346	1:F3	3-K4	C509	1:K6	5-D0	C735	1:J2	7-A1
C267	1:C8	2-P3	C347	1:F3	3-L4	C510	1:J5	5-D1	C736	1:J2	7-B1
&C269	1:C8	2-P3	C348	1:F3	3-M4	C512	1:J5	5-E1	C740A	1:H2	7-B4
C271	1:C8	2-Q3	C349	1:F3	3-M4	C513	1:J5	5-H1	C740B	1:H2	7-B3
C273	1:C8	2-Q4	C350A	1:F7	3-J8	C514	1:J5	5-J1	C741A	1:H2	7-C4
C275	1:D3	2-E1	C350B	1:F7	3-J8	C516	1:H5	5-H4	C741B	1:G2	7-C3
C277	1:C4	2-G1	C351	1:F4	3-H1	C517	1:H5	5-H4	C742A	1:H2	7-D4
C279	1:B4	2-G1	C352	1:F4	3-J0	C519	1:H5	5-J5	C742B	1:H3	7-D3
C281	1:B5	2-J1	C353	1:F4	3-J0	C525	1:K4	5-K5	C743	1:H2	7-B1
C283	1:B5	2-K0	C354	1:F4	3-K0	C530	1:K5	5-L4	C745	1:G3	7-D1
C285	1:D7	2-L0	C355	1:F4	3-K1	C535	1:K5	5-L2	C750A	1:H4	7-Q7
C287	1:C6	2-M1	C356	1:F3	3-K2	C537	1:K5	5-N2	C750B	1:H4	7-R7
C289	1:C8	2-N1	C358	1:E4	3-K1	C605	1:L6	6-D8	C757	1:G4	7-F5
C291	1:D7	2-P1	C360	1:E4	3-L1	C610A	1:M5	6-F8	C759	1:G4	7-G4
C293	1:D7	2-Q1	C362	1:E5	3-N2	C610B	1:M5	6-G8	C761	1:G3	7-J4
%C294	1:D7	2-Q0	C364	1:E4	3-M2	C611A	1:L5	6-H8	C762	1:G3	7-J4
%C295	1:D6	2-Q0	C366	1:F4	3-N2	C611B	1:M5	6-J8	C763	1:H3	7-K4
C300	1:F8	3-B8	C368	1:E5	3-N1	C620	1:N5	6-K9	C764	1:H3	7-H2
C301	1:F9	3-B7	C370A	1:F8	3-K7	C621	1:N5	6-L9	C765	1:G3	7-J2
C302	1:E8	3-A6	C370B	1:F8	3-L7	C623	1:N6	6-N7	C766	1:G3	7-J2
C303	1:E8	3-A6	C370C	1:F8	3-L7	C625	1:M6	6-Q8	C767	1:H3	7-K3
C304	1:E8	3-C6	C371	1:F8	3-N7	C626	1:M6	6-R8	C768	1:H4	7-L4

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
C769	1:H4	7-M4	IC210	1:C7	2-K2	L410	1:H7	4-D4	Q220	1:B3	2-L7
C770	1:H4	7-N4	IC210	1:C7	2-L1	L415	1:G7	4-D3	Q230	1:A4	2-M8
C772	1:G4	7-M2	IC210	1:C7	2-C6	L418	2:H8	4-F4	Q240	1:B7	2-Q7
C774	1:H4	7-P2	IC220	1:D6	2-P0	L420	1:G8	4-D6	Q250	1:B7	2-R5
C776	1:H4	7-N1	IC220	1:D6	2-M3	L425	1:G7	4-C6	Q260	1:C4	2-F3
C782	1:G2	7-N1	IC220	1:D6	2-D5	L430	1:J7	4-G6	Q270	1:D2	2-D1
C784	1:G2	7-R1	IC230	1:B4	2-H0	L435	1:J7	4-F5	Q310	1:F8	3-H5
C786	1:G2	7-R1	IC230	1:B4	2-G1	L440	2:K8	4-G4	Q315	1:F8	3-J6
C788	1:G3	7-P0	IC230	1:B4	2-N6	L445	1:K7	4-G4	Q320	1:E7	3-E4
C790	1:G3	7-R0	IC230	1:B4	2-J0	L450	1:J7	4-G3	Q325	1:E7	3-E3
C792	1:G4	7-R0	IC230	1:B4	2-L5	L455	2:K8	4-J4	Q330	1:E7	3-G3
C810	1:L3	8-K8	IC240	1:D4	2-F3	L460	1:M7	4-J6	Q335	1:F3	3-J4
C812	1:L2	8-F5	IC250	1:D3	2-E1	L465	1:L7	4-J5	Q340	1:F3	3-L4
C813	1:K2	8-H5	IC260	1:D8	2-N0	L470	2:L8	4-K4	Q345	1:F3	3-M3
C822	1:M2	8-B2	IC260	1:D8	2-H0	L475	2:L8	4-L4	Q350	1:E4	3-M1
C823	1:M3	8-C2	IC260	1:D8	2-Q2	L480	1:M9	4-N6	Q355	2:E6	3-Q2
C824	1:M2	8-C1	IC260	1:D8	2-Q3	L481	1:J9	4-Q7	Q410	2:J8	4-F4
C826	1:N3	8-C0	IC260	1:D8	2-N3	L485	1:N7	4-Q4	Q420	2:L8	4-J4
C827	1:N3	8-D0	IC330	1:E8	3-D8	L520	1:K6	5-C1	Q505	1:J6	5-K8
C828	1:N3	8-E0	IC330	1:E8	3-H8	L610	1:N5	6-L9	Q510	1:J5	5-E1
C830	1:N3	8-R1	IC330	1:E8	3-D7	L620	1:N6	6-L9	Q520	1:H5	5-J4
C838	1:N4	8-F0	IC350	1:F7	3-K8	L750	1:G3	7-Q0	Q530	1:K5	5-H1
C841	1:N2	8-K2	IC350	1:F7	3-C4	#L910	1:P8	9-C8	Q540	1:K5	5-L3
C844	1:M2	8-L2	IC350	1:F7	3-F6	L920	1:P8	9-E8	Q550	1:K5	5-L4
#C900	2:N8	9-C6	IC370	1:F9	3-M6	#L930	1:P7	9-G8	Q610	1:L6	6-E8
C910	2:P8	9-D6	IC610	1:M5	6-G8	#L940	1:P6	9-J8	Q620	1:N6	6-P8
#C920	2:P8	9-E6	IC630	1:N5	6-K5				Q630	1:M6	6-P5
#C930	2:P8	9-E7	IC640	1:M5	6-F1	P100	1:Q6	1-R8	Q660	1:L5	6-N1
C940	2:P7	9-F6	IC640	1:M5	6-Q5	P150	1:P2	1-Q4	Q670	1:L6	6-Q2
#C950	2:P7	9-G6	IC640	1:M5	6-N5	P160	1:P2	1-Q4	Q710	1:J3	7-K8
#C960	2:P7	9-G7	IC650	1:L5	6-F4	P170	1:P2	1-Q3	Q720	1:J3	7-K8
C970	2:P7	9-H6	=IC700	1:K3	7-A8	P204	1:D1	2-A8	Q730	1:H3	7-N8
#C980	2:P6	9-J6	IC710	1:J2	7-E8	P208	1:D1	2-A8	Q740	1:H3	7-N8
#C990	2:P6	9-K6	IC710	1:J2	7-C6	P215	1:D4	2-A2	Q750	1:G4	7-F3
#CV475	1:M8	4-M4	IC710	1:J2	7-G0	P217	1:D4	2-A2	Q760	1:H3	7-H3
			IC710	1:J2	7-D6	P219	1:D2	2-A1	Q770	1:H3	7-H1
D111	1:P4	1-R1	IC710	1:J2	7-D7	P225	1:D2	2-A0	Q775	1:H3	7-K3
%D205	1:B2	2-D9	IC710	1:J2	7-D6	P230	1:C5	2-B0	Q780	1:H3	7-K3
%D210	1:B2	2-E9	IC710	1:J2	7-C6	P231	1:D8	2-B0	Q785	1:H3	7-K2
D220	1:B4	2-P7	IC720	1:J3	7-P6	P233	1:C1	2-R9	Q790	1:H4	7-L3
D220	1:B4	2-P6	IC720	1:J3	7-J0	P235	1:C1	2-R9	Q795	1:G3	7-P0
D230	1:B7	2-R5	IC720	1:J3	7-N7	P237	1:B7	2-R8	Q810	1:M2	8-E7
D240	1:D4	2-C4	IC720	1:J3	7-M7	P239	1:C7	2-R8	Q820	1:L2	8-D5
D240	1:D4	2-B2	IC720	1:J3	7-K7	P240	1:C7	2-R8	Q830	1:L2	8-D5
D250	1:D3	2-E2	IC720	1:J3	7-F8	P243	1:B7	2-R7	Q840	1:L2	8-F5
D250	1:D3	2-D3	IC720	1:J3	7-K0	P244	1:B7	2-R7	Q850	1:M2	8-G5
D260	1:C2	2-C2	IC730	1:J4	7-H8	P245	1:B8	2-R6	Q860	1:L4	8-B3
D260	1:C2	2-C2	IC730	1:J4	7-G7	P247	1:B8	2-R6			
D270	1:D2	2-C1	IC740	1:H2	7-D1	P248	1:B7	2-R6	%R150	1:P2	1-R4
D270	1:D2	2-C1	IC750	1:H4	7-M3	P249	1:C7	2-R5	R160	1:P2	1-R3
D340	1:F4	3-J1	IC750	1:H4	7-H5	P251	1:C7	2-R5	R201	1:B2	2-E9
D360	1:F4	3-J1	IC750	1:H4	7-Q7	P255	1:D4	2-R4	R202	1:C1	2-F9
D380	1:F4	3-J1	IC820	1:L4	8-N2	P257	1:C2	2-R4	R204	1:C7	2-B6
D420	1:M8	4-N5	IC830	1:N3	8-J0	P259	1:B8	2-R3	R205	1:C7	2-D6
D440	1:N7	4-P4	IC830	1:N3	8-Q1	P261	1:B8	2-R3	R206	1:B7	2-G8
D510	1:K6	5-K8	IC830	1:N3	8-J0	P263	1:B2	2-R2	R207	1:B6	2-G8
D510	1:K6	5-K9	IC830	1:N3	8-J1	P267	1:C8	2-N2	R208	1:B6	2-G8
D610	1:N6	6-L6	IC830	1:N3	8-C0	P269	1:D8	2-P2	R209	1:C6	2-H8
D610	1:N6	6-K6				P271	1:C9	2-N1	R210	1:B6	2-H7
D620	1:N4	6-B1	L302	1:F9	3-B5	P273	1:D9	2-P0	R212	1:D4	2-F6
D620	1:N4	6-B2	L303	1:F8	3-L8	P275	1:D7	2-Q0	R213	1:C4	2-G6
D630	1:M5	6-G2	L304	1:F5	3-P5	P805	1:M2	8-A7	R214	1:D4	2-G6
D630	1:M5	6-G3	L305	1:F5	3-P4	P810	1:L3	8-A5	R215	1:C4	2-H6
D635	1:M4	6-G3	L310	1:F6	3-Q5	P820	1:L4	8-M8	R216	1:C3	2-K7
D640	1:L5	6-M1	L315	1:F6	3-Q4	P825	1:L4	8-M8	R217	1:A4	2-M8
D640	1:L5	6-M2	L320	1:F4	3-K2	P830	1:L4	8-M8	R218	1:B4	2-N7
D710	1:J3	7-L8	L325	1:E4	3-K1	P835	1:L4	8-M7	R219	1:B4	2-N8
D710	1:J3	7-L8	L330	1:E4	3-L1	P840	1:L4	8-M7	R221	1:B7	2-R7
D720	1:H3	7-P8	L333	1:F3	3-H4				R223	1:B4	2-K6
D720	1:H3	7-P8	L334	1:F3	3-C0	PL100	1:P3	1-F0	R224	1:C4	2-K5
D730	1:H3	7-H1	L335	1:E4	3-M2	PL205	1:C5	2-J8	R225	1:B4	2-L5
D740	1:H3	7-J2	L340	1:E5	3-N2	PL210	1:C3	2-H4	R226	1:B4	2-L4
D810	1:M2	8-B7	L345	1:E5	3-P1	PL215	1:C4	2-K3	R227	1:B4	2-M4
			L350	1:E5	3-Q2	PL220	1:C4	2-H2	R229	1:B4	2-M7
IC210	1:C7	2-J0	L355	1:E6	3-Q2				R230	1:B4	2-M6
IC210	1:C7	2-Q0	L405	1:H8	4-C3	Q210	1:C6	2-J8	R231	1:B4	2-M6

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
R232	1:B4	2-M5	R329	1:F5	3-P5	R525	1:J5	5-D1	R767	1:H3	7-K2
R233	1:B4	2-M6	R330	1:E8	3-H9	R530	1:J5	5-E1	R769	1:H3	7-K3
R235	1:B4	2-P6	R333	1:F6	3-P4	R535	1:J5	5-F1	R771	1:H4	7-L3
R237	1:B7	2-Q7	R334	1:F3	3-C1	R540	1:H5	5-K4	R772	1:G4	7-M2
R238	1:B7	2-R7	R335	1:F6	3-R4	R545	1:K5	5-H0	R774	1:H4	7-M3
R239	1:B8	2-R6	R337	1:F5	3-R5	%R550	1:K5	5-K2	R775	1:H4	7-N2
R241	1:B8	2-Q6	R338	1:F9	3-B4	%R551	1:K5	5-L2	R777	1:H4	7-R2
R242	1:B7	2-Q5	R339	1:E7	3-B4	R555	1:K5	5-L3	R780	1:G2	7-P1
R244	1:C6	2-A5	R341	1:F7	3-C4	R560	1:K4	5-L5	R782	1:G3	7-P1
R245	1:D4	2-D4	R343	1:F7	3-D4	R609	1:L6	6-B8	R784	1:G3	7-P1
R247	1:D3	2-E4	R345	1:E7	3-D4	R613	1:L6	6-C8	R785	1:G3	7-Q1
R248	1:C3	2-E3	R347	1:F7	3-E3	R615	1:M5	6-F9	R786	1:G2	7-R1
R249	1:D4	2-F3	R349	1:E7	3-F3	R617	1:M5	6-J8	R787	1:G2	7-R2
R251	1:C4	2-G4	R350	1:F8	3-K9	R619	1:M6	6-L8	R790	1:G3	7-P0
R253	1:C6	2-J2	R351	1:E7	3-F2	R621	1:M6	6-L7	R791	1:G3	7-Q0
R254	1:C6	2-K3	R352	1:F3	3-B2	R625	1:N6	6-L7	R801	1:M2	8-D7
R255	1:C7	2-K2	R353	1:E7	3-G2	R629	1:M6	6-P6	R802	1:M2	8-D7
R256	1:D8	2-M3	R354	1:F3	3-C2	R633	1:M5	6-Q8	R808	1:L2	8-B4
R257	1:D8	2-N5	R355	1:E7	3-G3	R637	1:N5	6-K5	R809	1:L2	8-D5
R258	1:D8	2-N4	R357	1:E7	3-G4	R641	1:N5	6-L4	R810	1:L2	8-D6
R259	1:D5	2-P4	R359	1:E7	3-H3	R645	1:N5	6-L5	R811	1:L2	8-E6
R260	1:D8	2-N4	R360	1:F3	3-H3	R649	1:M5	6-M5	R812	1:L2	8-D5
R262	1:D8	2-N3	R361	1:F3	3-H3	R653	1:M5	6-Q4	R813	1:L2	8-D4
R263	1:C8	2-P3	R362	1:F3	3-J4	R657	1:M5	6-D1	R815	1:L2	8-F4
&R264	1:C8	2-P3	R363	1:F3	3-J4	R661	1:M5	6-E3	R816	1:L2	8-F4
&R265	1:C8	2-P3	R365	1:F3	3-J3	R665	1:M5	6-E2	R818	1:M2	8-F5
&R266	1:C8	2-P3	R367	1:F3	3-K4	R669	1:M5	6-E2	R819	1:M2	8-F5
R267	1:C8	2-R2	R368	1:F4	3-L3	R673	1:M5	6-E0	R821	1:M4	8-B3
R268	1:D2	2-C0	R369	1:F3	3-L4	R677	1:M4	6-F4	R822	1:M4	8-E3
R269	1:C2	2-C1	R370	1:F8	3-K8	R681	1:L5	6-L2	R824	1:L4	8-L8
R270	1:C2	2-D1	R371	1:E8	3-N7	R685	1:L5	6-N2	R825	1:L4	8-L8
R271	1:C3	2-E1	R372	1:E8	3-N7	R689	1:L6	6-Q3	R826	1:L4	8-L8
R272	1:C4	2-F2	R373	1:E8	3-N7	R693	1:L6	6-Q1	R827	1:L4	8-L7
R273	1:B5	2-G2	R374	1:E9	3-N6	R696	1:M6	6-Q1	R828	1:L4	8-L7
R274	1:C4	2-G1	R376	1:F3	3-L2	R701	1:K4	7-A9	R829	1:L4	8-P9
R275	1:C4	2-H0	R381	1:F4	3-H1	R702	1:K4	7-C9	R830	1:L3	8-P9
R277	1:B5	2-J1	R382	1:F4	3-J1	R703	1:J3	7-C8	R831	1:L3	8-P9
R278	1:B5	2-J0	R383	1:F4	3-J0	=R705	1:K3	7-A7	R832	1:L3	8-P8
R279	1:B5	2-K0	R384	1:F4	3-J1	R706	1:J3	7-B6	R833	1:L3	8-P8
R280	1:B5	2-K0	R385	1:E4	3-L1	R708	1:H3	7-C7	R835	1:L3	8-P8
R282	1:D7	2-K1	R386	1:F4	3-L2	R710	1:H2	7-E7	R836	1:L3	8-P8
R283	1:D7	2-L1	R387	1:E4	3-M2	R711	1:J2	7-B6	R837	1:L3	8-P7
R284	1:D7	2-L0	R389	1:E4	3-M2	R712	1:J3	7-D9	R840	1:L3	8-P7
R285	1:C8	2-M0	R390	1:E4	3-M2	R713	1:J4	7-F8	R841	1:L3	8-P7
R286	1:C7	2-M0	R391	1:E4	3-M2	%R715	1:K4	7-H6	R842	1:L3	8-P6
R287	1:D9	2-M0	R392	1:E4	3-M2	R717	1:J4	7-H7	R843	1:L3	8-P6
R288	1:C6	2-M2	R393	1:F4	3-N2	R718	1:J4	7-H7	R845	1:M4	8-P5
R289	1:D9	2-M0	R394	1:F4	3-P2	R719	1:J4	7-J6	R846	1:K2	8-P4
R290	1:C8	2-N2	#R395	1:E5	3-N1	R720	1:J3	7-K7	R847	1:K2	8-P4
R291	1:C8	2-N1	#R396	1:E5	3-N2	R721	1:J3	7-K9	R848	1:L2	8-J4
R292	1:D8	2-Q2	#R397	1:E5	3-N1	R722	1:J3	7-K8	R849	1:M4	8-P3
R293	1:D9	2-Q2	R399	1:E6	3-P1	R723	1:J3	7-M7	R850	1:K2	8-P4
R294	1:D9	2-Q1	#R410	1:H8	4-B4	R725	1:J4	7-N7	R853	1:M4	8-N3
R295	1:D8	2-R1	#R420	1:H8	4-B3	%R726	1:J3	7-N6	R854	1:M4	8-N3
R296	1:D6	2-P0	#R430	1:H8	4-B3	R727	1:H3	7-N9	R855	1:M2	8-B0
R297	1:D7	2-P1	#R440	1:H8	4-C3	R728	1:H3	7-N8	R859	1:N2	8-C1
%R298	1:D7	2-Q0	R450	1:G7	4-D3	R742	1:H2	7-B4	R861	1:N2	8-D1
R299	1:C7	2-R0	R460	1:M8	4-P5	R743	1:H2	7-C5	R863	1:N3	8-E1
R300	1:F8	3-B9	R470	2:N8	4-P5	R744	1:G2	7-D4	R865	1:N4	8-E0
R301	1:E9	3-C8	R480	2:M8	4-N4	R746	1:H3	7-E4	R867	1:N3	8-E1
R302	1:F9	3-B7	R481	1:J9	4-P7	R747	1:H3	7-E5	R871	1:N3	8-G2
R303	1:E8	3-C7	R490	1:N7	4-P3	R748	1:J2	7-A1	R872	1:M4	8-H1
R304	1:E8	3-E9	R500	1:J4	5-C6	R749	1:J2	7-B1	R873	1:N3	8-G1
R305	1:E8	3-E7	R501	1:J6	5-J8	R750	1:H4	7-Q7	R874	1:N3	8-H0
R306	1:E8	3-B6	R502	1:J6	5-J8	R752	1:G4	7-F5	R875	1:N3	8-G0
R307	1:E8	3-B6	R503	1:J6	5-K8	R753	1:G4	7-F3	R876	1:N3	8-H0
R309	1:E8	3-C6	R504	1:K6	5-K9	R754	1:G3	7-F3	R877	1:M2	8-K2
R311	1:E7	3-D6	R505	1:K6	5-L8	R756	1:G3	7-G5	R879	1:N2	8-L3
R315	1:E7	3-D6	R510	1:K6	5-L8	R757	1:G4	7-G4			
%R317	1:F7	3-D5	R514	1:K6	5-N6	R758	1:H3	7-H4	RV210	1:B7	2-F9
R319	1:F7	3-E5	R515	1:H6	5-H5	R759	1:H3	7-H4	RV220	1:A4	2-M6
R321	1:F7	3-G5	#R517	1:G5	5-F2	R760	1:H3	7-K4	RV310	1:E7	3-D6
R323	1:F8	3-G7	#R518	1:G5	5-F3	R762	1:H3	7-K4	RV320	1:E8	3-B4
R324	1:F7	3-F5	#R519	1:G5	5-G2	R763	1:H4	7-L4	RV330	1:F7	3-E5
R325	1:F8	3-G5	R520	1:K6	5-C1	R765	1:H3	7-H2	RV805	1:N4	8-F1
R327	1:F8	3-H7	R523	1:J5	5-D1	R766	1:G3	7-J3			

<u>Device</u>	<u>PCB</u>	<u>Circuit</u>	<u>Device</u>	<u>PCB</u>	<u>Circuit</u>	<u>Device</u>	<u>PCB</u>	<u>Circuit</u>	<u>Device</u>	<u>PCB</u>	<u>Circuit</u>
SK200	1:D5	2-F0									
SK205	1:B5	2-A5									
SK310	1:E6	3-R2									
SK410	1:G8	4-A4									
SK501	1:G6	5-E7									
SK502	1:G6	5-E6									
SK503	1:G6	5-E5									
SK504	1:G5	5-E4									
SK505	1:G5	5-E3									
SK513	1:H5	5-H3									
SK522	1:H6	5-L6									
SK531	1:K6	5-P7									
SK532	1:K5	5-P6									
SK533	1:K5	5-P5									
SK534	1:K5	5-P4									
SK535	1:K5	5-P3									
=SK710	1:K3	7-A7									
SK805	1:K3	8-Q9									
SK805	1:K3	8-Q7									
SK805	1:K3	8-Q6									
SK805	1:K3	8-Q9									
SK805	1:K3	8-Q6									
SK805	1:K3	8-Q9									
SK805	1:K3	8-Q7									
SK805	1:K3	8-Q8									
SK805	1:K3	8-Q6									
SK805	1:K3	8-Q5									
SK805	1:K3	8-Q7									
SK805	1:K3	8-Q8									
SK805	1:K3	8-Q7									
SK805	1:K3	8-Q8									
SK805	1:K3	8-Q6									
SK805	1:K3	8-Q8									
SK810	1:M3	8-H5									
SL201	2:D1	2-B9									
SL202	2:D1	2-B8									
SL203	2:D2	2-B1									
SL204	2:D2	2-B1									
SL501	2:J5	5-G1									
SL810	1:M2	8-C7									
SW230	1:B8	2-B4									
T210	1:B2	2-C8									
T610	1:L5	6-N2									
TP206	1:C5	2-H7									
TP302	1:D9	3-B7									
TP305	1:E3	3-H3									
TP306	1:F9	3-B8									
TP307	1:F8	3-B9									
TP310	1:D7	3-G2									
TP312	1:F9	3-A5									
TP401	1:M7	4-G7									
TP601	1:N5	6-M9									
TP602	1:L6	6-R9									
TP603	1:L5	6-J2									
TP604	1:L5	6-M6									
TP607	1:L4	6-J9									
TP710	1:H4	7-H5									
TP715	1:J2	7-C6									

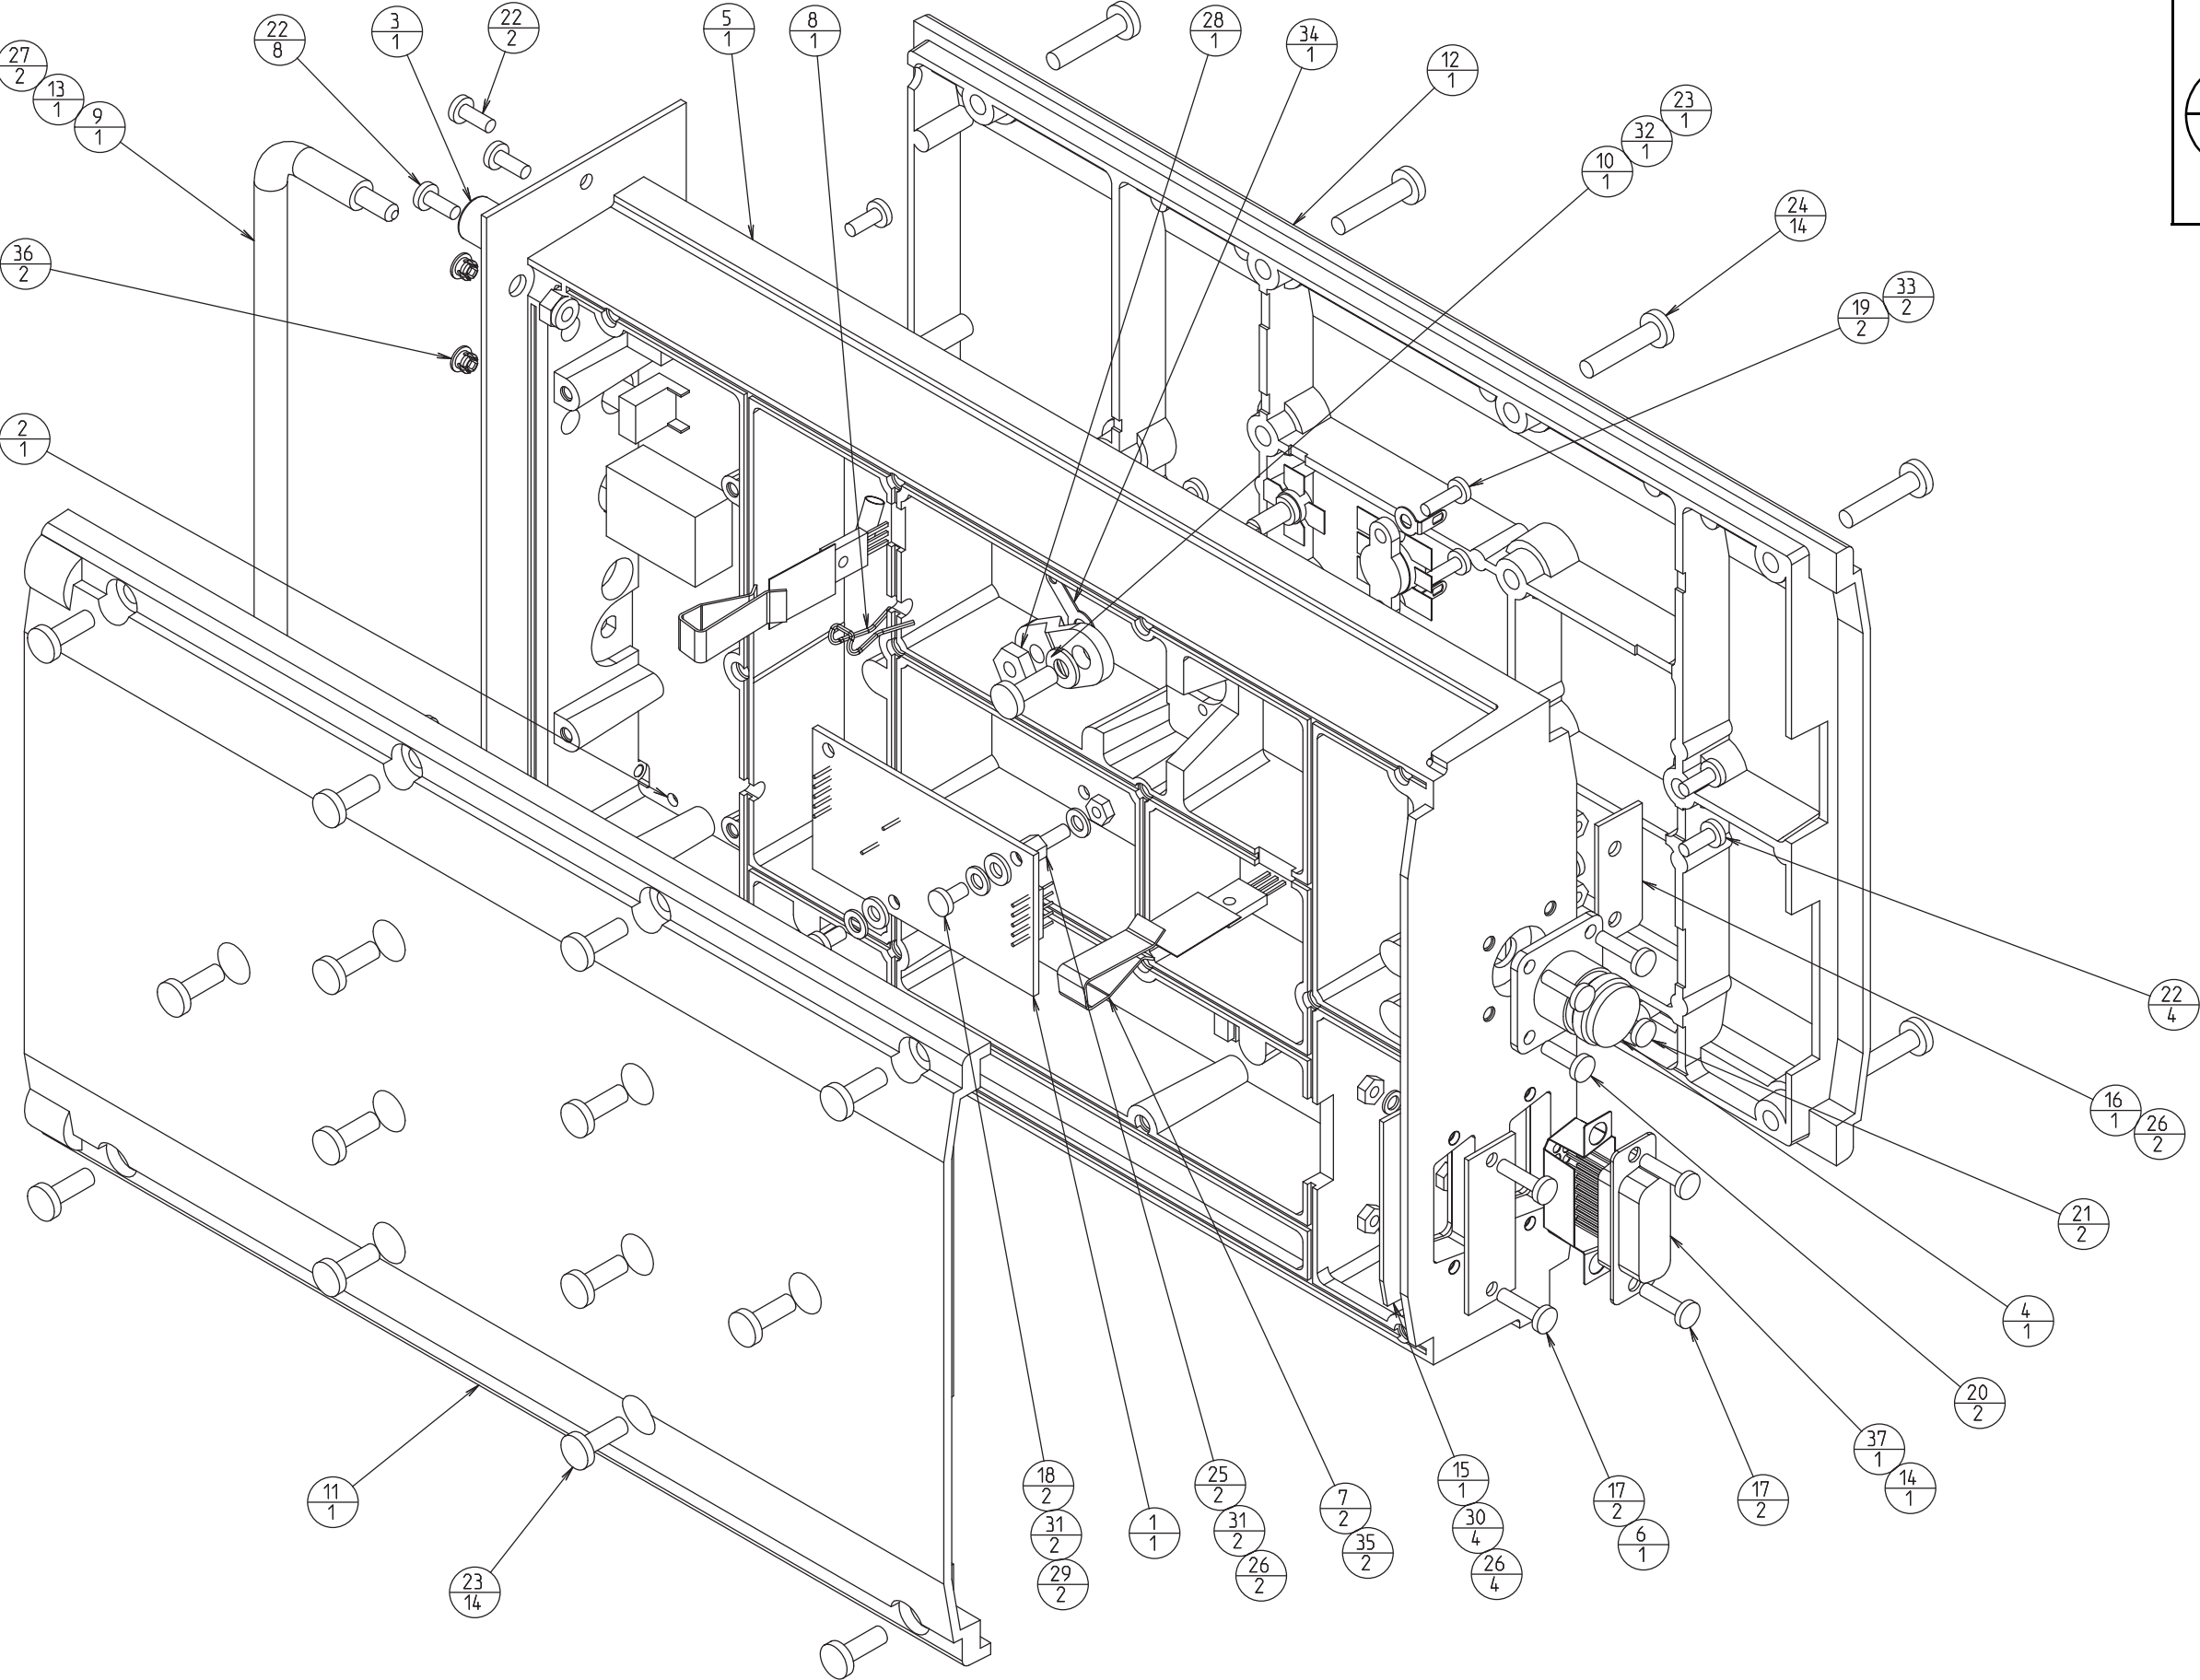


33
2


Key

The upper number is the component identification number which appears in the "Legend" column of the Mechanical & Miscellaneous Parts on the facing page.

The lower number indicates how many of this component are used in this location or function.




31/09/98

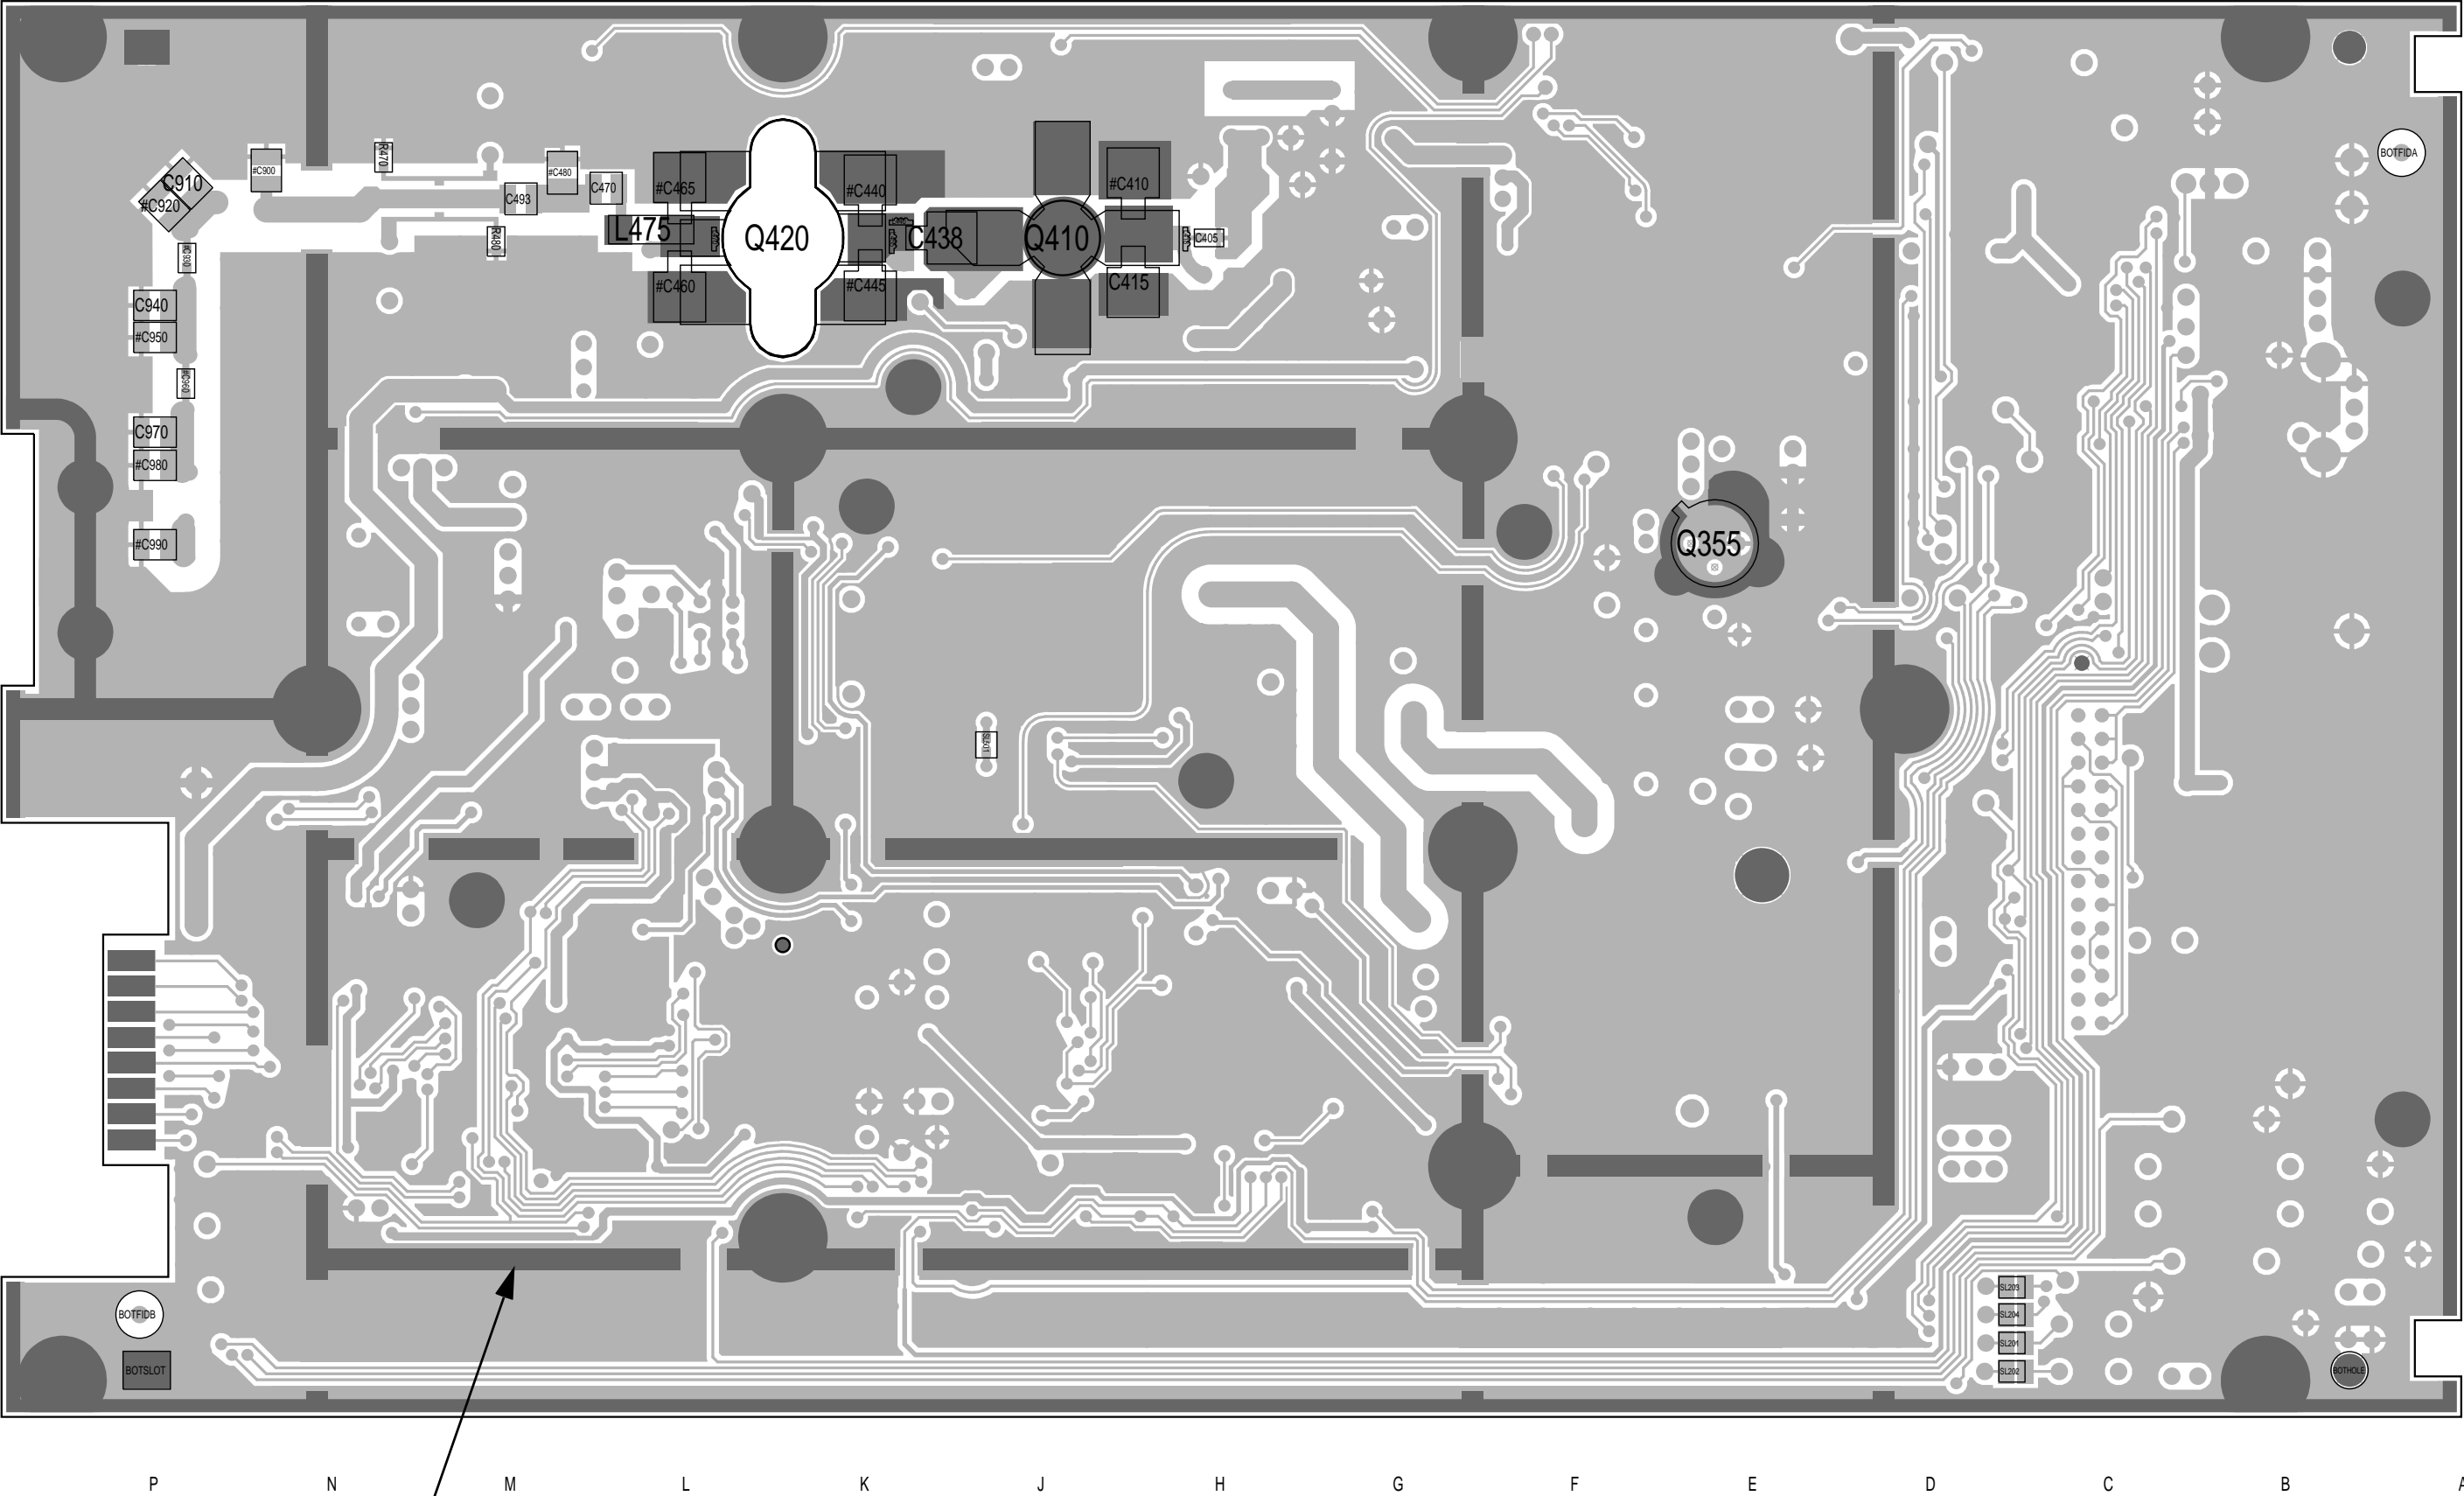


The darker shading shows the footprint of the bottom cover.

T856 PCB Layout - Bottom Side
220-01397-01

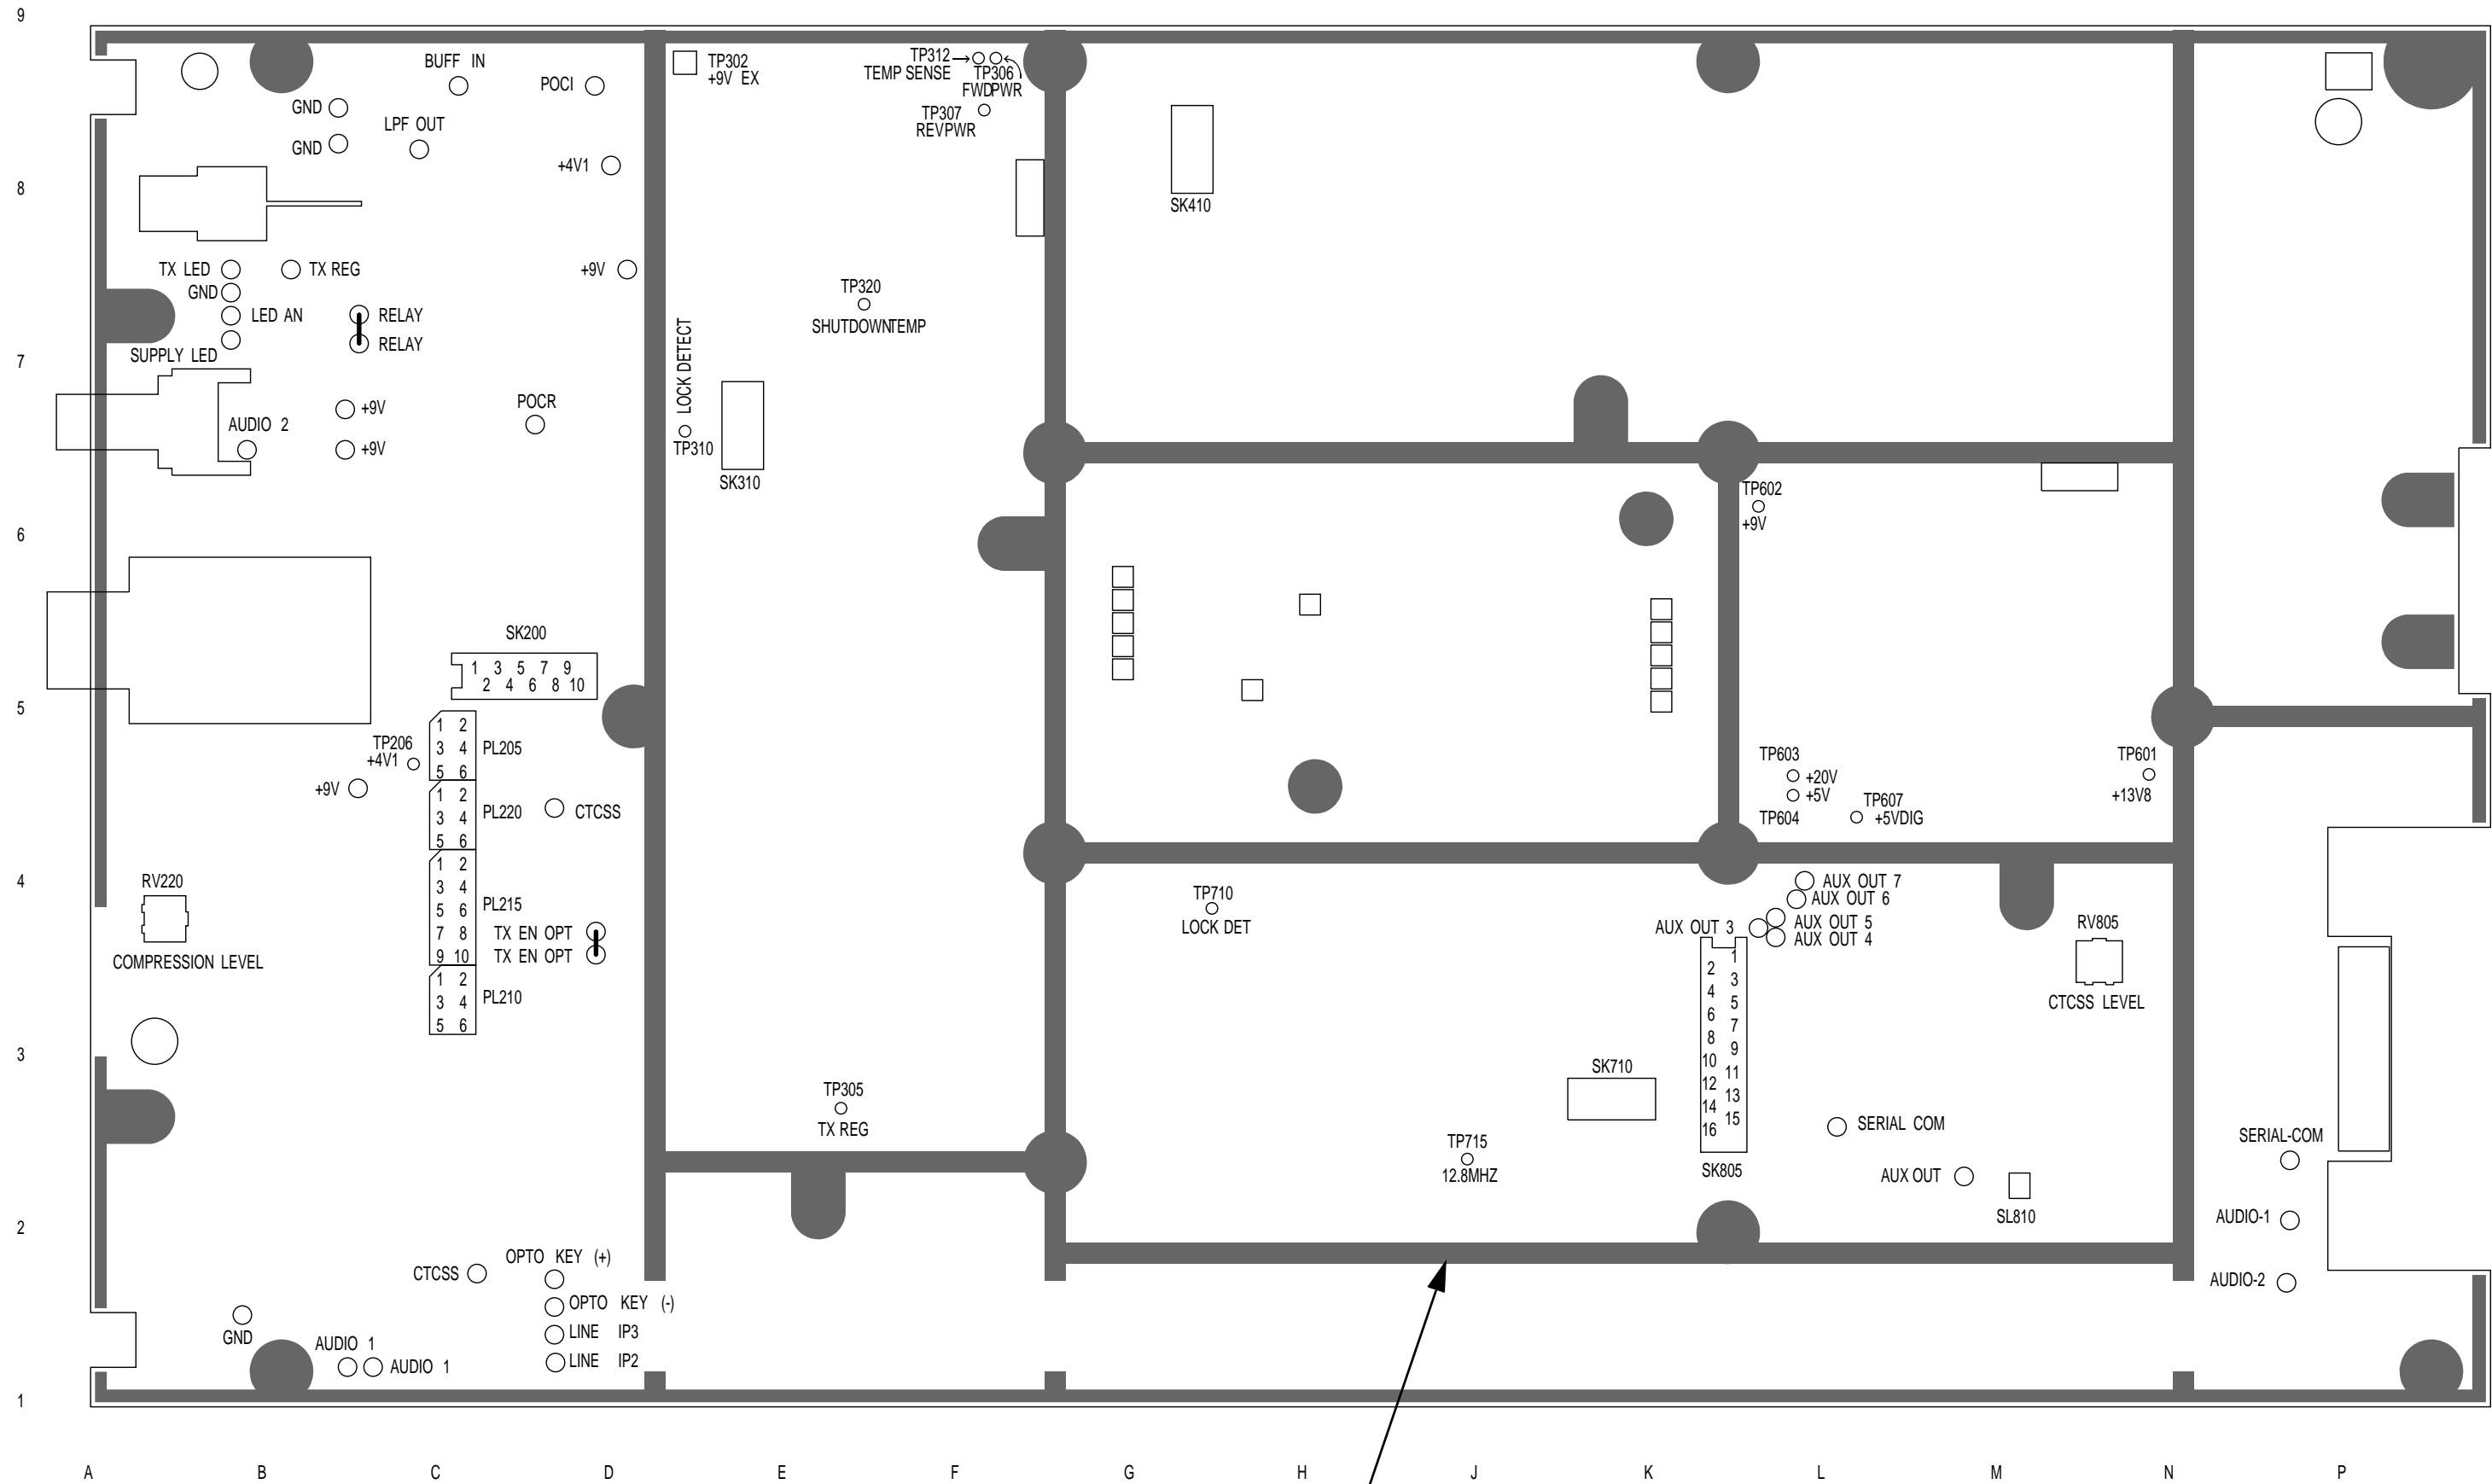



The darker shading shows the outline of the chassis.

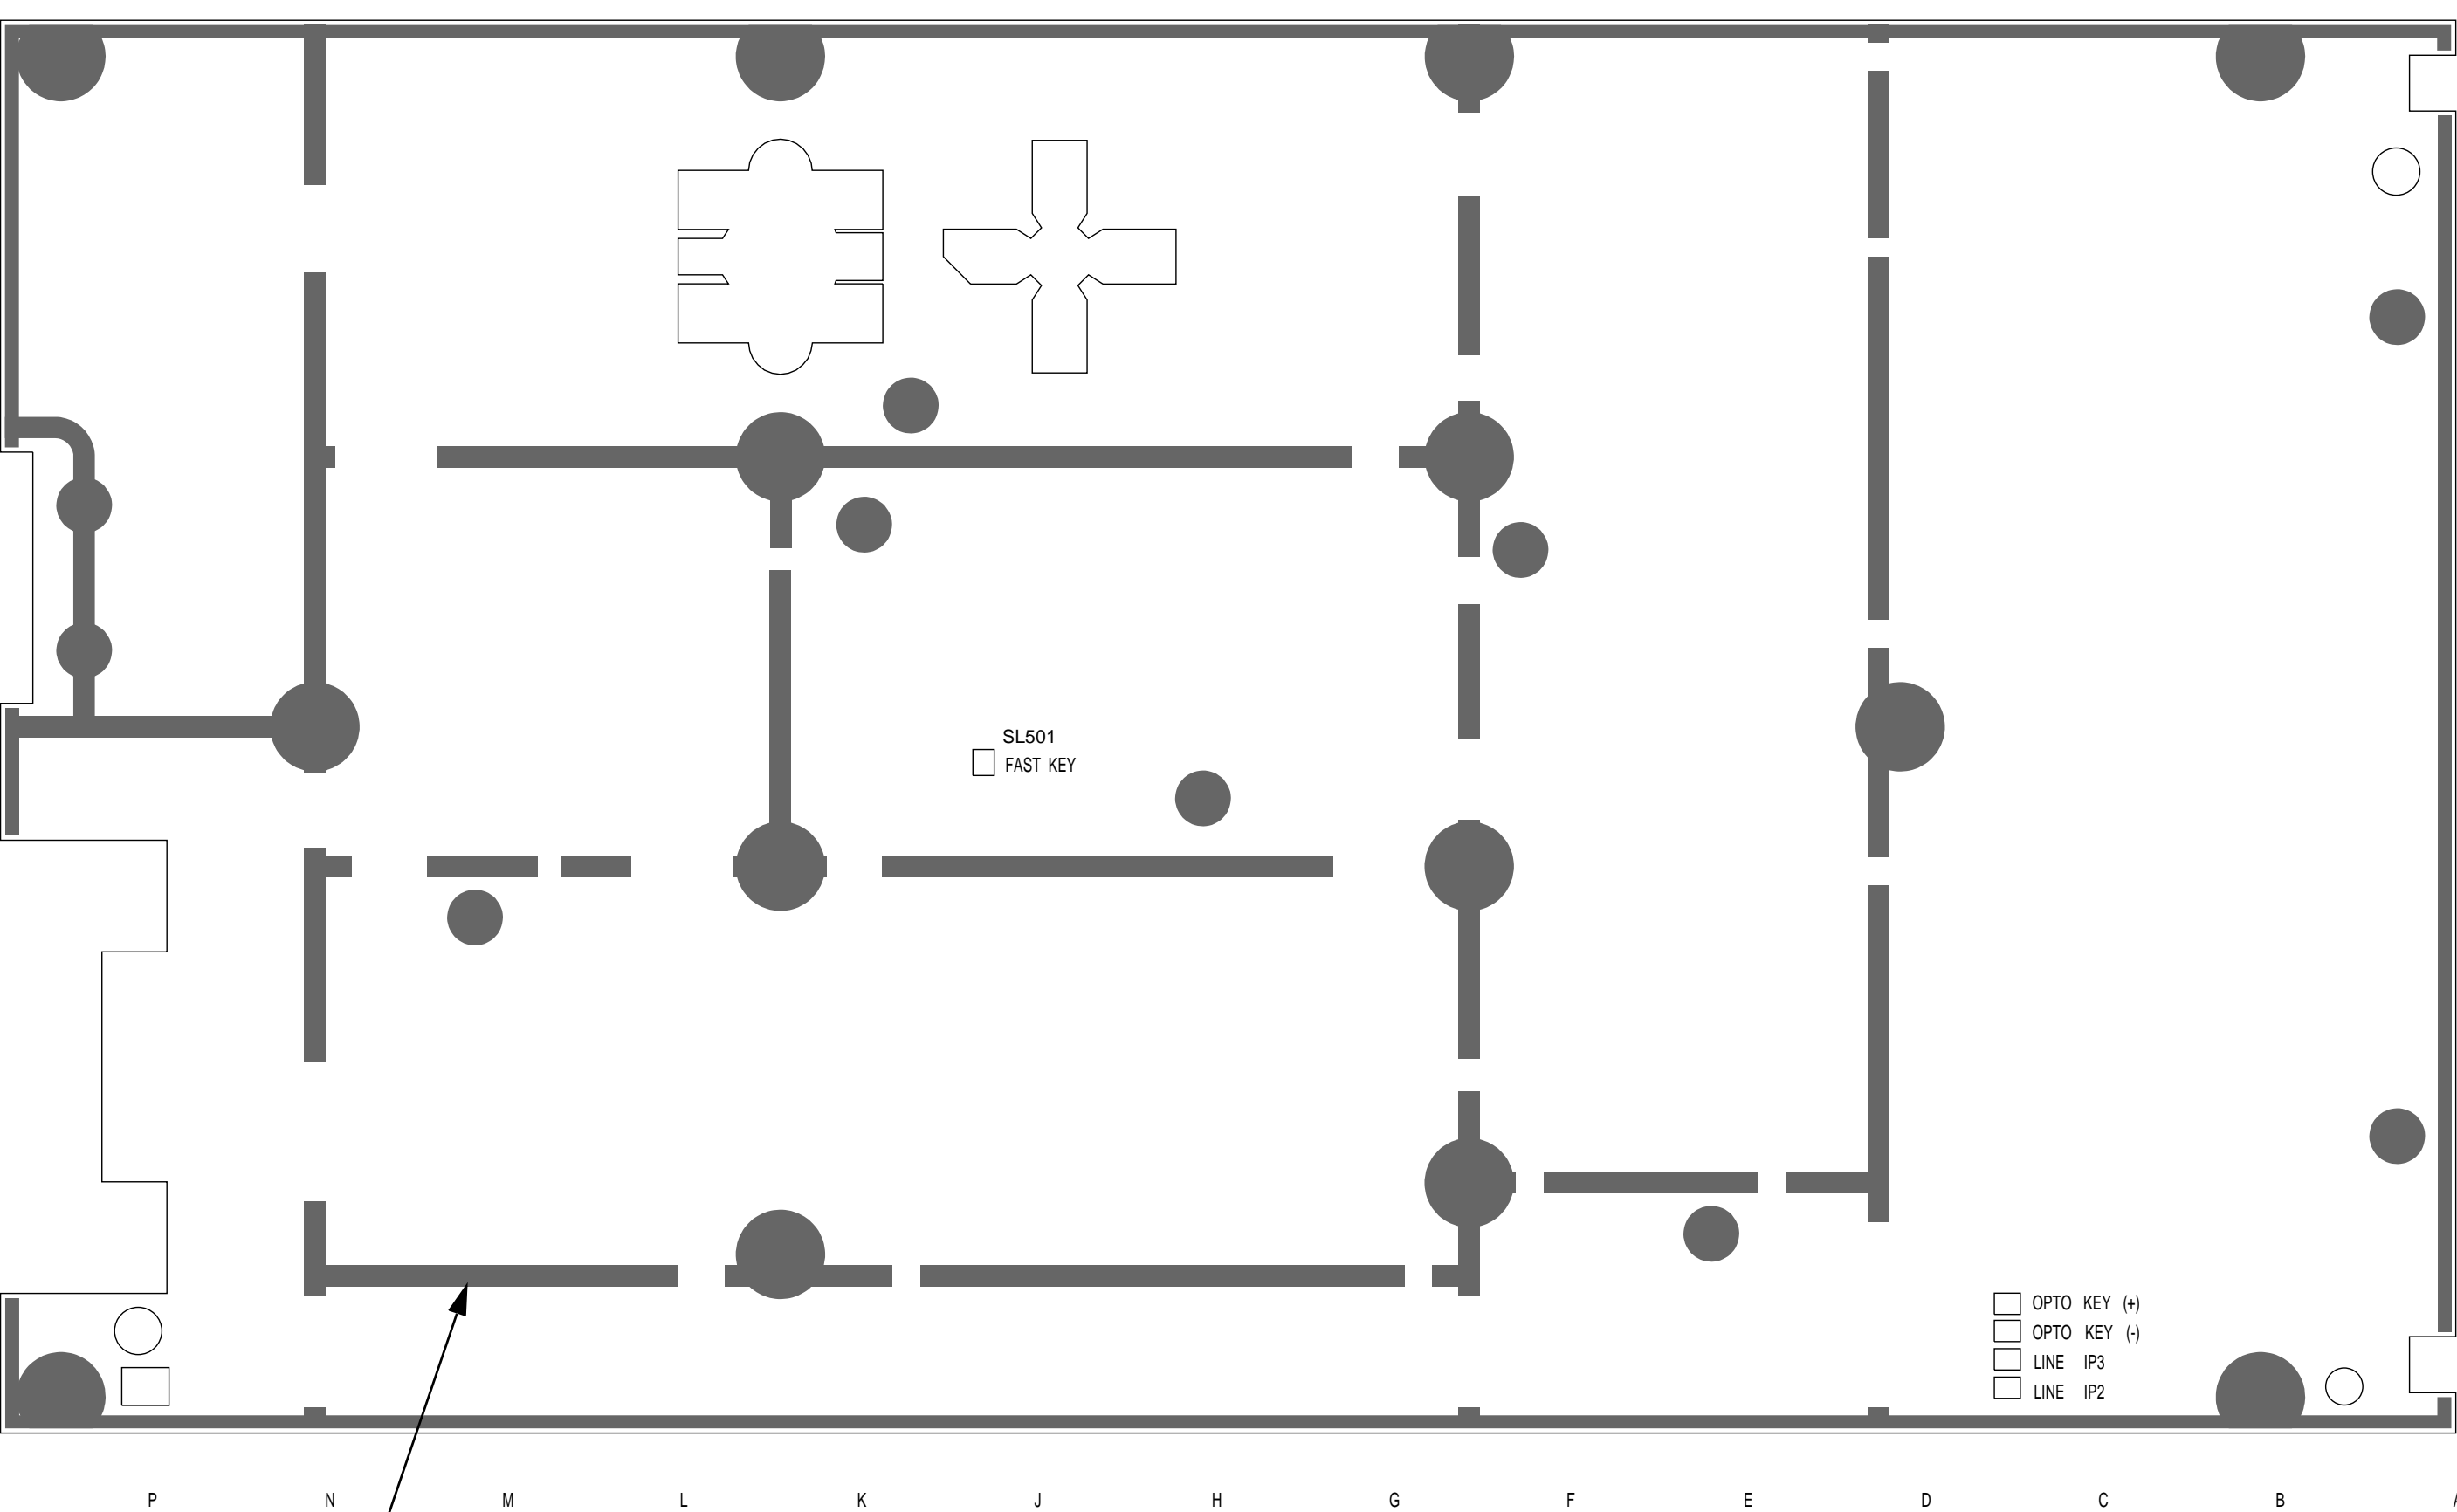



The darker shading shows the footprint of the bottom cover.


T856 Test Points & Options Connections - Bottom Side
220-01397-01

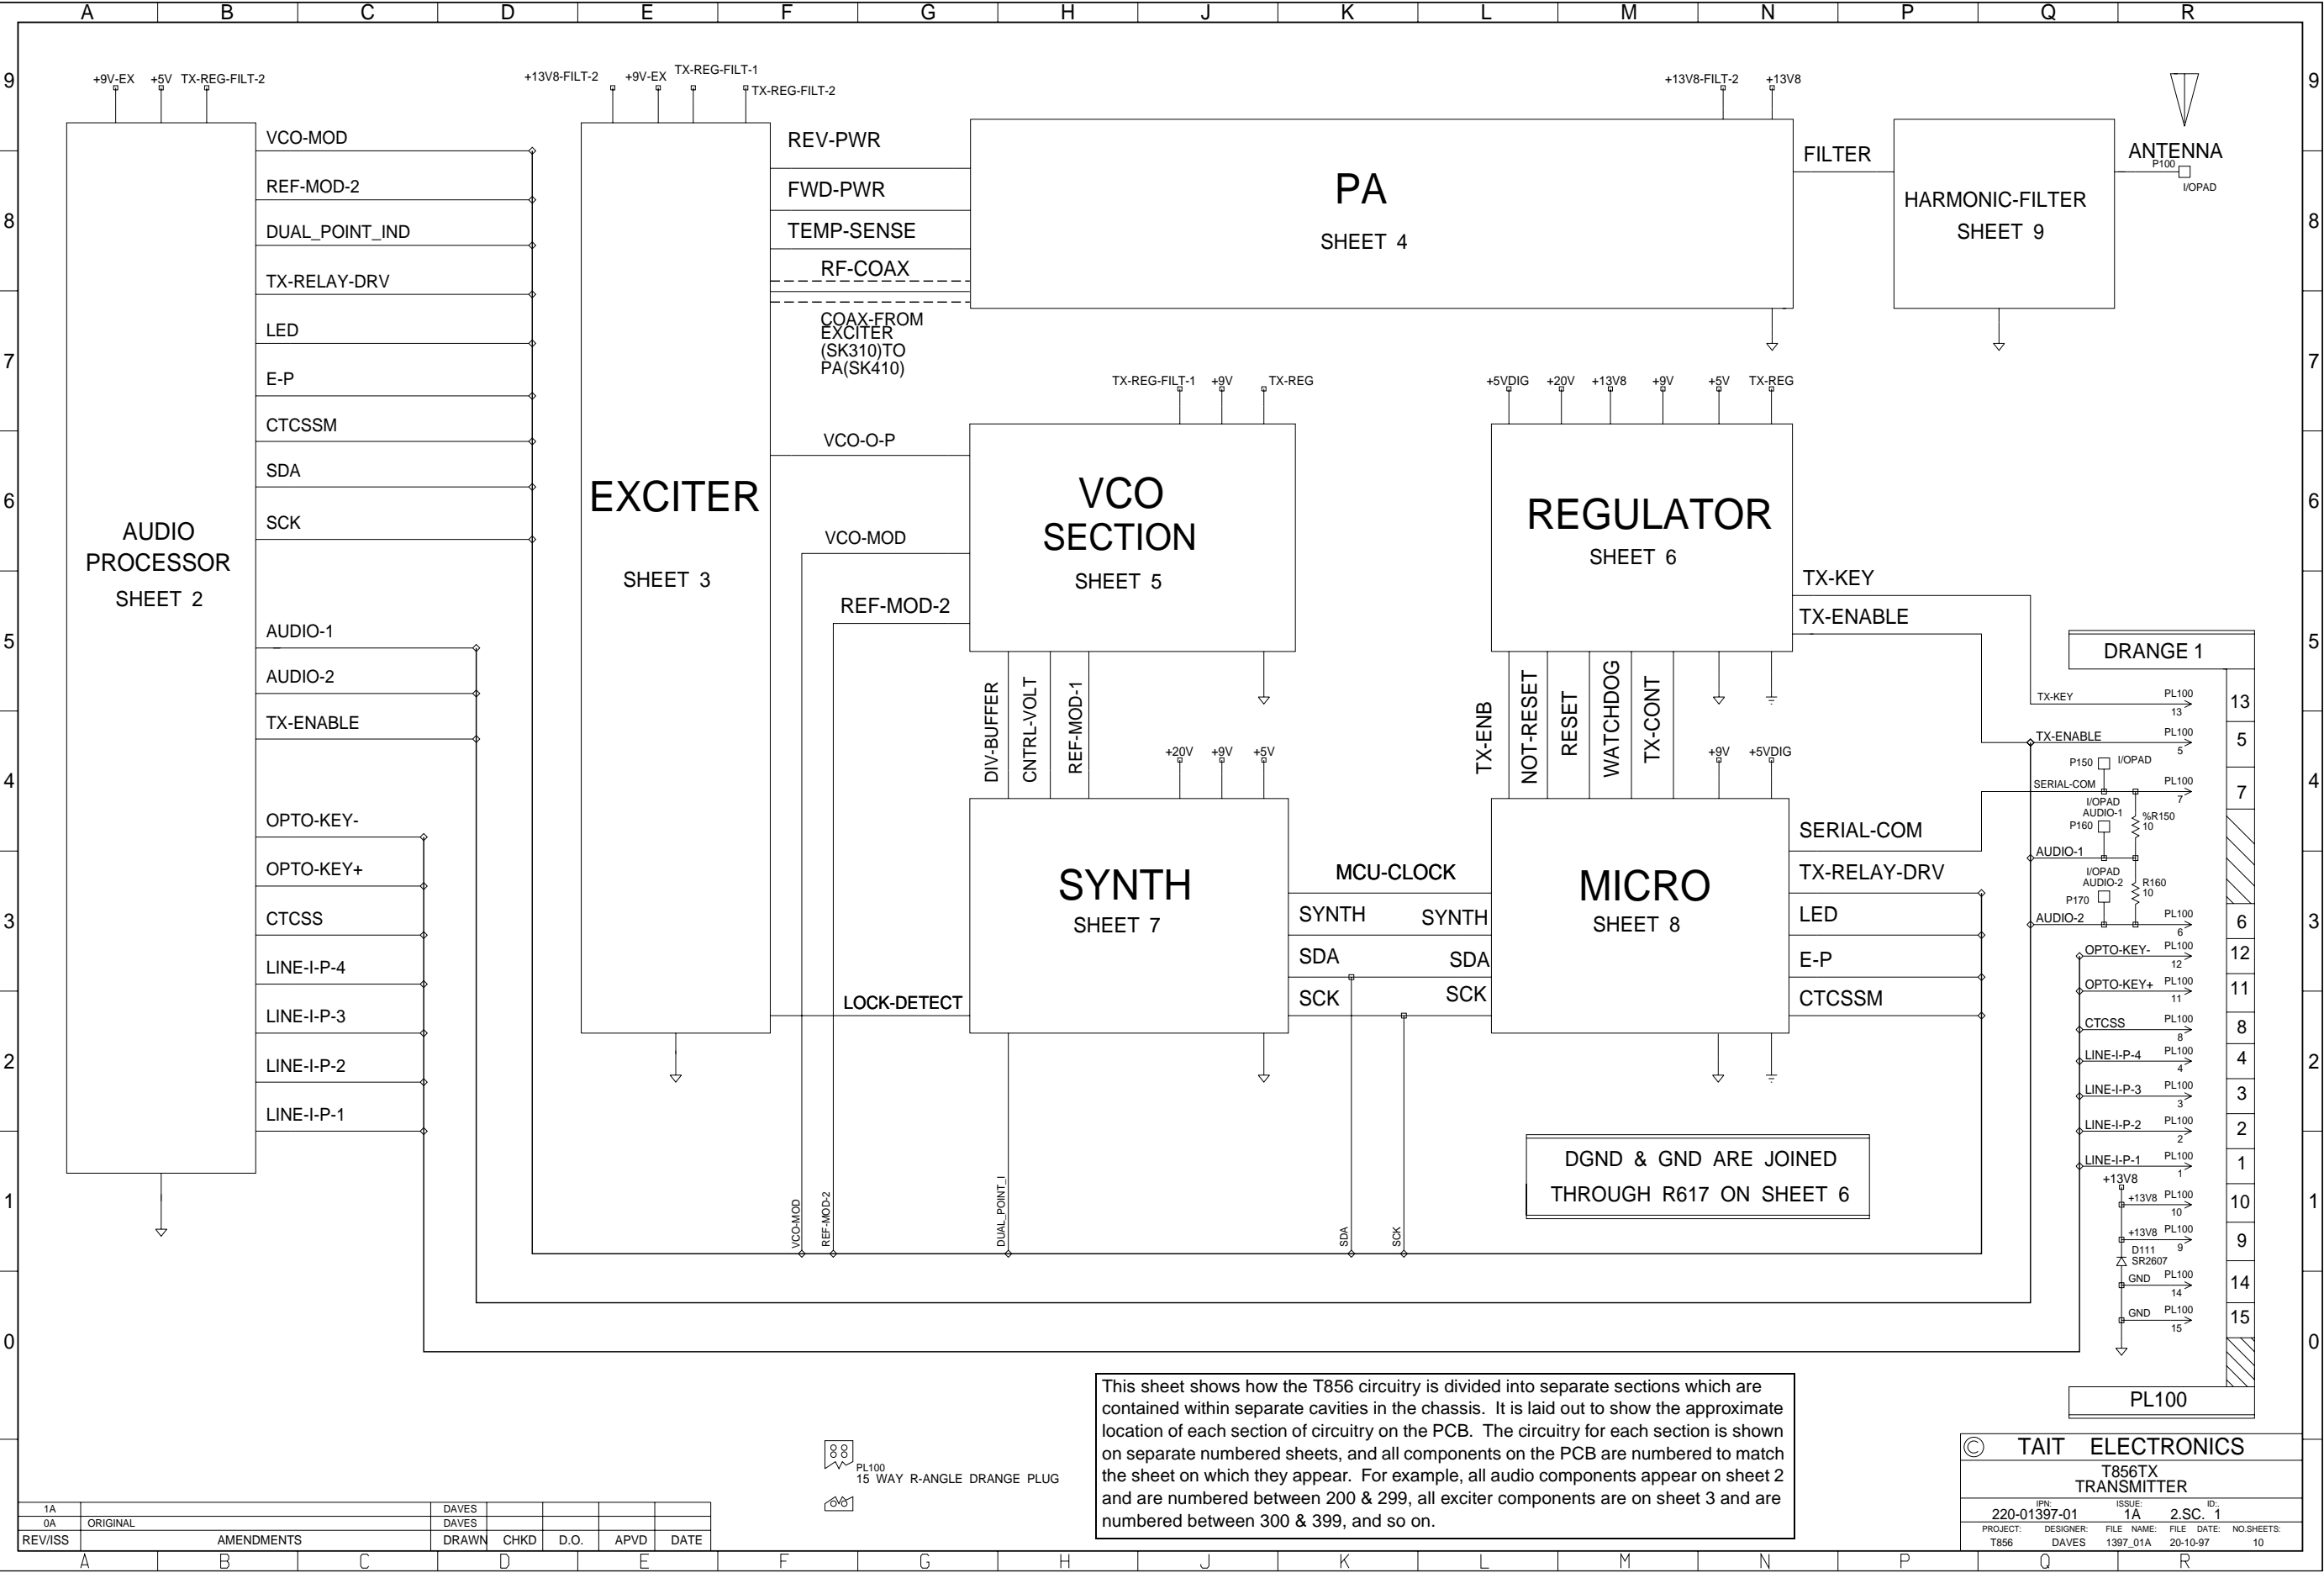


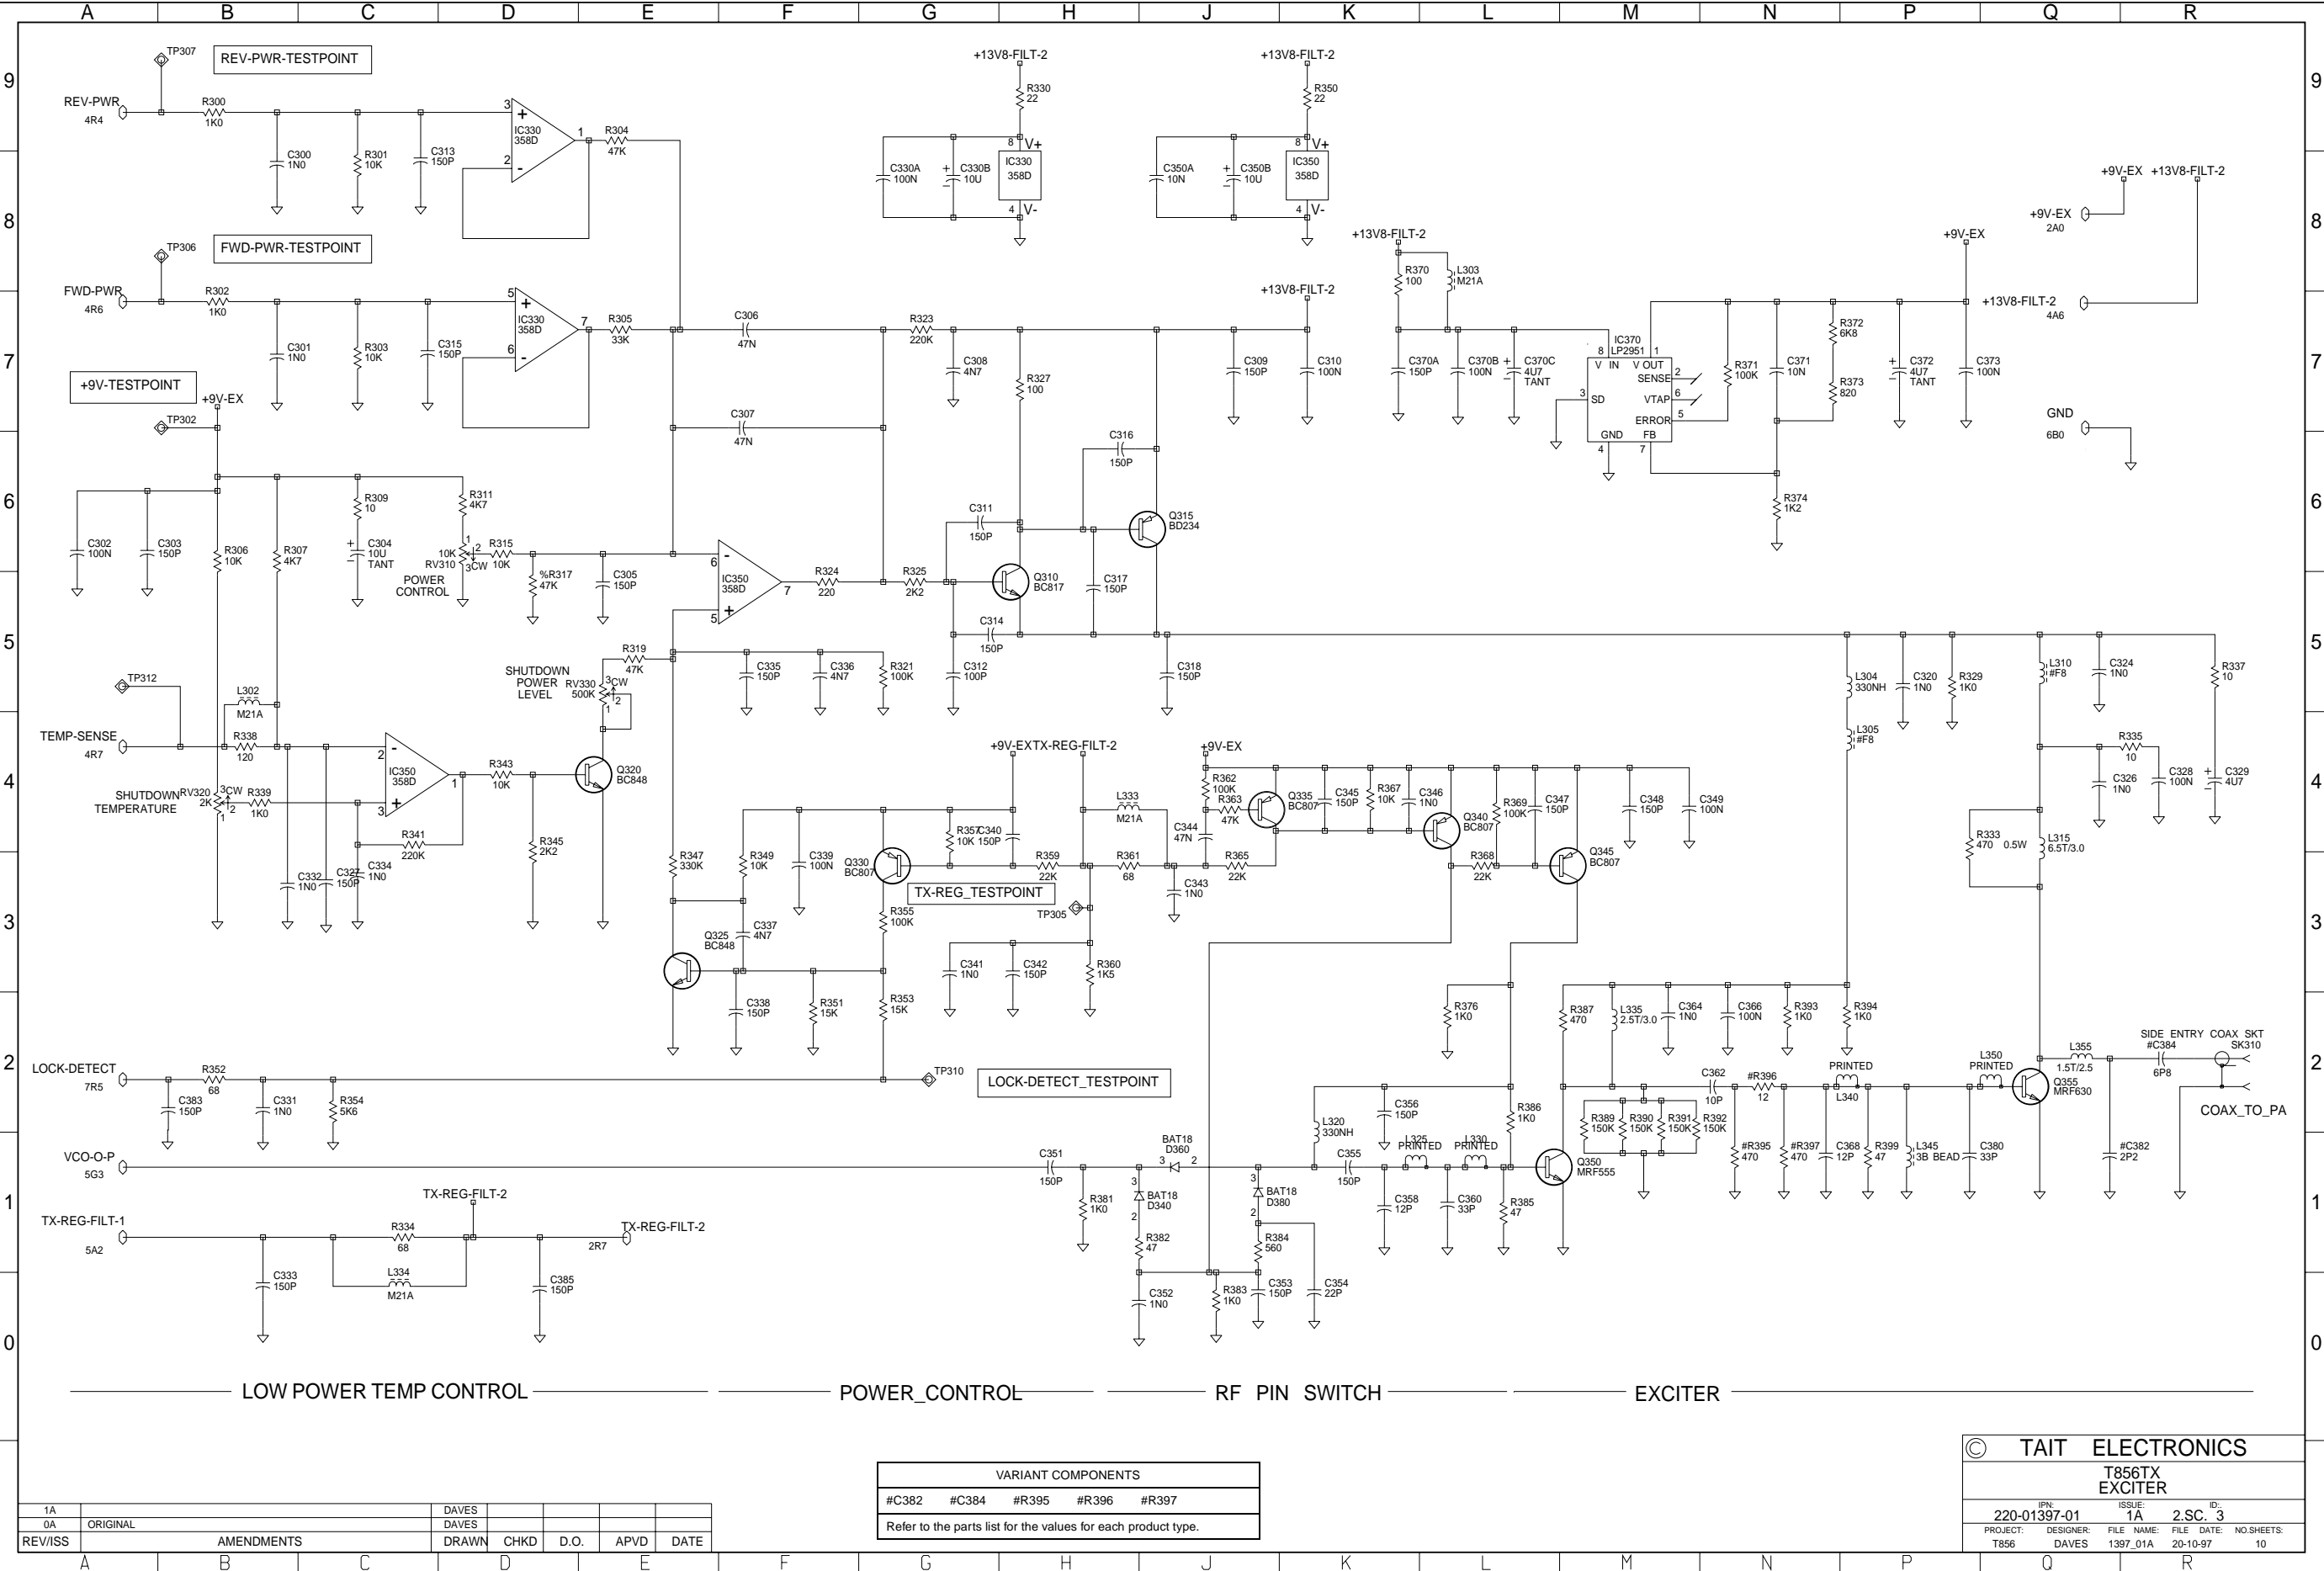


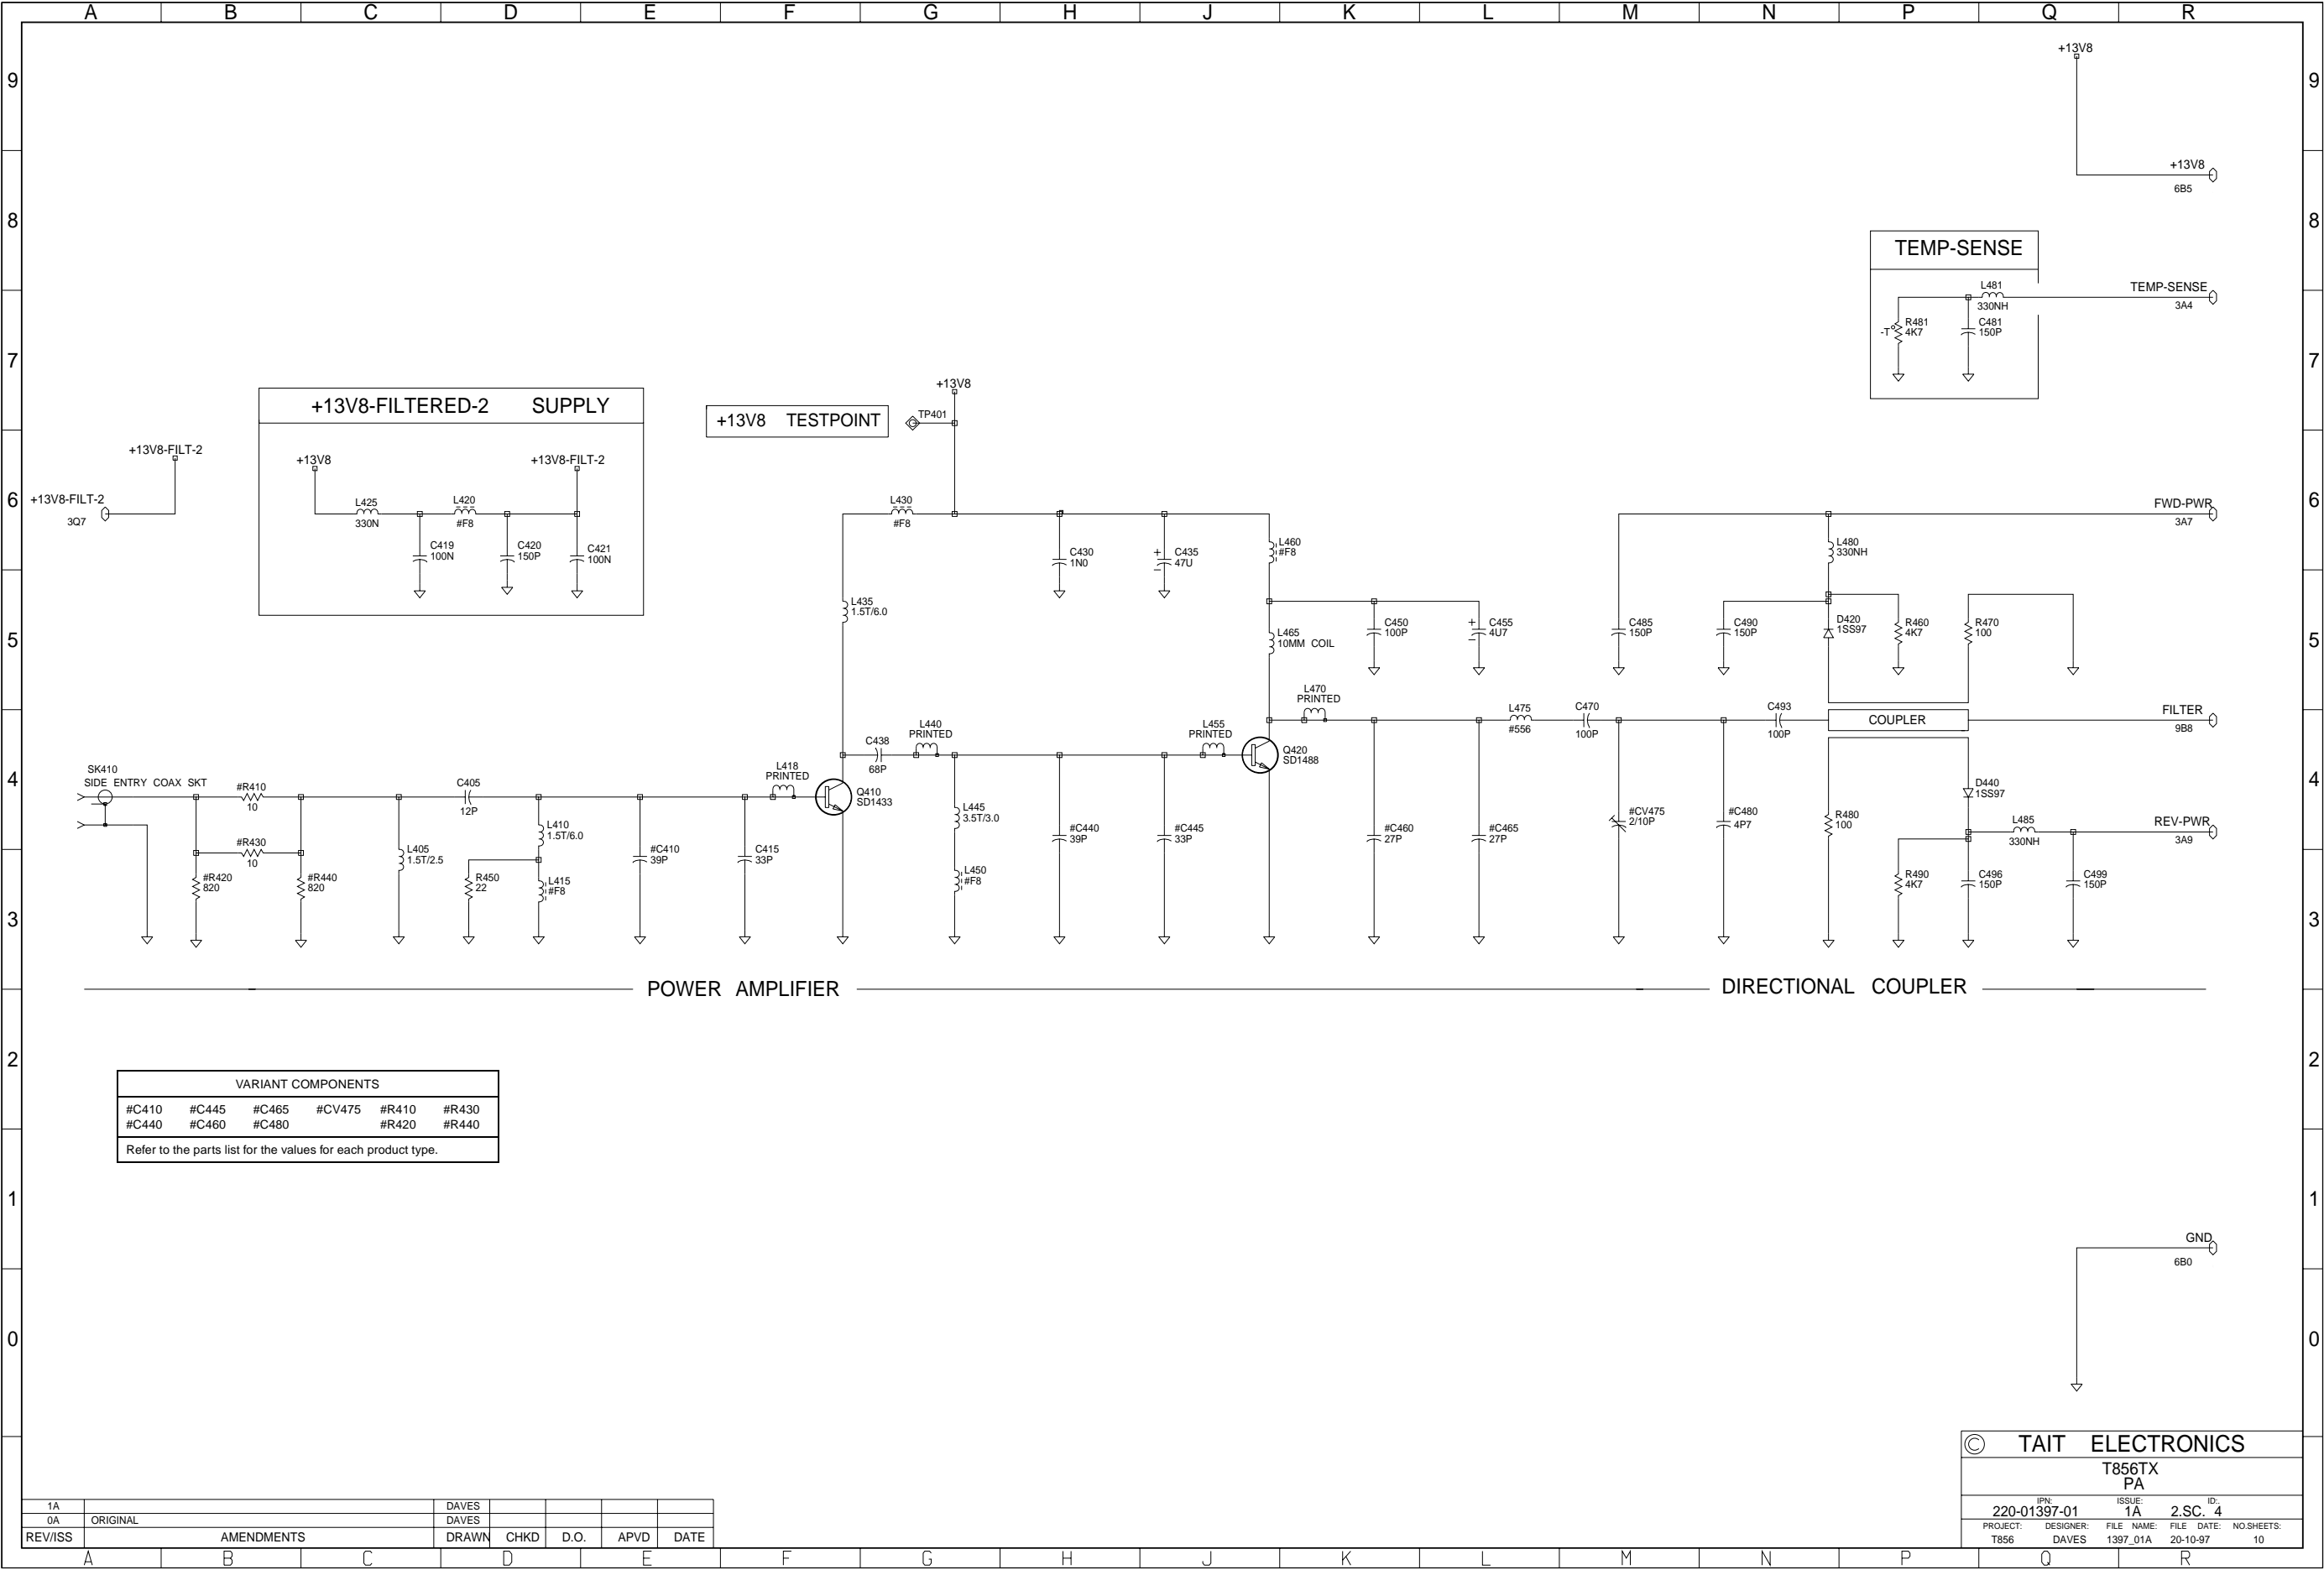


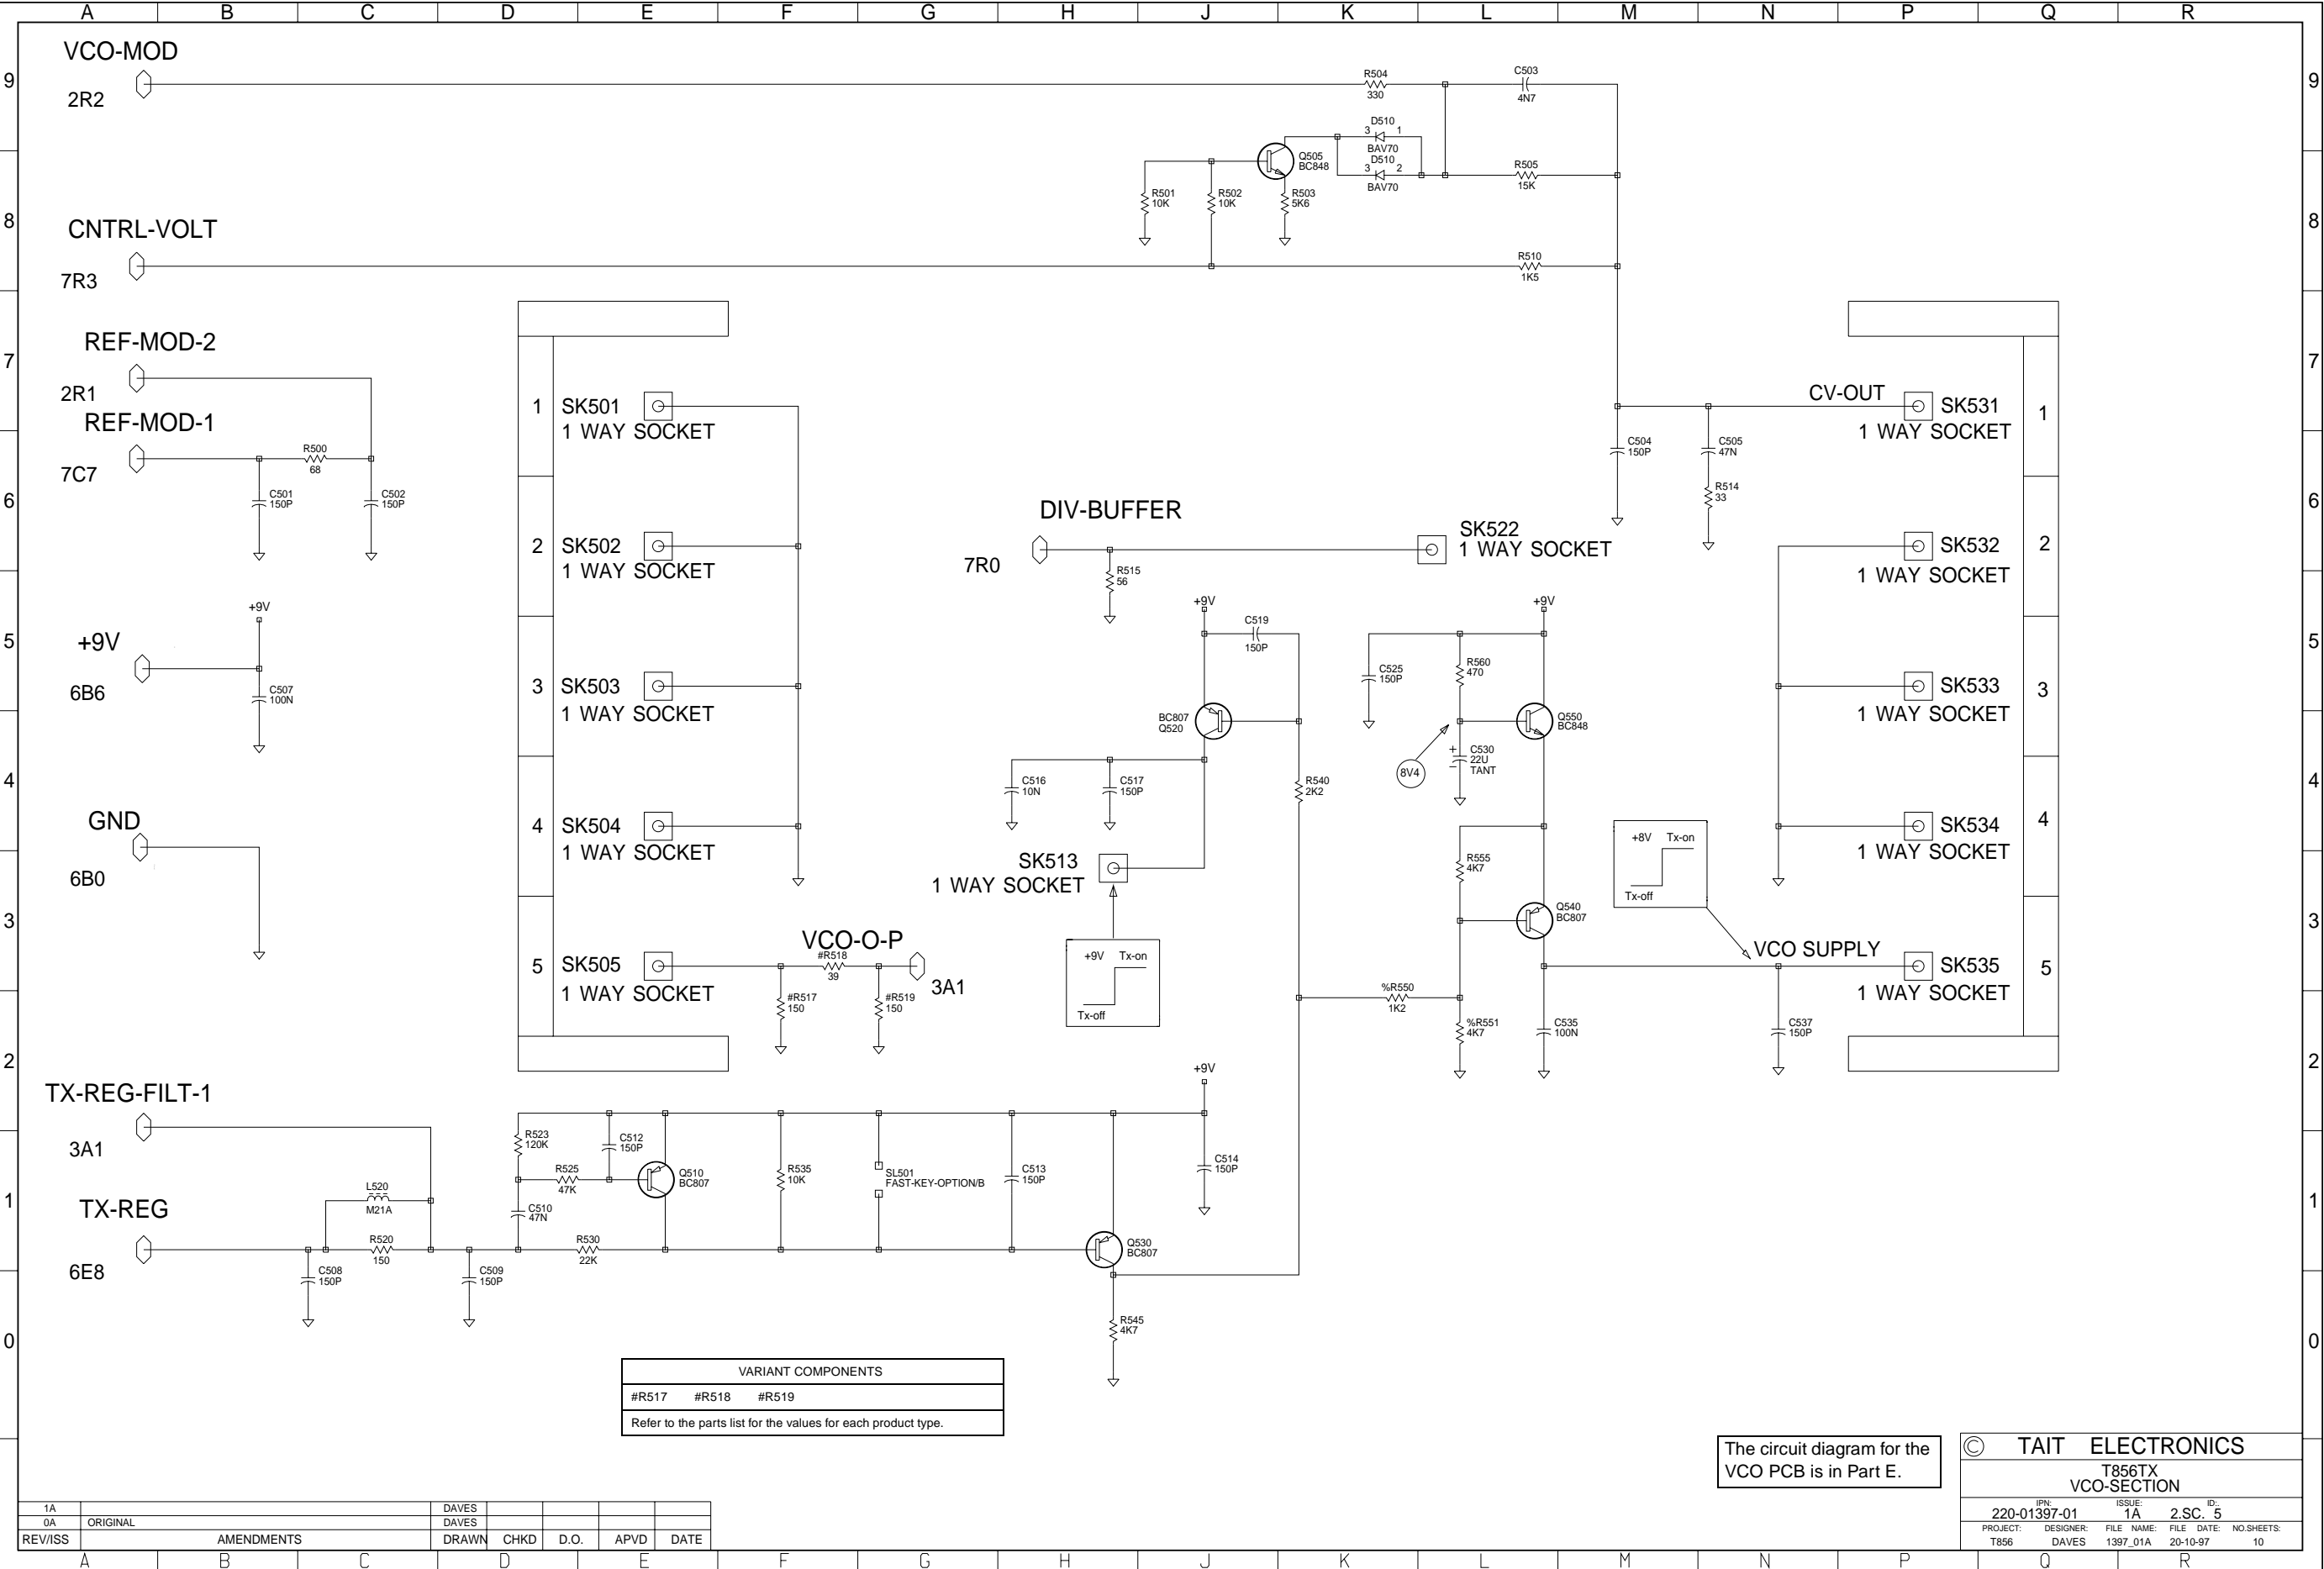

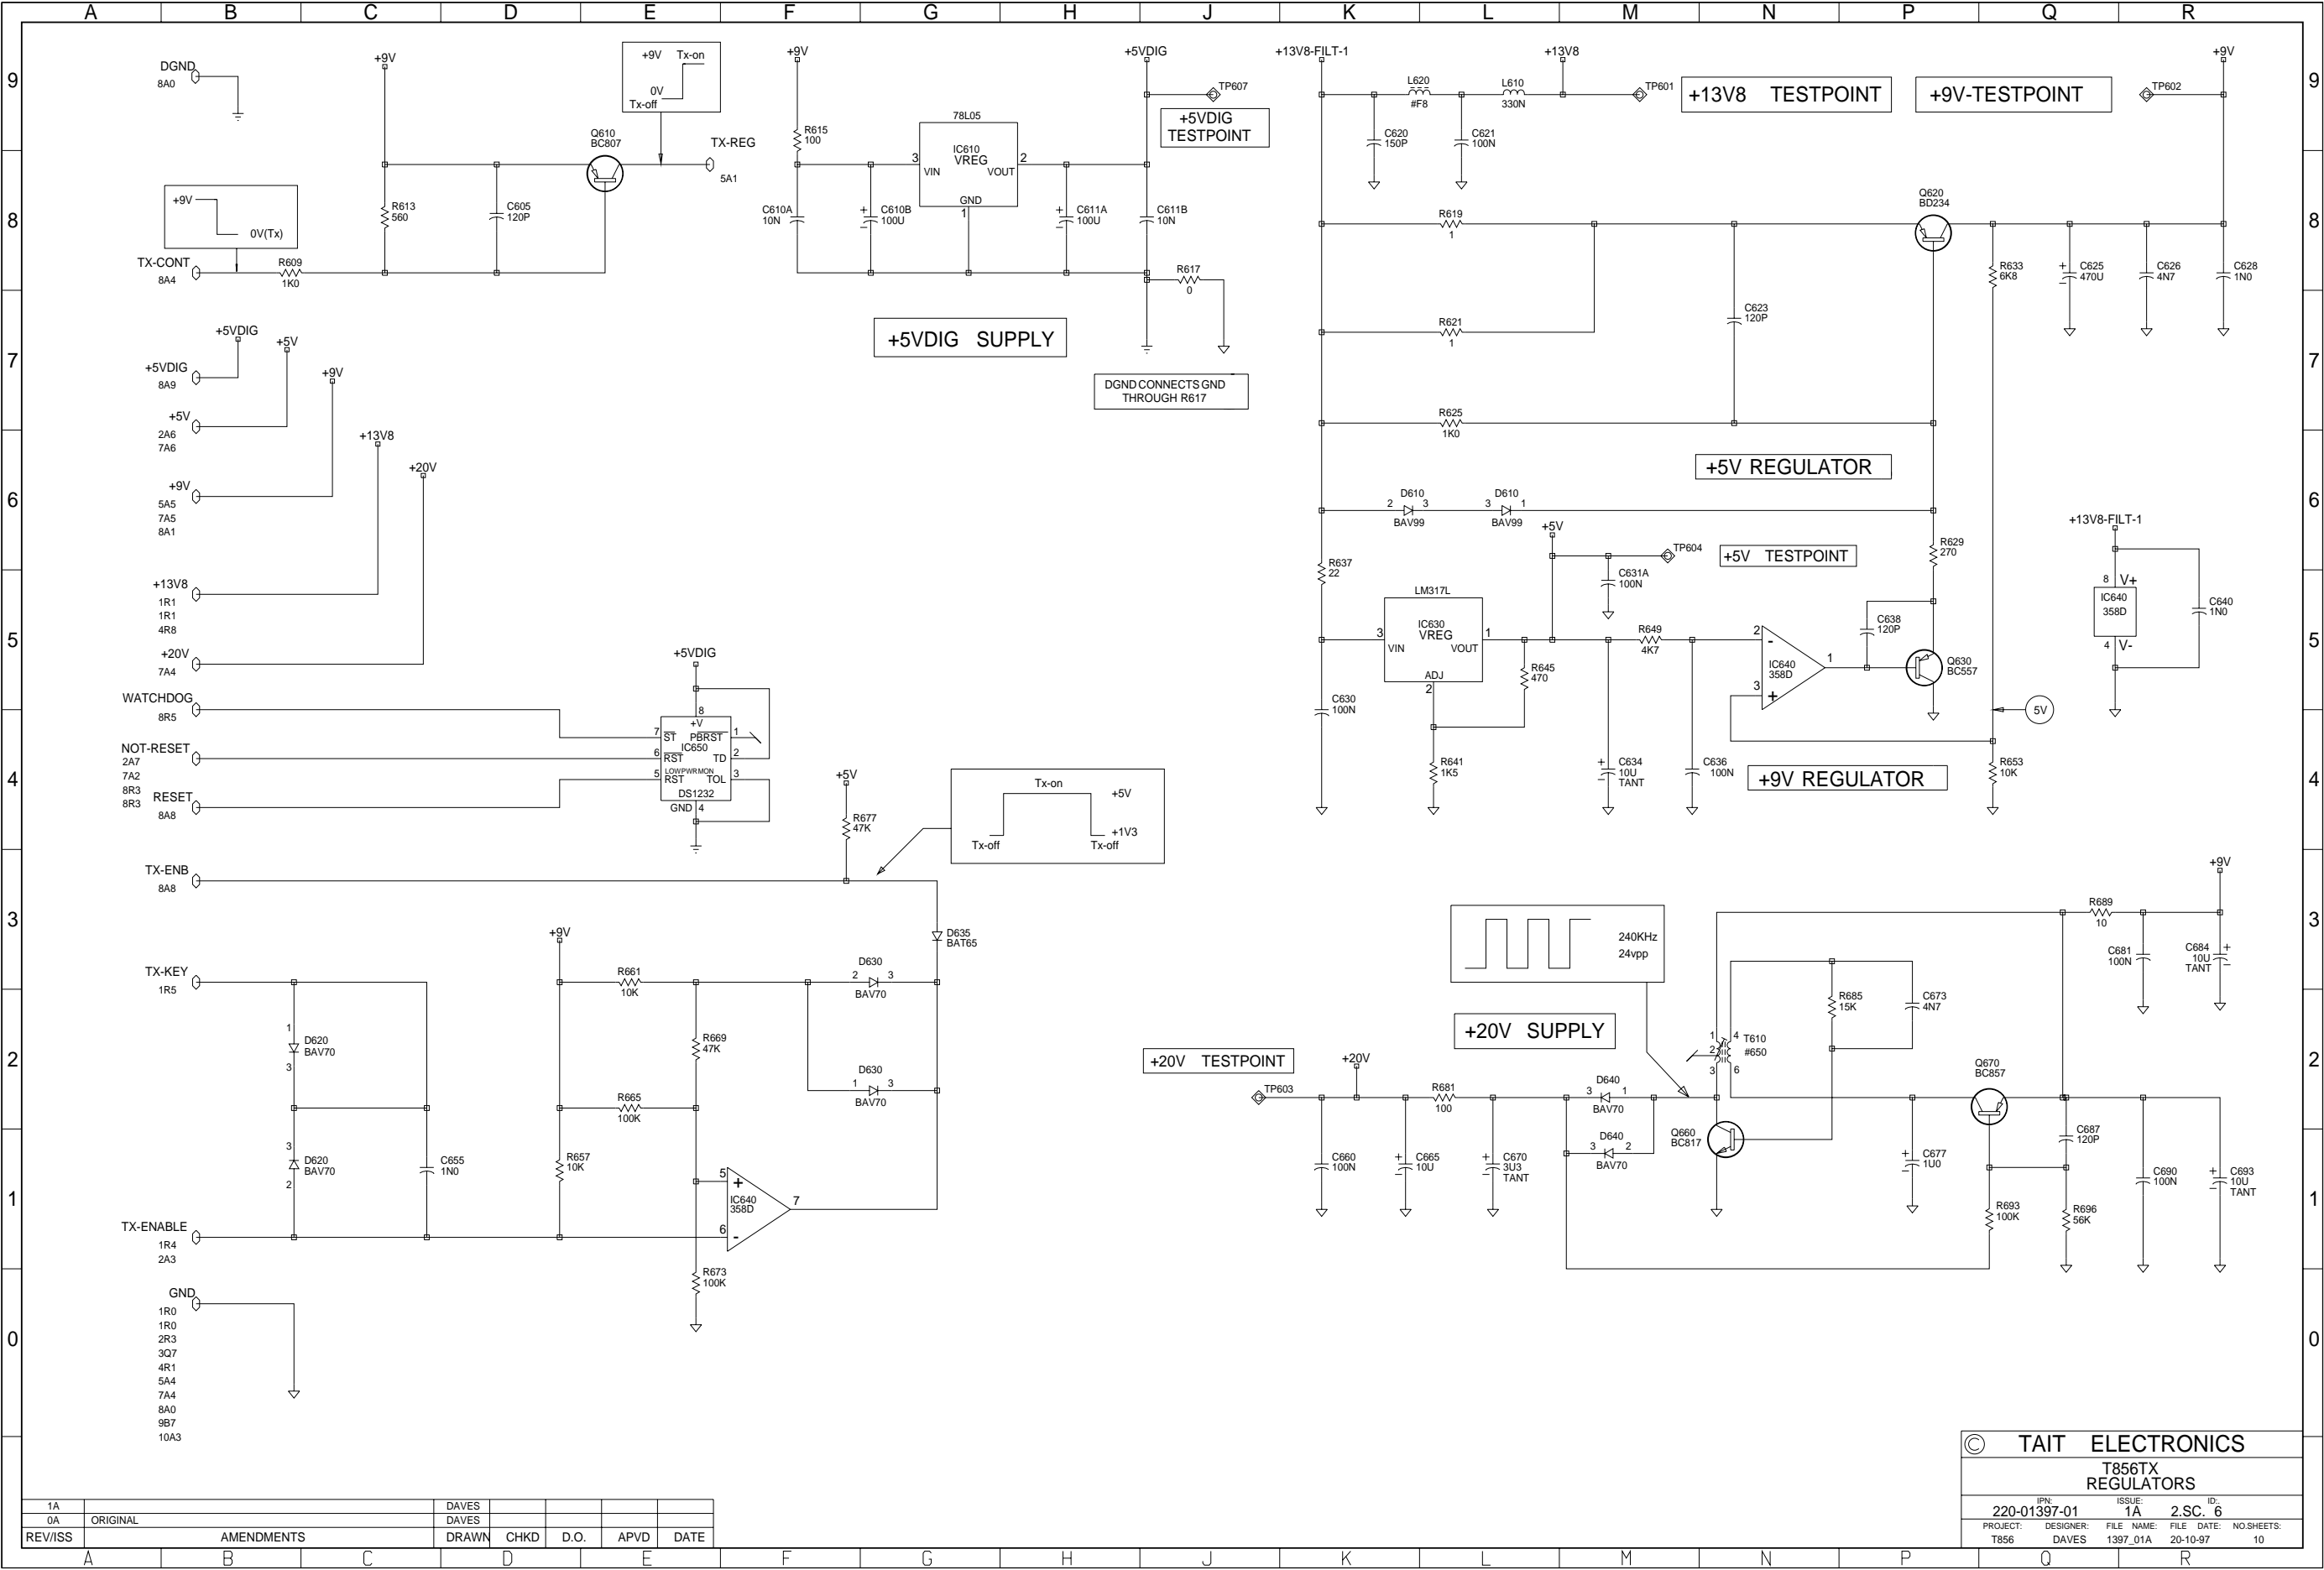

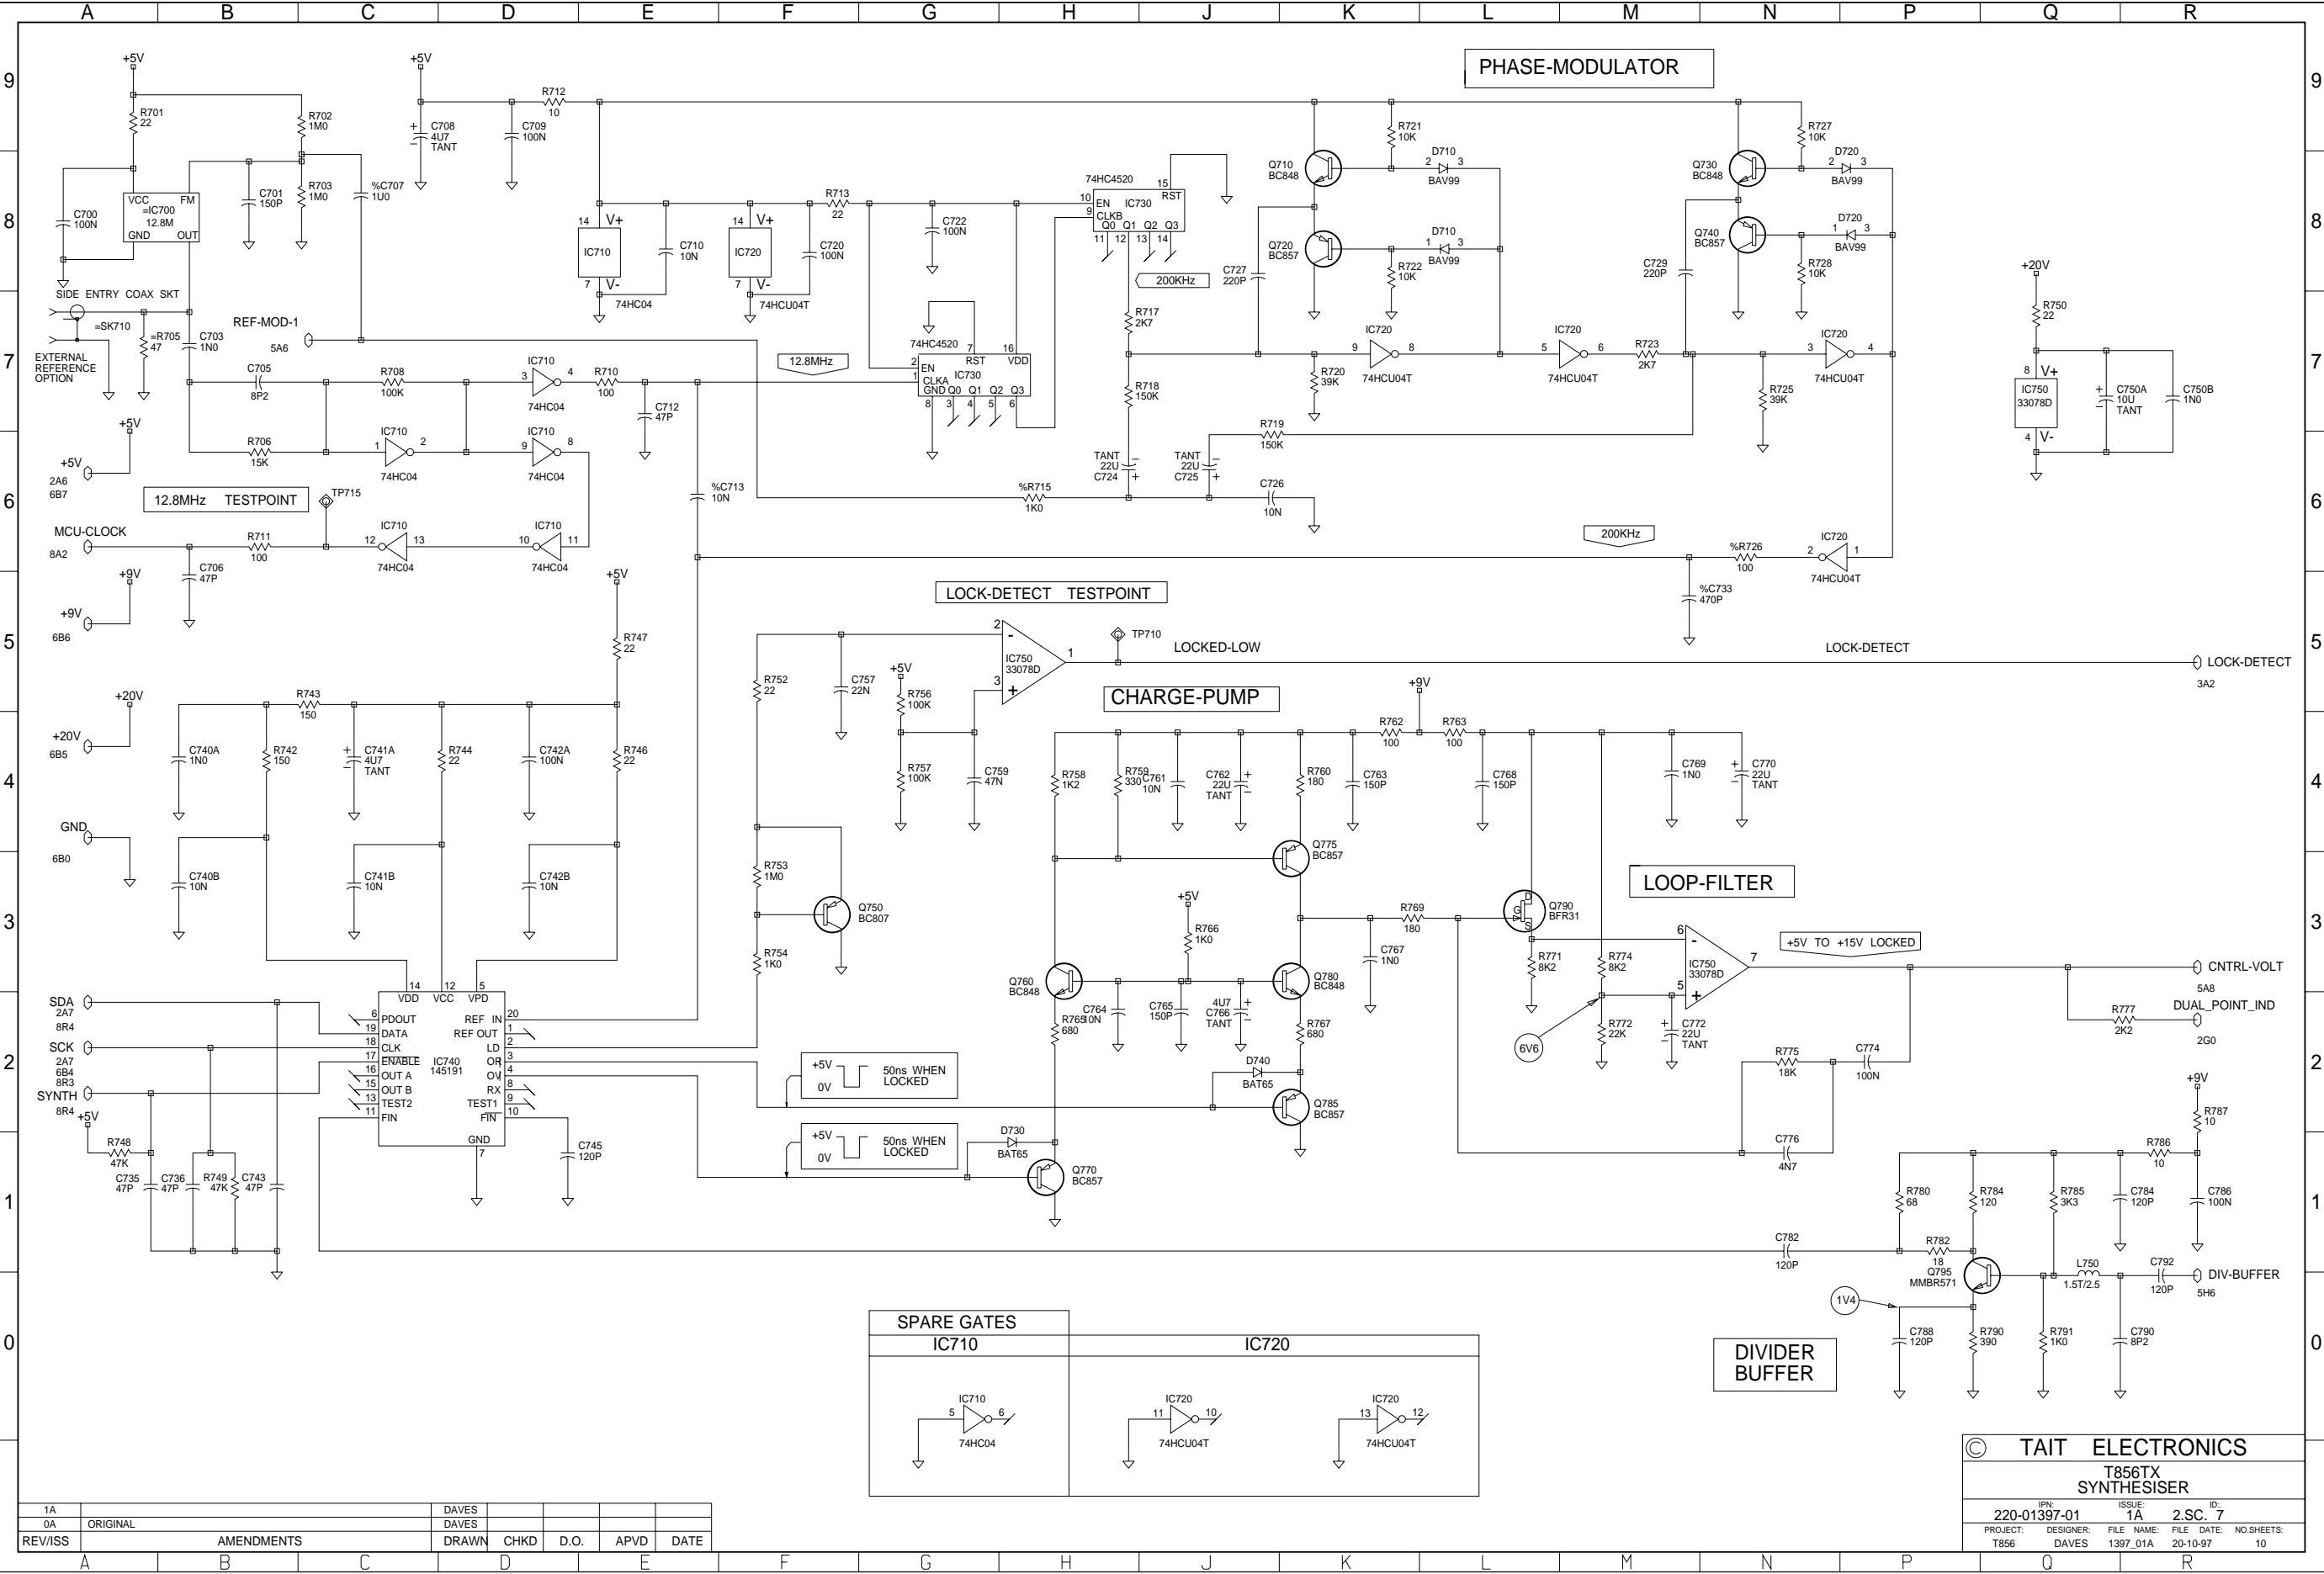

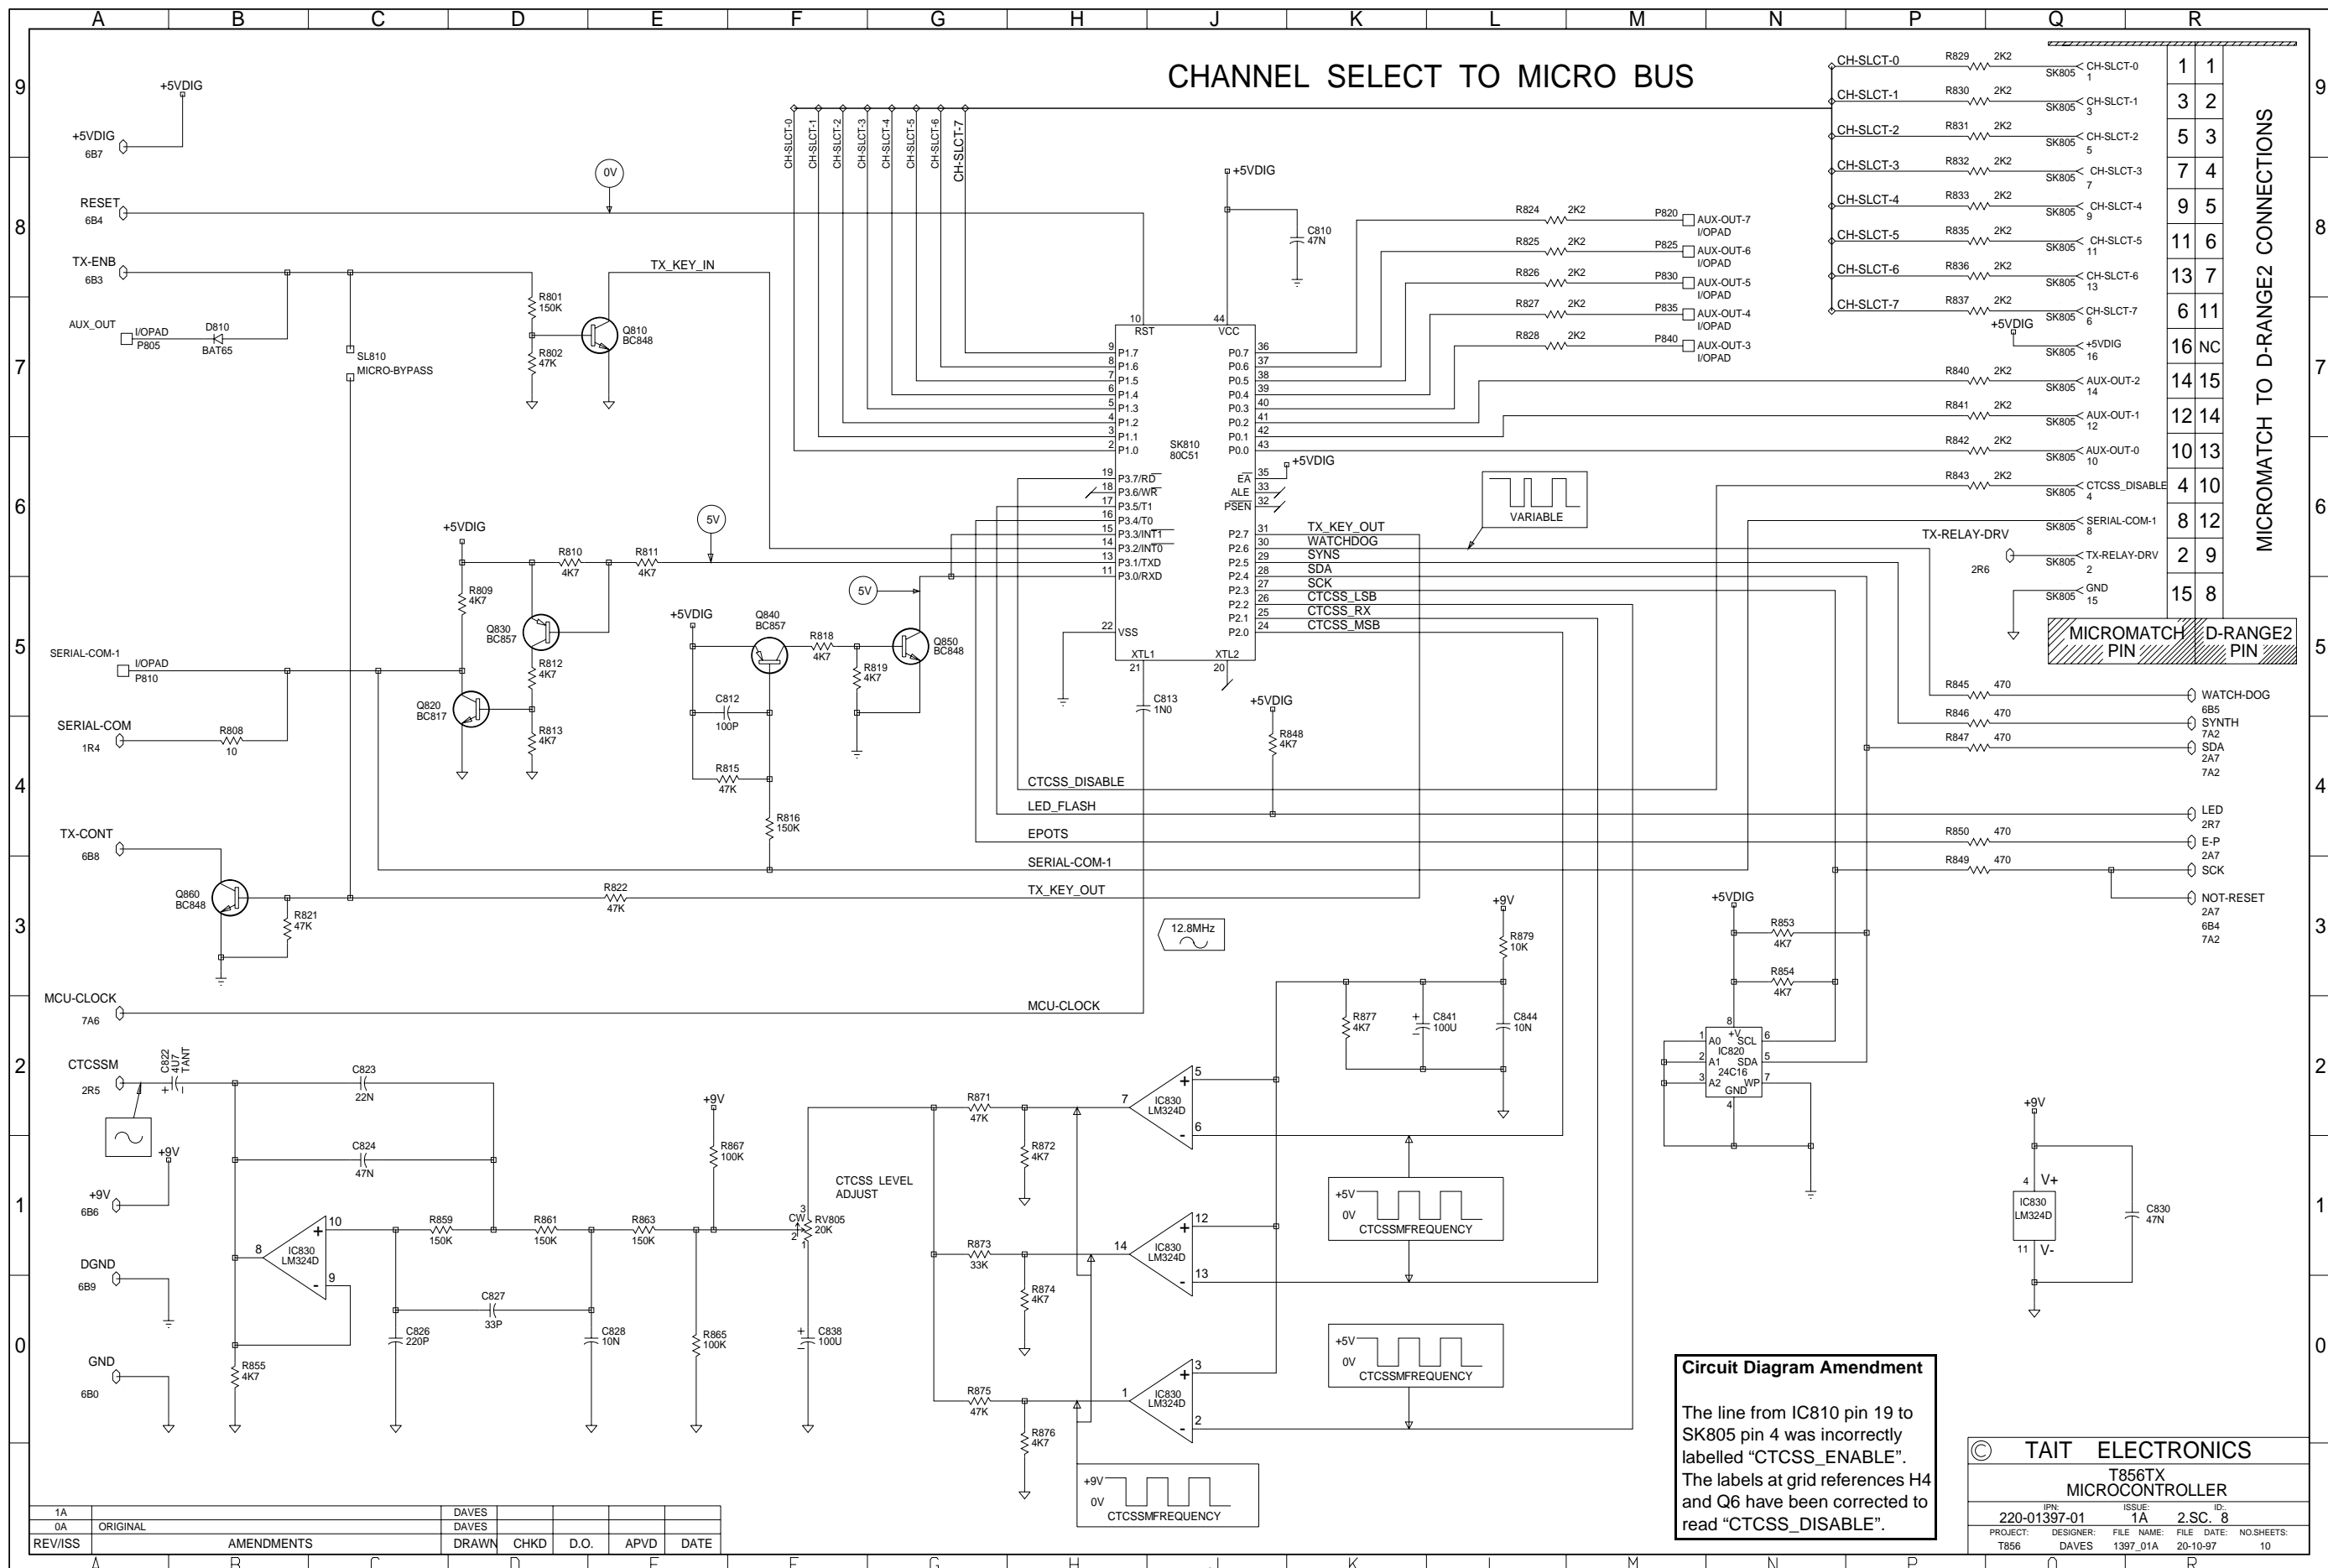

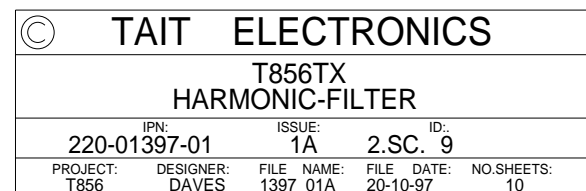

6.3 T857 Exciter PCB

This section contains the following information.

IPN	Section	Page
220-01398-02	Parts List	6.3.3
	Mechanical & Miscellaneous Parts	6.3.8
	Mechanical Assembly	6.3.9
	Grid Reference Index	6.3.11
	PCB Layout - Top Side	6.3.15
	PCB Layout - Bottom Side	6.3.16
	Test Points & Options Connections - Top Side	6.3.17
	Test Points & Options Connections - Bottom Side	6.3.18
	Exciter Overview Diagram	6.3.19
	Audio Processor Circuit Diagram	6.3.20
	Exciter Circuit Diagram	6.3.21
	VCO Section Circuit Diagram	6.3.23
	Regulators Circuit Diagram	6.3.24
	Synthesiser Circuit Diagram	6.3.25
	Microcontroller Circuit Diagram	6.3.26
	Harmonic Filter Circuit Diagram	6.3.27
220-01398-04	Parts List	6.3.29
	Mechanical & Miscellaneous Parts	6.3.36
	Mechanical Assembly	6.3.37
	Grid Reference Index	6.3.39
	PCB Layout - Top Side	6.3.43
	PCB Layout - Bottom Side	6.3.44
	Test Points & Options Connections - Top Side	6.3.45
	Test Points & Options Connections - Bottom Side	6.3.46
	Exciter Overview Diagram	6.3.47
	Audio Processor Circuit Diagram	6.3.48
	Exciter Circuit Diagram	6.3.49
	VCO Section Circuit Diagram	6.3.51
	Regulators Circuit Diagram	6.3.52
	Synthesiser Circuit Diagram	6.3.53
	Microcontroller Circuit Diagram	6.3.54
	Harmonic Filter Circuit Diagram	6.3.55

T857 Parts List (IPN 220-01398-02)

How To Use This Parts List

The components listed in this parts list are divided into two main types: those with a circuit reference (e.g. C2, D1, R121, etc.) and those without (miscellaneous and mechanical).

Those with a circuit reference are grouped in alphabetical order and then in numerical order within each group. Each component entry comprises three or four columns: the circuit reference, variant (if applicable), IPN and description. A number in the variant column indicates that this is a variant component which is fitted only to the product type listed. Static sensitive devices are indicated by an (S) at the start of the description column.

The miscellaneous and mechanical section lists the variant and common parts in IPN order. Where possible, a number in the legend column indicates their position in the mechanical assembly drawing.

The Parts List Amendments box below lists component changes that took place after the parts list and diagrams in this section were compiled. These changes (e.g. value changes, added/deleted components, etc.) are listed by circuit reference in alphanumeric order and supersede the information given in the parts list or diagrams. Components without circuit references are listed in IPN order.

Parts List Amendments

#C315	Changed from 12p (IPN 015-22120-01) to 8p2 (IPN 015-21820-01)		} T857-2X-XXXX Only: to improve power output & flatness across the band (710389).
#C316	Changed from 33p (IPN 015-22330-01) to 27p (IPN 015-22270-01)		
#L313	Changed from 1.5T/3.0 (IPN 052-08130-15) to 1.5T/2.5 (IPN 052-08125-15)		
D111	Changed from MR750 (IPN 001-00011-60) to MR2520L (IPN 001-00012-90) to provide overvoltage transient suppression (750087/88/89/90/91/92).		
=IC700	-16, -26, -36: TCXO changed to IPN 539-00010-55 to meet FCC Type Approval requirements (710923/36).		
R307	T857-2X-XXXX Only:	changed from 470Ω (IPN 036-13470-00) to 150Ω (IPN 036-13150-00) to increase average output power to 1W (710755).	
R326	T857-2X-XXXX Only:	chip resistor deleted - fitted as a leaded component across the emitter/base leads of Q304 to improve power output & flatness across the band (710389).	
R713	Changed from 22Ω (IPN 036-12220-00) to 0Ω (IPN 036-10000-00) to improve hum & noise performance (710837/839/840/841).		
RV220	Changed to IPN 042-05470-07 (47k preset) because IPN 042-05470-06 no longer available (710793/96/97/98).		
New Product Types	The following component changes apply to the T857-16-0500/26-0500/36-0500 Product Types:		
	&C269	changed to 4p7 (IPN 015-21470-01)	
	C271	changed to 56p (IPN 015-22560-01) - circuit reference changed to &C271	
	C289	changed to 68n (IPN 015-25680-08) - circuit reference changed to &C289	
	R290	changed to 680Ω (IPN 036-13680-00) - circuit reference changed to &R290.	
070-02001-00	Red front panel LED: replaced by 008-00014-79 (710928).		
070-02002-00	Green front panel LED: replaced by 008-00014-80 (710928).		
303-11169-03	T800 chassis:	replaced by 303-11169-04	} New chassis and lid tooling introduced, incorporating mechanical improvements and better RF shielding (750027, 750028 & 750029). Note that the new lids should be used only with the new chassis.
312-01052-01	T800 top lid:	replaced by 312-01052-02	
312-01053-01	T800 bottom lid:	replaced by 312-01053-02	
349-00020-36	The two M3x8 Torx screws which secure the module into the rack frame have been replaced by M3x8 Pozidriv screws (IPN 349-00020-55) (750101/2/3/5/6).		

Ref	Var	IPN	Description	Ref	Var	IPN	Description
Note: %D205 and %D210 are optional level limiting diodes for special applications. =R705 (47 ohm) and =SK710 are fitted in place of =IC700 when an external frequency reference is used. These two components are supplied with the auxiliary D-range kits (T800-06-0000 & T800-06-0001).				#C316	13	015-22330-01	CAP CER 0805 33P 5% NPO 50V
				#C316	15	015-22330-01	CAP CER 0805 33P 5% NPO 50V
				#C316	20	015-22330-01	CAP CER 0805 33P 5% NPO 50V
				#C316	23	015-22330-01	CAP CER 0805 33P 5% NPO 50V
				#C316	25	015-22330-01	CAP CER 0805 33P 5% NPO 50V
				#C316	30	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C316	35	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				C317		020-07470-04	CAP ELE RA 4M7 25V 20%8X13 SOL
				C318		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C319		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C320		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				#C321	10	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C321	13	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C321	15	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C321	20	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C321	23	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C321	25	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C321	30	015-22100-01	CAP CER 0805 10P+1/2P NPO 50V
				#C321	35	015-22100-01	CAP CER 0805 10P+1/2P NPO 50V
				#C322	10	015-21680-01	CAP CER 0805 6P8+1/4P NPO 50V
				#C322	13	015-21680-01	CAP CER 0805 6P8+1/4P NPO 50V
				#C322	15	015-21680-01	CAP CER 0805 6P8+1/4P NPO 50V
				#C322	20	015-21680-01	CAP CER 0805 6P8+1/4P NPO 50V
				#C322	23	015-21680-01	CAP CER 0805 6P8+1/4P NPO 50V
				#C322	25	015-21680-01	CAP CER 0805 6P8+1/4P NPO 50V
				#C322	30	015-21820-01	CAP CER 0805 8P2+1/4P NPO 50V
				#C322	35	015-21820-01	CAP CER 0805 8P2+1/4P NPO 50V
				C323		015-22330-01	CAP CER 0805 33P 5% NPO 50V
				C324		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C325		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				#C326	10	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C326	13	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C326	15	015-22220-01	CAP CER 0805 22P 5% NPO 50V
				#C326	20	015-22150-01	CAP CER 0805 15P 5% NPO 50V
				#C326	23	015-22150-01	CAP CER 0805 15P 5% NPO 50V
				#C326	25	015-22150-01	CAP CER 0805 15P 5% NPO 50V
				#C326	30	015-21820-01	CAP CER 0805 8P2+1/4P NPO 50V
				#C326	35	015-21820-01	CAP CER 0805 8P2+1/4P NPO 50V
				#C327	10	015-21220-01	CAP CER 0805 2P2+1/4P NPO 50V
				#C327	13	015-21220-01	CAP CER 0805 2P2+1/4P NPO 50V
				#C327	15	015-21220-01	CAP CER 0805 2P2+1/4P NPO 50V
				#C327	20	015-21220-01	CAP CER 0805 2P2+1/4P NPO 50V
				#C327	23	015-21220-01	CAP CER 0805 2P2+1/4P NPO 50V
				#C327	25	015-21220-01	CAP CER 0805 2P2+1/4P NPO 50V
				#C327	30	015-21560-01	CAP CER 0805 5P6+1/4P NPO 50V
				#C327	35	015-21560-01	CAP CER 0805 5P6+1/4P NPO 50V
				C328		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C329		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C330		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C331		015-25150-08	CAP CER 0805 15N 10% X7R 50V
				C332		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C333		015-05100-07	CAP 1206 CHIP NPO 10nF 25V
				C340		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C341		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C342		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C354		015-23150-01	CAP CER 0805 150P 5% NPO 50V
				C503		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
				C505		015-05470-08	CAP CER 1206 47N 10% X7R 50V
				C510		015-25150-08	CAP CER 0805 15N 10% X7R 50V
				C513		015-25100-08	CAP CER 0805 10N 10% X7R 50V
				C535		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C550		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
				C605		015-23120-01	CAP CER 0805 120P 5% NPO 50V
				C610A		015-25100-08	CAP CER 0805 10N 10% X7R 50V
				C610B		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM
				C611A		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM
				C611B		015-25100-08	CAP CER 0805 10N 10% X7R 50V
				C623		015-23120-01	CAP CER 0805 120P 5% NPO 50V
				C625		020-09470-07	CAP EL 470M16V20%V 8*20 3.5L.ESR
				C626		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
				C628		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C630		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C631A		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C634		014-08100-00	CAP TANT CHIP 10M 16VW +20%
				C636		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C638		015-23120-01	CAP CER 0805 120P 5% NPO 50V
				C640		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C655		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C660		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C665		020-08100-03	CAP ELE RAD 10UF 50V 5X11MM
				C670		025-07330-01	CAP TANT BEAD 3M3 35V
				C673		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
				C677		020-07100-02	CAP ELE RA 1M 50V 5X11MM
				C681		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C684		014-08100-00	CAP TANT CHIP 10M 16VW +20%
				C687		015-23120-01	CAP CER 0805 120P 5% NPO 50V
				C690		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C693		014-08100-00	CAP TANT CHIP 10M 16VW +20%
				C700		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C703		015-24100-08	CAP CER 0805 1N 10% X7R 50V
				C705		015-21820-01	CAP CER 0805 8P2+1/4P NPO 50V
				C706		015-22470-01	CAP CER 0805 47P 5% NPO 50V
				C708		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
				C709		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C710		015-25100-08	CAP CER 0805 10N 10% X7R 50V
				C712		015-22470-01	CAP CER 0805 47P 5% NPO 50V
				C720		015-06100-08	CAP CER 1206 100N 10% X7R 50V
				C722		015-06100-08	CAP CER 1206 100N 10% X7R 50V
C201		020-07470-92	CAP BI-P RA 4M7 50V 6X11 5 LS				
C202		020-07470-92	CAP BI-P RA 4M7 50V 6X11 5 LS				
C204		020-07470-92	CAP BI-P RA 4M7 50V 6X11 5 LS				
C205		020-07470-92	CAP BI-P RA 4M7 50V 6X11 5 LS				
C207		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM				
C209		015-25470-08	CAP CER 0805 47N 10% X7R 50V				
C210		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C211		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C213		014-08100-00	CAP TANT CHIP 10M 16VW +20%				
C215		014-08220-01	(L)CAP TANT 22UF10V276MSER				
C217		015-24220-08	CAP CER 0805 2N2 10% X7R 50V				
C219		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C221		014-08220-01	(L)CAP TANT 22UF10V276MSER				
C223		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C225		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C227		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C229		015-23150-01	CAP CER 0805 150P 5% NPO 50V				
C230		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C232		015-23150-01	CAP CER 0805 150P 5% NPO 50V				
C233		020-08470-02	CAP ELE RA 47M 16V 6X11MM				
C235		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C237		020-07100-02	CAP ELE RA 1M 50V 5X11MM				
C239		020-07470-92	CAP BI-P RA 4M7 50V 6X11 5 LS				
C241		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C242		014-08100-00	CAP TANT CHIP 10M 16VW +20%				
C243		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C245		015-23150-01	CAP CER 0805 150P 5% NPO 50V				
C247		015-23150-01	CAP CER 0805 150P 5% NPO 50V				
C249		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C251		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C253		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C255		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C257		015-22470-01	CAP CER 0805 47P 5% NPO 50V				
C259		015-25470-08	CAP CER 0805 47N 10% X7R 50V				
C260		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C261		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM				
C263		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM				
C265		020-07470-92	CAP BI-P RA 4M7 50V 6X11 5 LS				
C267		015-24470-08	CAP CER 0805 4N7 10% X7R 50V				
&C269	10	015-21150-01	CAP CER 0805 1P5+1/4P NPO 50V				
&C269	13	015-21150-01	CAP CER 0805 1P5+1/4P NPO 50V				
&C269	15	015-21470-01	CAP CER 0805 4P7+1/4P NPO 50V				
&C269	20	015-21150-01	CAP CER 0805 1P5+1/4P NPO 50V				
&C269	23	015-21150-01	CAP CER 0805 1P5+1/4P NPO 50V				
&C269	25	015-21470-01	CAP CER 0805 4P7+1/4P NPO 50V				
&C269	30	015-21150-01	CAP CER 0805 1P5+1/4P NPO 50V				
&C269	35	015-21470-01	CAP CER 0805 4P7+1/4P NPO 50V				
C271		015-22470-01	CAP CER 0805 47P 5% NPO 50V				
C273		015-25470-08	CAP CER 0805 47N 10% X7R 50V				
C275		015-23120-01	CAP CER 0805 120P 5% NPO 50V				
C277		015-25100-08	CAP CER 0805 10N 10% X7R 50V				
C279		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C281		015-25220-08	CAP CER 0805 22N 10% X7R 50V				
C283		015-21470-01	CAP CER 0805 4P7+1/4P NPO 50V				
C285		015-21470-01	CAP CER 0805 4P7+1/4P NPO 50V				
C287		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM				

Ref	Var	IPN	Description	Ref	Var	IPN	Description
C724		014-08220-01	(L)CAP TANT 22UF10V276MSER	L305		056-10330-02	(L) IND SMD 330NH
C725		014-08220-01	(L)CAP TANT 22UF10V276MSER	#L307	10	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C726		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L307	13	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C727		015-23220-01	CAP CER 0805 220P 5% NPO 50V	#L307	15	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C729		015-23220-01	CAP CER 0805 220P 5% NPO 50V	#L307	20	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
%C733		015-23470-08	CAP CER 0805 470P 10% X7R 50V	#L307	23	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C735		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#L307	25	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C736		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#L307	30	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C740A		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#L307	35	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C740B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	L309		065-00010-01	BEAD FERR 3B 6 HOLE
C741A		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	L312		052-08130-65	COIL A/W 6.5T/3.0MM HOR 0.8MM
C741B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L313	10	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C742A		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#L313	13	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C742B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L313	15	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C743		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#L313	20	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C745		015-23120-01	CAP CER 0805 120P 5% NPO 50V	#L313	23	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C750		025-08100-03	CAP 10M 35V 20% TANT 5MM L/S	#L313	25	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C757		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L313	30	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C759		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L313	35	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C761		015-25100-08	CAP CER 0805 10N 10% X7R 50V	L314		056-10330-02	(L) IND SMD 330NH
C762		014-08220-01	(L)CAP TANT 22UF10V276MSER	L750		052-08125-15	COIL A/W 1.5T/2.5MM HOR 0.8MM
C764		015-25100-08	CAP CER 0805 10N 10% X7R 50V	L910		052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C765		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	L920		052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C767		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C769		015-24100-08	CAP CER 0805 1N 10% X7R 50V	PL205		240-00020-67	HEADER 6W 2X3 PCB MTG STD
C770		014-08220-01	(L)CAP TANT 22UF10V276MSER	PL210		240-00020-67	HEADER 6W 2X3 PCB MTG STD
C772		014-08220-01	(L)CAP TANT 22UF10V276MSER	PL215		240-00020-44	HEADER 10W X2R PCB MTG 5*2
C774		022-06100-16	CAP METAL POLY 100N +-10% 100V	PL220		240-00020-67	HEADER 6W 2X3 PCB MTG STD
C776		015-24470-08	CAP CER 0805 4N7 10% X7R 50V				
C782		015-23120-01	CAP CER 0805 120P 5% NPO 50V	Q210		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C784		015-23120-01	CAP CER 0805 120P 5% NPO 50V	Q220		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
C786		015-06100-08	CAP CER 1206 100N 10% X7R 50V	Q230		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C788		015-23120-01	CAP CER 0805 120P 5% NPO 50V	Q240		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C790		015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V	Q250		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
C792		015-23120-01	CAP CER 0805 120P 5% NPO 50V	Q260		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
C810		015-25470-08	CAP CER 0805 47N 10% X7R 50V	Q270		000-00011-91	S) XSTR BD139 NPN AF PWR TO126
C812		015-23100-01	CAP CER 0805 100P 5% NPO 50V	Q301		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C813		015-24100-08	CAP CER 0805 1N 10% X7R 50V	Q302		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C822		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	Q303		000-00012-15	S) XSTR BD234 PNP AF PWR TO126
C823		015-25220-08	CAP CER 0805 22N 10% X7R 50V	Q304		000-00005-55	S) XSTR MRF555 NPN RF L/PWR
C824		015-25470-08	CAP CER 0805 47N 10% X7R 50V	Q305		000-00032-56	S) XSTR MRF630 NPN T039 UHF 3W
C826		015-23220-01	CAP CER 0805 220P 5% NPO 50V	Q306		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
C827		015-22330-01	CAP CER 0805 33P 5% NPO 50V	Q307		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
C828		015-25100-08	CAP CER 0805 10N 10% X7R 50V	Q308		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
C830		015-25470-08	CAP CER 0805 47N 10% X7R 50V	Q309		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
C838		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM	Q310		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C841		020-09100-04	CAP ELE RA 100M 10V 6.3X9MM	Q311		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C844		015-25100-08	CAP CER 0805 10N 10% X7R 50V	Q505		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
C910		015-01680-06	CAP CER 1210 6P8 NPO500VGRM42	Q510		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
C920		015-02100-06	CAP CER 1210 10P NPO500VGRM42	Q520		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
C930		015-01680-06	CAP CER 1210 6P8 NPO500VGRM42	Q530		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
				Q540		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
D111		001-00011-60	S) DIODE SR2607 -- USE MR750	Q550		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D201		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23	Q610		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
D202		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23	Q620		000-00012-15	S) XSTR BD234 PNP AF PWR TO126
D203		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23	Q630		000-50011-30	S) XSTR AI BC557B PNP TO92 AF
D220		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q660		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
D230		001-00010-40	S) DIODE ZENER 33V 1.3W	Q670		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D240		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23	Q710		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D250		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23	Q720		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D260		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23	Q730		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D270		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q740		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D510		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q750		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF
D610		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q760		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D620		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q770		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D630		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q775		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D635		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q780		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D640		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23	Q785		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
D710		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q790		000-10003-12	S) XSTR SMD BFR31 N JFET SOT23
D720		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23	Q795		000-10057-10	S) XSTR SMD BR571 NPN SOT23
D730		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q815		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
D740		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q820		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23
D810		001-10065-00	DIODE BAT65 SCHOTTKEY SOD123	Q830		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
				Q840		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS
				Q850		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
				Q860		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS
IC210		002-10003-24	S) IC SMD 324 4X O-AMP SO14	R160		036-12100-00	RES M/F 0805 10E 5%
IC220		002-10126-70	S) IC SMD DS1267S10K 2XDIG POT	R201		036-13560-00	RES M/F 0805 560E 5%
IC230		002-10003-24	S) IC SMD 324 4X O-AMP SO14	R202		036-14100-00	RES M/F 0805 1K 5%
IC240		002-10040-53	S)MC14053B SMD BREAK B4 MAKE	R204		036-14220-00	RES M/F 0805 2K2 5%
IC250		002-00020-50	S) IC 4N25A OPTOCOUPLER	R205		036-13220-00	RES M/F 0805 220E 5%
IC260		002-10003-24	S) IC SMD 324 4X O-AMP SO14	R206		036-14100-00	RES M/F 0805 1K 5%
IC300		002-10003-58	S) IC SMD LM358 DUAL O-AMP	R207		036-14390-00	RES M/F 0805 3K9 5%
IC610		002-00014-58	S) IC 78L05 5V 100MA REG TO92	R208		036-13560-00	RES M/F 0805 560E 5%
IC630		002-00014-62	S) IC 317L 100MA REG 3TER TO92	R209		036-15100-00	RES M/F 0805 10K 5%
IC640		002-10003-58	S) IC SMD LM358 DUAL O-AMP	R210		036-14220-00	RES M/F 0805 2K2 5%
IC650		002-10012-32	SMD DS1232LPS-2 LP RESET&W-DOG	R212		036-16100-00	RES M/F 0805 100K 5%
=IC700		539-00010-50	TCXO 12.8MHZ +-1PPM -20 +70C	R213		036-15100-00	RES M/F 0805 10K 5%
IC710		002-74900-04	S) IC SMD 74HC04D 6X INV BUFFD	R214		036-14820-00	RES M/F 0805 8K2 5%
IC720		002-74910-04	S) IC SMD 74HC04 6X INV	R215		036-16100-00	RES M/F 0805 100K 5%
IC730		002-10045-20	S) IC SMD 74HC4520T 2XCTR 4BIT	R216		036-16100-00	RES M/F 0805 100K 5%
IC740		002-14519-10	S) IC MC145191F SMD SYNTH	R217		036-14100-00	RES M/F 0805 1K 5%
IC750		002-10330-78	S) IC MC33078D 2X AMP LO NOISE	R218		036-16150-00	RES M/F 0805 150K 5%
IC810		002-08951-20	S) IC AT89C51 PLCC44 MIC 12MHZ	R219		036-14220-00	RES M/F 0805 2K2 5%
IC820		002-12416-00	S)IC SMD AT24C16N-10SC EEPROM	R221		036-14150-00	RES M/F 0805 1K5 5%
IC830		002-10003-24	S) IC SMD 324 4X O-AMP SO14	R223		036-17100-00	RES M/F 0805 1M 5%
				R224		036-14680-00	RES M/F 0805 6K8 5%
L300		065-00010-04	BEAD FERR F8 4X2X5MM				
L302		056-10330-02	(L) IND SMD 330NH				
L303		065-00010-04	BEAD FERR F8 4X2X5MM				

Ref	Var	IPN	Description	Ref	Var	IPN	Description
R225		036-17100-00	RES M/F 0805 1M 5%	R313		036-12220-00	RES M/F 0805 22E 5%
R226		036-15100-00	RES M/F 0805 10K 5%	R314		036-13470-00	RES M/F 0805 470E 5%
R227		036-14220-00	RES M/F 0805 2K2 5%	R323		036-14150-00	RES M/F 0805 1K5 5%
R229		036-16470-00	RES M/F 0805 470K 5%	R324		036-12470-00	RES M/F 0805 47E 5%
R230		036-16100-00	RES M/F 0805 100K 5%	R325		036-13560-00	RES M/F 0805 560E 5%
R231		036-15100-00	RES M/F 0805 10K 5%	R326		036-12470-00	RES M/F 0805 47E 5%
R232		036-16330-00	RES M/F 0805 330K 5%	R327		036-14100-00	RES M/F 0805 1K 5%
R233		036-16100-00	RES M/F 0805 100K 5%	R328		036-13470-00	RES M/F 0805 470E 5%
R235		036-14470-00	RES M/F 0805 4K7 5%	R329		036-12100-00	RES M/F 0805 10E 5%
R237		036-15470-00	RES M/F 0805 47K 5%	#R330	10	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R238		036-15470-00	RES M/F 0805 47K 5%	#R330	13	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R239		036-14150-00	RES M/F 0805 1K5 5%	#R330	15	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R241		036-14470-00	RES M/F 0805 4K7 5%	#R330	20	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R242		036-14220-00	RES M/F 0805 2K2 5%	#R330	23	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R244		036-15100-00	RES M/F 0805 10K 5%	#R330	25	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R245		036-16100-00	RES M/F 0805 100K 5%	#R330	30	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6
R247		036-15100-00	RES M/F 0805 10K 5%	#R330	35	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6
R248		036-16100-00	RES M/F 0805 100K 5%	#R331	10	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R249		036-16100-00	RES M/F 0805 100K 5%	#R331	13	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R251		036-16100-00	RES M/F 0805 100K 5%	#R331	15	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R253		036-16100-00	RES M/F 0805 100K 5%	#R331	20	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R254		036-16100-00	RES M/F 0805 100K 5%	#R331	23	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R255		036-15100-00	RES M/F 0805 10K 5%	#R331	25	030-52180-20	RES FILM AI 18E 5% 0.4W 4X1.6
R256		036-15470-00	RES M/F 0805 47K 5%	#R331	30	030-52220-20	RES FILM AI 22E 5% 0.4W 4X1.6
R257		036-16330-00	RES M/F 0805 330K 5%	#R331	35	030-52220-20	RES FILM AI 22E 5% 0.4W 4X1.6
R258		036-16150-00	RES M/F 0805 150K 5%	#R332	10	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R259		036-15220-00	RES M/F 0805 22K 5%	#R332	13	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R260		036-15470-00	RES M/F 0805 47K 5%	#R332	15	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R262		036-15470-00	RES M/F 0805 47K 5%	#R332	20	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
R263		036-14470-00	RES M/F 0805 4K7 5%	#R332	23	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
&R264	10	036-15220-00	RES M/F 0805 22K 5%	#R332	25	030-53270-20	RES FILM AI 270E 5% 0.4W 4X1.6
&R264	13	036-15220-00	RES M/F 0805 22K 5%	#R332	30	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6
&R264	15	036-15270-00	RES M/F 0805 27K 5%	#R332	35	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6
&R264	20	036-15220-00	RES M/F 0805 22K 5%	R333		036-12470-00	RES M/F 0805 47E 5%
&R264	23	036-15220-00	RES M/F 0805 22K 5%	R334		032-33100-10	RES M/F PWR 100E 5% 2W 12X4.5
&R264	25	036-15270-00	RES M/F 0805 27K 5%	R335		036-12100-00	RES M/F 0805 10E 5%
&R264	30	036-15220-00	RES M/F 0805 22K 5%	R340		036-14150-00	RES M/F 0805 1K5 5%
&R264	35	036-15270-00	RES M/F 0805 27K 5%	R341		036-15470-00	RES M/F 0805 47K 5%
&R265	10	036-15150-00	RES M/F 0805 15K 5%	R342		036-15100-00	RES M/F 0805 10K 5%
&R265	13	036-15150-00	RES M/F 0805 15K 5%	R343		036-15150-00	RES M/F 0805 15K 5%
&R265	15	036-15180-00	RES M/F 0805 18K 5%	R344		036-15470-00	RES M/F 0805 47K 5%
&R265	20	036-15150-00	RES M/F 0805 15K 5%	R345		036-16120-00	RES M/F 0805 120K 5%
&R265	23	036-15150-00	RES M/F 0805 15K 5%	R346		036-15100-00	RES M/F 0805 10K 5%
&R265	25	036-15180-00	RES M/F 0805 18K 5%	R347		036-14100-00	RES M/F 0805 1K 5%
&R265	30	036-15150-00	RES M/F 0805 15K 5%	R348		036-14100-00	RES M/F 0805 1K 5%
&R265	35	036-15180-00	RES M/F 0805 18K 5%	R349		036-16100-00	RES M/F 0805 100K 5%
&R266	10	036-15470-00	RES M/F 0805 47K 5%	R355		036-14100-00	RES M/F 0805 1K 5%
&R266	13	036-15470-00	RES M/F 0805 47K 5%	R356		036-15150-00	RES M/F 0805 15K 5%
&R266	15	036-15560-00	RES M/F 0805 56K 5%	R357		036-15150-00	RES M/F 0805 15K 5%
&R266	20	036-15470-00	RES M/F 0805 47K 5%	R358		036-14470-00	RES M/F 0805 4K7 5%
&R266	23	036-15470-00	RES M/F 0805 47K 5%	R359		036-14100-00	RES M/F 0805 1K 5%
&R266	25	036-15560-00	RES M/F 0805 56K 5%	R501		036-15100-00	RES M/F 0805 10K 5%
&R266	30	036-15470-00	RES M/F 0805 47K 5%	R502		036-15100-00	RES M/F 0805 10K 5%
&R266	35	036-15560-00	RES M/F 0805 56K 5%	R503		036-14560-00	RES M/F 0805 5K6 5%
R267		036-14220-00	RES M/F 0805 2K2 5%	R504		036-13330-00	RES M/F 0805 330E 5%
R268		036-13100-00	RES M/F 0805 100E 5%	R505		036-15150-00	RES M/F 0805 15K 5%
R269		036-15100-00	RES M/F 0805 10K 5%	R510		036-14150-00	RES M/F 0805 1K5 5%
R270		036-13470-00	RES M/F 0805 470E 5%	R514		036-12330-00	RES M/F 0805 33E 5%
R271		036-16390-00	RES M/F 0805 390K 5%	R515		036-12560-00	RES M/F 0805 56E 5%
R272		036-13560-00	RES M/F 0805 560E 5%	R517		036-13330-00	RES M/F 0805 330E 5%
R273		036-15120-00	RES M/F 0805 12K 5%	R518		036-12180-00	RES M/F 0805 18E 5%
R274		036-15150-00	RES M/F 0805 15K 5%	R519		036-13330-00	RES M/F 0805 330E 5%
R275		036-14270-00	RES M/F 0805 2K7 5%	R520		036-16120-00	RES M/F 0805 120K 5%
R277		036-16100-00	RES M/F 0805 100K 5%	R525		036-15470-00	RES M/F 0805 47K 5%
R278		036-16120-00	RES M/F 0805 120K 5%	R530		036-15220-00	RES M/F 0805 22K 5%
R279		036-17100-00	RES M/F 0805 1M 5%	R535		036-15100-00	RES M/F 0805 10K 5%
R280		036-15100-00	RES M/F 0805 10K 5%	R540		036-14220-00	RES M/F 0805 2K2 5%
R282		036-15560-00	RES M/F 0805 56K 5%	R545		036-14470-00	RES M/F 0805 4K7 5%
R283		036-15560-00	RES M/F 0805 56K 5%	R550		036-14470-00	RES M/F 0805 4K7 5%
R284		036-17100-00	RES M/F 0805 1M 5%	R555		036-14470-00	RES M/F 0805 4K7 5%
R285		036-10000-00	RES M/F 0805 ZERO OHM	R560		036-14270-00	RES M/F 0805 2K7 5%
R286		036-14220-00	RES M/F 0805 2K2 5%	R609		036-14100-00	RES M/F 0805 1K 5%
R287		036-15100-00	RES M/F 0805 10K 5%	R613		036-13560-00	RES M/F 0805 560E 5%
R288		036-15150-00	RES M/F 0805 15K 5%	R615		036-13100-00	RES M/F 0805 100E 5%
R289		036-16100-00	RES M/F 0805 100K 5%	R617		036-10000-00	RES M/F 0805 ZERO OHM
R290		036-13560-00	RES M/F 0805 560E 5%	R619		032-31100-00	RES M/F PWR 1E0 5% 1W 12X4.5MM
R291		036-10000-00	RES M/F 0805 ZERO OHM	R621		032-31100-00	RES M/F PWR 1E0 5% 1W 12X4.5MM
R292		036-14470-00	RES M/F 0805 4K7 5%	R625		036-14100-00	RES M/F 0805 1K 5%
R293		036-15470-00	RES M/F 0805 47K 5%	R629		032-33270-00	RES M/F PWR 270E 5% 1W 12X4.5
R294		036-14470-00	RES M/F 0805 4K7 5%	R633		036-14680-00	RES M/F 0805 6K8 5%
R295		036-14270-00	RES M/F 0805 2K7 5%	R637		036-12220-00	RES M/F 0805 22E 5%
R296		036-14100-00	RES M/F 0805 1K 5%	R641		036-14150-00	RES M/F 0805 1K5 5%
R297		036-14560-00	RES M/F 0805 5K6 5%	R645		036-13470-00	RES M/F 0805 470E 5%
%R298		036-16100-00	RES M/F 0805 100K 5%	R649		036-14470-00	RES M/F 0805 4K7 5%
R299		036-14270-00	RES M/F 0805 2K7 5%	R653		036-15100-00	RES M/F 0805 10K 5%
R300		036-12220-00	RES M/F 0805 22E 5%	R657		036-15100-00	RES M/F 0805 10K 5%
R301		036-15100-00	RES M/F 0805 10K 5%	R661		036-15100-00	RES M/F 0805 10K 5%
R302		036-15220-00	RES M/F 0805 22K 5%	R665		036-16100-00	RES M/F 0805 100K 5%
R303		036-14270-00	RES M/F 0805 2K7 5%	R669		036-15470-00	RES M/F 0805 47K 5%
R304		036-16100-00	RES M/F 0805 100K 5%	R673		036-16100-00	RES M/F 0805 100K 5%
R305		036-15220-00	RES M/F 0805 22K 5%	R677		036-15470-00	RES M/F 0805 47K 5%
R306		036-14150-00	RES M/F 0805 1K5 5%	R681		036-13100-00	RES M/F 0805 100E 5%
R307		036-13470-00	RES M/F 0805 470E 5%	R685		036-15150-00	RES M/F 0805 15K 5%
R308		036-14220-00	RES M/F 0805 2K2 5%	R689		036-12100-00	RES M/F 0805 10E 5%
R309		036-15100-00	RES M/F 0805 10K 5%	R693		036-16100-00	RES M/F 0805 100K 5%
R310		036-13470-00	RES M/F 0805 470E 5%	R696		036-15560-00	RES M/F 0805 56K 5%
R311		036-13470-00	RES M/F 0805 470E 5%	R701		036-12220-00	RES M/F 0805 22E 5%
R312		036-14100-00	RES M/F 0805 1K 5%	R702		036-17100-00	RES M/F 0805 1M 5%

Ref	Var	IPN	Description	Ref	Var	IPN	Description
R703		036-17100-00	RES M/F 0805 1M 5%	R867		036-16100-00	RES M/F 0805 100K 5%
R706		036-15150-00	RES M/F 0805 15K 5%	R871		036-15470-00	RES M/F 0805 47K 5%
R708		036-16100-00	RES M/F 0805 100K 5%	R872		036-14470-00	RES M/F 0805 4K7 5%
R710		036-13100-00	RES M/F 0805 100E 5%	R873		036-15330-00	RES M/F 0805 33K 5%
R711		036-13100-00	RES M/F 0805 100E 5%	R874		036-14470-00	RES M/F 0805 4K7 5%
R712		036-12100-00	RES M/F 0805 10E 5%	R875		036-15470-00	RES M/F 0805 47K 5%
R713		036-12220-00	RES M/F 0805 22E 5%	R876		036-14470-00	RES M/F 0805 4K7 5%
%R715		036-14100-00	RES M/F 0805 1K 5%	R877		036-14470-00	RES M/F 0805 4K7 5%
R717		036-14270-00	RES M/F 0805 2K7 5%	R879		036-15100-00	RES M/F 0805 10K 5%
R718		036-16150-00	RES M/F 0805 150K 5%				
R719		036-16150-00	RES M/F 0805 150K 5%	RV210		040-05100-23	POT 10K LOG PCB 15MM SLOT SFT
R720		036-15390-00	RES M/F 0805 39K 5%	RV220		042-05470-06	RES PRE 47K CAR 6MM FLAT T/ADJ
R721		036-15100-00	RES M/F 0805 10K 5%	RV805		042-05220-07	RES PRE 22K CAR 6MM FLAT D/ADJ
R722		036-15100-00	RES M/F 0805 10K 5%				
R723		036-14270-00	RES M/F 0805 2K7 5%	SK205		240-02020-05	SKT STEREO PHONE JACK PCB MTG
R725		036-15390-00	RES M/F 0805 39K 5%	SK310		240-02100-44	SKT COAX MINI JACK PCB MT ANG.
%R726		036-13100-00	RES M/F 0805 100E 5%	SK420		240-02100-44	SKT COAX MINI JACK PCB MT ANG.
R727		036-15100-00	RES M/F 0805 10K 5%	SK501		240-04021-77	SKT JACK 1.3 PCB MT 64W
R728		036-15100-00	RES M/F 0805 10K 5%	SK502		240-04021-77	SKT JACK 1.3 PCB MT 64W
R742		036-13150-00	RES M/F 0805 150E 5%	SK503		240-04021-77	SKT JACK 1.3 PCB MT 64W
R743		036-13150-00	RES M/F 0805 150E 5%	SK504		240-04021-77	SKT JACK 1.3 PCB MT 64W
R744		036-12220-00	RES M/F 0805 22E 5%	SK505		240-04021-77	SKT JACK 1.3 PCB MT 64W
R746		036-12220-00	RES M/F 0805 22E 5%	SK513		240-04021-77	SKT JACK 1.3 PCB MT 64W
R747		036-12220-00	RES M/F 0805 22E 5%	SK522		240-04021-77	SKT JACK 1.3 PCB MT 64W
R748		036-15470-00	RES M/F 0805 47K 5%	SK531		240-04021-77	SKT JACK 1.3 PCB MT 64W
R749		036-15470-00	RES M/F 0805 47K 5%	SK532		240-04021-77	SKT JACK 1.3 PCB MT 64W
R750		036-12220-00	RES M/F 0805 22E 5%	SK533		240-04021-77	SKT JACK 1.3 PCB MT 64W
R752		036-12220-00	RES M/F 0805 22E 5%	SK534		240-04021-77	SKT JACK 1.3 PCB MT 64W
R753		036-17100-00	RES M/F 0805 1M 5%	SK535		240-04021-77	SKT JACK 1.3 PCB MT 64W
R754		036-14100-00	RES M/F 0805 1K 5%	SK805		240-10000-07	CONN SMD SKT 16W 2R M-MATCH
R756		036-16470-00	RES M/F 0805 470K 5%	SK810		240-04020-42	SKT 44 PIN SMD PLCC
R757		036-16470-00	RES M/F 0805 470K 5%				
R758		036-14120-00	RES M/F 0805 1K2 5%	SW230		232-00010-26	SWITCH PUSH SPDT R-ANG PCB MTG
R759		036-13330-00	RES M/F 0805 330E 5%				
R760		036-13180-00	RES M/F 0805 180E 5%				
R762		036-13100-00	RES M/F 0805 100E 5%	T210		053-00010-17	XFMR T4030 LINE MATCH POTCORE
R763		036-13100-00	RES M/F 0805 100E 5%	T610		050-00016-50	COIL TAIT NO 650 455KHZ
R765		036-13680-00	RES M/F 0805 680E 5%				
R766		036-14100-00	RES M/F 0805 1K 5%				
R767		036-13680-00	RES M/F 0805 680E 5%				
R769		036-13180-00	RES M/F 0805 180E 5%				
R771		036-14820-00	RES M/F 0805 8K2 5%				
R772		036-15220-00	RES M/F 0805 22K 5%				
R774		036-14820-00	RES M/F 0805 8K2 5%				
R775		036-15180-00	RES M/F 0805 18K 5%				
R777		036-14220-00	RES M/F 0805 2K2 5%				
R780		036-12680-00	RES M/F 0805 68E 5%				
R782		036-12180-00	RES M/F 0805 18E 5%				
R784		036-13120-00	RES M/F 0805 120E 5%				
R785		036-14330-00	RES M/F 0805 3K3 5%				
R786		036-12100-00	RES M/F 0805 10E 5%				
R787		036-12100-00	RES M/F 0805 10E 5%				
R790		036-13390-00	RES M/F 0805 390E 5%				
R791		036-14100-00	RES M/F 0805 1K 5%				
R801		036-16150-00	RES M/F 0805 150K 5%				
R802		036-15470-00	RES M/F 0805 47K 5%				
R808		036-12100-00	RES M/F 0805 10E 5%				
R809		036-14470-00	RES M/F 0805 4K7 5%				
R810		036-14470-00	RES M/F 0805 4K7 5%				
R811		036-14470-00	RES M/F 0805 4K7 5%				
R812		036-14470-00	RES M/F 0805 4K7 5%				
R813		036-14470-00	RES M/F 0805 4K7 5%				
R815		036-15470-00	RES M/F 0805 47K 5%				
R816		036-16150-00	RES M/F 0805 150K 5%				
R818		036-14470-00	RES M/F 0805 4K7 5%				
R819		036-14470-00	RES M/F 0805 4K7 5%				
R821		036-15470-00	RES M/F 0805 47K 5%				
R822		036-15470-00	RES M/F 0805 47K 5%				
R824		036-14220-00	RES M/F 0805 2K2 5%				
R825		036-14220-00	RES M/F 0805 2K2 5%				
R826		036-14220-00	RES M/F 0805 2K2 5%				
R827		036-14220-00	RES M/F 0805 2K2 5%				
R828		036-14220-00	RES M/F 0805 2K2 5%				
R829		036-14220-00	RES M/F 0805 2K2 5%				
R830		036-14220-00	RES M/F 0805 2K2 5%				
R831		036-14220-00	RES M/F 0805 2K2 5%				
R832		036-14220-00	RES M/F 0805 2K2 5%				
R833		036-14220-00	RES M/F 0805 2K2 5%				
R835		036-14220-00	RES M/F 0805 2K2 5%				
R836		036-14220-00	RES M/F 0805 2K2 5%				
R837		036-14220-00	RES M/F 0805 2K2 5%				
R840		036-14220-00	RES M/F 0805 2K2 5%				
R841		036-14220-00	RES M/F 0805 2K2 5%				
R842		036-14220-00	RES M/F 0805 2K2 5%				
R843		036-14220-00	RES M/F 0805 2K2 5%				
R845		036-13470-00	RES M/F 0805 470E 5%				
R846		036-13470-00	RES M/F 0805 470E 5%				
R847		036-13470-00	RES M/F 0805 470E 5%				
R848		036-14470-00	RES M/F 0805 4K7 5%				
R849		036-13470-00	RES M/F 0805 470E 5%				
R850		036-13470-00	RES M/F 0805 470E 5%				
R853		036-14470-00	RES M/F 0805 4K7 5%				
R854		036-14470-00	RES M/F 0805 4K7 5%				
R855		036-14470-00	RES M/F 0805 4K7 5%				
R859		036-16150-00	RES M/F 0805 150K 5%				
R861		036-16150-00	RES M/F 0805 150K 5%				
R863		036-16150-00	RES M/F 0805 150K 5%				
R865		036-16100-00	RES M/F 0805 100K 5%				

T857 Mechanical & Miscellaneous Parts (220-01398-02)

IPN	Legend	Description	IPN	Legend	Description
070-01001-00	13/25	D-RANGE 15 WAY COMPL T800			
070-02001-00		LED RED COMPL T800 RX/TX/EX			
070-02002-00		LED GREEN COMPL T800 RX/TX/EX			
206-00010-11		COAX 50 OHM RG316-U PTFE Connects SK310 to SK420.			
220-01145-02	1	PCB T85X VCO			
220-01398-02	2	PCB T857 SERIES II TOP			
232-00020-26	3	BUTTON 232-00010-26 SWITCH			
240-00100-43		PLG COAX MINI PIN CRIMP 1.5D For coax connecting SK310 to SK420.			
240-02100-06	4	SKT COAX N TYPE PNL MTG OP-TER			
240-04020-62		SKT 2 W RECEP SHORTING LINK PL205/210/215/220.			
303-11169-03	5	CHASSIS PAINTED T800 SERIES			
303-23118-00	6	COVER A3M2247 D RANGE T855/7			
303-50074-00	7	CLIP A3M2246 SPRING CLAMP T857			
303-50078-00	8	CLIP A4M2630 SPR. CABLE CLAMP			
308-01007-01	9	HANDLE BASE STATION SERIES II			
312-01052-01	10	LID TOP PNTD A1M2364 T800			
312-01053-01	11	LID BOTTOM PNTD A1M2364 T800			
316-06619-00	12	PNL FRT EX, NO EX OUT SER II			
345-00040-10	14	SCRW M3X6MM P/POZ ST BZ			
349-00020-36	15	LIM)SCREW TT M3X8m PANTORX BLK			
349-00020-43	16	SCRW T/T M4X12MM P/POZ BZ			
349-00020-45	17	SCRW T/T M4X20MM P/POZ BZ			
350-00016-42	18	SPACER 5MM HI 8MM ST 2.5MM HO			
352-00010-08	19	NUT M3 COLD FORM HEX ST BZ			
352-00010-29	20	NUT M4 NYLOC HEX			
353-00010-10	21	WSHR M3 FLAT 7MMX0.6MM ST BZ			
353-00010-13	22	WSHR M3 S/PROOF INT BZ			
362-00010-23	23	GASKET SIL TO-220 CLIP MTG.			
362-00010-33	24	GROMMET LED MTG 3MM			
365-00011-53		LABEL 104X37MM			
365-00100-20		LABEL WHITE S/A 28X11MM			
365-01541-00		LABEL TX/RX/EX TYPE APR/SER NO			
399-00010-51		BAG PLASTIC 75X100MM			
410-01081-01		CRT T800 SERIES II			
410-01082-01		CRTN 10 T800 KIWI 423X410X360			

replace A4 pages C6.3.9/C6.3.10 with A3 pages C6.3.9/C6.3.10

replace A4 pages C6.3.9/C6.3.10 with A3 pages C6.3.9/C6.3.10

T857 Grid Reference Index (IPN 220-01398-02)**How To Use This Grid Reference Index**


The first digit in the PCB layout reference is a "1" or "2", indicating the top or bottom side layout respectively, and the last two characters give the location of the component on that diagram.

The first digit in the circuit diagram reference is the sheet number, and the last two characters give the location of the component on that sheet.

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
C201	1:C1	2-B8	C304	1:F8	3-C7	C677	1:L6	6-P1	C826	1:N3	8-C0
C202	1:C1	2-C8	C305	1:F8	3-D7	C681	1:M5	6-R3	C827	1:N3	8-D0
C204	1:A2	2-E8	C306	1:F8	3-E6	C684	1:M6	6-R3	C828	1:N3	8-E0
C205	1:A2	2-E8	C307	1:F8	3-E7	C687	1:L6	6-Q1	C830	1:N3	8-R1
C207	1:C7	2-B6	C308	1:F8	3-G8	C690	1:L6	6-R1	C838	1:N4	8-F0
C209	1:C6	2-D6	C310	1:F5	3-B4	C693	1:L6	6-R1	C841	1:N2	8-K2
C210	1:C7	2-K0	C311	1:F4	3-C1	C700	1:K4	7-A8	C844	1:M2	8-L2
C211	1:B7	2-F8	C312	1:F5	3-D3	C703	1:J3	7-B7	C910	1:P7	9-E6
C213	1:B6	2-G8	C313	1:F4	3-D1	C705	1:J3	7-B7	C920	1:P7	9-G6
C215	1:B6	2-G8	C314	1:F4	3-E4	C706	1:J2	7-B5	C930	1:P6	9-H6
C217	1:C6	2-H8	#C315	1:F4	3-E3	%C707	1:K4	7-C8			
C219	1:C6	2-H7	#C316	1:E4	3-F3	C708	1:J2	7-C9	D111	1:P4	1-R1
C221	1:D5	2-G6	C317	1:F7	3-H5	C709	1:K4	7-D9	D201	1:F5	3-C3
C223	1:C5	2-J6	C318	1:F7	3-H5	C710	1:J3	7-E8	D202	1:F5	3-C4
C225	1:C3	2-K7	C319	1:F5	3-H4	C712	1:H2	7-E7	D203	1:F4	3-D3
C227	1:B4	2-K7	C320	1:E5	3-J4	%C713	1:H2	7-E6	%D205	1:B2	2-D9
C229	1:B3	2-L7	#C321	1:E5	3-H4	C720	1:J3	7-F8	%D210	1:B2	2-E9
C230	1:B4	2-J0	#C322	1:E6	3-J3	C722	1:J4	7-G8	D220	1:B4	2-P7
C232	1:A4	2-M7	C323	1:E6	3-L3	C724	1:J4	7-H6	D220	1:B4	2-P6
C233	1:A5	2-N7	C324	1:F7	3-M5	C725	1:J4	7-J6	D230	1:B7	2-R5
C235	1:B5	2-K5	C325	1:F7	3-N5	C726	1:K4	7-J6	D240	1:D4	2-C4
C237	1:C4	2-K5	#C326	1:E8	3-M4	C727	1:J3	7-J8	D240	1:D4	2-B2
C239	1:C4	2-L4	#C327	1:E8	3-M3	C729	1:H3	7-M8	D250	1:D3	2-E2
C241	1:B4	2-M6	C328	1:E4	3-G1	%C733	1:J3	7-M5	D250	1:D3	2-D3
C242	1:B4	2-L6	C329	1:E4	3-H2	C735	1:J2	7-A1	D260	1:C2	2-C2
C243	1:B4	2-P6	C330	1:E3	3-J2	C736	1:J2	7-B1	D260	1:C2	2-C2
C245	1:C5	2-A4	C331	1:E3	3-K2	C740A	1:H2	7-B4	D270	1:D2	2-C1
C247	1:D4	2-B4	C332	1:E4	3-L2	C740B	1:H2	7-B3	D270	1:D2	2-C1
C249	1:D4	2-C4	C333	1:E3	3-J0	C741A	1:H2	7-C4	D510	1:K6	5-K8
C251	1:C3	2-E4	C340	1:E9	3-P2	C741B	1:G2	7-C3	D510	1:K6	5-K8
C253	1:D3	2-E3	C341	1:E8	3-P2	C742A	1:H2	7-D4	D610	1:N6	6-L6
C255	1:D3	2-D2	C342	1:E8	3-R3	C742B	1:H3	7-D3	D610	1:N6	6-K6
C257	1:D3	2-F2	C354	1:E3	3-R1	C743	1:H2	7-B1	D620	1:N4	6-B1
C259	1:C6	2-J2	C503	1:K6	5-L9	C745	1:G3	7-D1	D620	1:N4	6-B2
C260	1:D8	2-H0	C505	1:K6	5-M6	C750	1:H4	7-Q7	D630	1:M5	6-G2
C261	1:C6	2-K2	C510	1:J5	5-C0	C757	1:G4	7-F5	D630	1:M5	6-G3
C263	1:D6	2-L3	C513	1:H5	5-G2	C759	1:G4	7-G4	D635	1:M4	6-G3
C265	1:D6	2-N4	C535	1:K5	5-M2	C761	1:G3	7-J4	D640	1:L5	6-M1
C267	1:C8	2-P3	C550	1:K4	5-L0	C762	1:G3	7-J4	D640	1:L5	6-M2
&C269	1:C8	2-P3	C605	1:L6	6-D8	C764	1:H3	7-H2	D710	1:J3	7-L8
C271	1:C8	2-Q3	C610A	1:M5	6-F8	C765	1:G3	7-J2	D710	1:J3	7-L8
C273	1:C8	2-Q4	C610B	1:M5	6-G8	C767	1:H3	7-K3	D720	1:H3	7-P8
C275	1:D3	2-E1	C611A	1:L5	6-H8	C769	1:H4	7-M4	D720	1:H3	7-P8
C277	1:C4	2-G1	C611B	1:M5	6-J8	C770	1:H4	7-N4	D730	1:H3	7-H1
C279	1:B4	2-G1	C623	1:M6	6-N8	C772	1:G4	7-M2	D740	1:H3	7-J2
C281	1:B5	2-J1	C625	1:M6	6-Q8	C774	1:H4	7-P2	D810	1:M2	8-B7
C283	1:B5	2-K0	C626	1:M6	6-R8	C776	1:H4	7-N1			
C285	1:D7	2-L0	C628	1:M6	6-R8	C782	1:G2	7-N1	IC210	1:C7	2-J0
C287	1:C6	2-M1	C630	1:M5	6-K5	C784	1:G2	7-R1	IC210	1:C7	2-Q0
C289	1:C8	2-N1	C631A	1:M5	6-M6	C786	1:G2	7-R1	IC210	1:C7	2-K2
C291	1:D7	2-P1	C634	1:N5	6-M4	C788	1:G3	7-P0	IC210	1:C7	2-L1
C293	1:D7	2-Q1	C636	1:M5	6-M4	C790	1:G3	7-R0	IC210	1:C7	2-C6
%C294	1:D7	2-Q0	C638	1:M6	6-P5	C792	1:G4	7-R0	IC220	1:D6	2-P0
%C295	1:D6	2-Q0	C640	1:M5	6-R6	C810	1:L3	8-K8	IC220	1:D6	2-M3
C300A	1:F9	3-J8	C655	1:M4	6-C1	C812	1:L2	8-F5	IC220	1:D6	2-D5
C300B	1:F8	3-K8	C660	1:L5	6-K1	C813	1:K2	8-H5	IC230	1:B4	2-H0
C301	1:E9	3-B8	C665	1:L5	6-K1	C822	1:M2	8-B2	IC230	1:B4	2-J0
C302	1:E8	3-B7	C670	1:L6	6-L1	C823	1:M3	8-C2	IC230	1:B4	2-L5
C303	1:E9	3-C8	C673	1:L5	6-P2	C824	1:M2	8-C1	IC230	1:B4	2-N6

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
IC230	1:B4	2-G1	P235	1:C1	2-R9	Q820	1:L2	8-D5	R284	1:D7	2-L0
IC240	1:D4	2-F3	P237	1:B7	2-R8	Q830	1:L2	8-D5	R285	1:C8	2-M0
IC250	1:D3	2-E1	P239	1:C7	2-R8	Q840	1:L2	8-F5	R286	1:C7	2-M0
IC260	1:D8	2-N0	P240	1:C7	2-R8	Q850	1:M2	8-G5	R287	1:D9	2-M0
IC260	1:D8	2-H0	P243	1:B7	2-R7	Q860	1:L4	8-B3	R288	1:C6	2-M2
IC260	1:D8	2-Q2	P244	1:B7	2-R7				R289	1:D9	2-M0
IC260	1:D8	2-Q3	P245	1:B8	2-R6	%R150	1:P2	1-R4	R290	1:C8	2-N2
IC260	1:D8	2-N3	P247	1:B8	2-R6	R160	1:P2	1-R3	R291	1:C8	2-N1
IC300	1:F8	3-D7	P248	1:B7	2-R6	R201	1:B2	2-E9	R292	1:D8	2-Q2
IC300	1:F8	3-J8	P249	1:C7	2-R5	R202	1:C1	2-F9	R293	1:D9	2-Q2
IC300	1:F8	3-L0	P251	1:C7	2-R5	R204	1:C7	2-B6	R294	1:D9	2-Q1
IC610	1:M5	6-G8	P255	1:D4	2-R4	R205	1:C7	2-D6	R295	1:D8	2-R1
IC630	1:N5	6-K5	P257	1:C2	2-R4	R206	1:B7	2-G8	R296	1:D6	2-P0
IC640	1:M5	6-F1	P259	1:B8	2-R3	R207	1:B6	2-G8	R297	1:D7	2-P1
IC640	1:M5	6-Q6	P261	1:B8	2-R3	R208	1:B6	2-G8	%R298	1:D7	2-Q0
IC640	1:M5	6-N6	P263	1:B2	2-R2	R209	1:C6	2-H8	R299	1:C7	2-R0
IC650	1:L5	6-F4	P267	1:C8	2-N2	R210	1:B6	2-H7	R300	1:F8	3-J8
=IC700	1:K3	7-A8	P269	1:D8	2-P2	R212	1:D4	2-F6	R301	1:E8	3-B8
IC710	1:J2	7-E8	P271	1:C9	2-N1	R213	1:C4	2-G6	R302	1:E8	3-A7
IC710	1:J2	7-C6	P273	1:D9	2-P0	R214	1:D4	2-G6	R303	1:E8	3-B7
IC710	1:J2	7-G0	P275	1:D7	2-Q0	R215	1:C4	2-H6	R304	1:F8	3-B8
IC710	1:J2	7-D6	P805	1:M2	8-A7	R216	1:C3	2-K7	R305	1:F8	3-C7
IC710	1:J2	7-D7	P810	1:L3	8-A5	R217	1:A4	2-M8	R306	1:F8	3-D5
IC710	1:J2	7-D6	P820	1:L4	8-M8	R218	1:A4	2-N7	R307	1:F8	3-D5
IC710	1:J2	7-C6	P825	1:L4	8-M8	R219	1:B4	2-N8	R308	1:F8	3-E7
IC720	1:J3	7-P6	P830	1:L4	8-M8	R221	1:B7	2-R7	R309	1:F8	3-D5
IC720	1:J3	7-J0	P835	1:L4	8-M7	R223	1:B4	2-K6	R310	1:F8	3-E6
IC720	1:J3	7-N7	P840	1:L4	8-M7	R224	1:C4	2-K5	R311	1:F8	3-F6
IC720	1:J3	7-M7	PL100	1:P3	1-F0	R225	1:B4	2-L5	R312	1:F8	3-F8
IC720	1:J3	7-K7	PL205	1:C5	2-J8	R226	1:B4	2-L4	R313	1:F8	3-F8
IC720	1:J3	7-F8	PL210	1:C3	2-H4	R227	1:B4	2-M4	R314	1:F8	3-G6
IC720	1:J3	7-K0	PL215	1:C4	2-K3	R229	1:B4	2-M7	R323	1:F5	3-C3
IC730	1:J4	7-H8	PL220	1:C4	2-H2	R230	1:B4	2-M6	R324	1:F4	3-C2
IC730	1:J4	7-G7				R231	1:B4	2-M6	R325	1:F4	3-D2
IC740	1:H2	7-D1	Q210	1:C6	2-J8	R232	1:B4	2-M5	R326	1:E4	3-F3
IC750	1:H4	7-M3	Q220	1:B3	2-L7	R233	1:B4	2-M6	R327	1:E4	3-G3
IC750	1:H4	7-H5	Q230	1:A4	2-M8	R235	1:B4	2-P6	R328	1:F5	3-G4
IC750	1:H4	7-Q7	Q240	1:B7	2-Q7	R237	1:B7	2-Q7	R329	1:F7	3-H5
IC820	1:L4	8-N2	Q250	1:B7	2-R5	R238	1:B7	2-R7	#R330	1:E5	3-H3
IC830	1:N3	8-J0	Q260	1:C4	2-F3	R239	1:B8	2-R6	#R331	1:E5	3-H4
IC830	1:N3	8-Q1	Q270	1:D2	2-D1	R241	1:B8	2-Q6	#R332	1:E6	3-J3
IC830	1:N3	8-J0	Q301	1:E8	3-B7	R242	1:B7	2-Q5	R333	1:E6	3-K3
IC830	1:N3	8-C0	Q302	1:F8	3-F7	R244	1:C6	2-A5	R334	1:E7	3-L4
IC830	1:N3	8-J1	Q303	1:F8	3-G8	R245	1:D4	2-D4	R335	1:F7	3-M5
			Q304	1:E5	3-G4	R247	1:D3	2-E4	R340	1:E4	3-G1
L300	1:F5	3-G5	Q305	2:E6	3-L4	R248	1:C3	2-E3	R341	1:E4	3-H1
L302	1:F5	3-C3	Q306	1:E4	3-G1	R249	1:D4	2-F3	R342	1:E3	3-J2
L303	1:F7	3-M5	Q307	1:E3	3-H2	R251	1:C4	2-G4	R343	1:E3	3-K1
L305	1:F4	3-E3	Q308	1:E3	3-K2	R253	1:C6	2-J2	R344	1:E3	3-K2
L306	1:F4	3-E4	Q309	1:E3	3-J0	R254	1:C6	2-K3	R345	1:E4	3-K2
#L307	1:F5	3-H4	Q310	1:E9	3-Q2	R255	1:C7	2-K2	R346	1:E3	3-H0
L307	1:F4	3-F4	Q311	1:E9	3-Q3	R256	1:D8	2-M3	R347	1:E3	3-J1
L308	1:E6	3-J4	Q505	1:K5	5-J8	R257	1:D8	2-N5	R348	1:D3	3-J0
L309	1:E6	3-K3	Q510	1:J5	5-D1	R258	1:D8	2-N4	R349	1:E3	3-J0
L310	1:E6	3-L4	Q520	1:J5	5-H2	R259	1:D5	2-P4	R355	1:E8	3-P2
L312	1:E7	3-M4	Q530	1:J5	5-H0	R260	1:D8	2-N4	R356	1:E9	3-P3
#L313	1:E7	3-M4	Q540	1:K5	5-L2	R262	1:D8	2-N3	R357	1:E8	3-P2
L314	1:E8	3-R4	Q550	1:K5	5-L0	R263	1:C8	2-P3	R358	1:E8	3-Q2
L750	1:G3	7-Q0	Q610	1:L6	6-E8	&R264	1:C8	2-P3	R359	1:E8	3-R3
L910	1:P7	9-F7	Q620	1:N6	6-P8	&R265	1:C8	2-P3	R501	1:K5	5-H8
L920	1:P7	9-H7	Q630	1:M6	6-P5	&R266	1:C8	2-P3	R502	1:K5	5-J8
LK302	1:E3	3-J0	Q660	1:L5	6-N1	R267	1:C8	2-R2	R503	1:K5	5-J8
			Q670	1:L6	6-Q2	R268	1:D2	2-C0	R504	1:K6	5-K9
P100	1:P6	1-R8	Q710	1:J3	7-K8	R269	1:C2	2-C1	R505	1:K6	5-L8
P150	1:P2	1-Q4	Q720	1:J3	7-K8	R270	1:C2	2-D1	R510	1:K6	5-L7
P160	1:P2	1-Q4	Q730	1:H3	7-N8	R271	1:C3	2-E1	R514	1:K6	5-M5
P170	1:P2	1-Q3	Q740	1:H3	7-N8	R272	1:C4	2-F2	R515	1:H6	5-J5
P204	1:D1	2-A8	Q750	1:G4	7-F3	R273	1:B5	2-G2	R517	1:G5	5-E2
P208	1:D1	2-A8	Q760	1:H3	7-H3	R274	1:C4	2-G1	R518	1:G5	5-F2
P215	1:D4	2-A2	Q770	1:H3	7-H1	R275	1:C4	2-H0	R519	1:G5	5-F2
P217	1:D4	2-A2	Q775	1:H3	7-K3	R277	1:B5	2-J1	R520	1:J5	5-C1
P219	1:D2	2-A1	Q780	1:H3	7-K3	R278	1:B5	2-J0	R525	1:J5	5-D1
P225	1:D2	2-A0	Q785	1:H3	7-K2	R279	1:B5	2-K0	R530	1:J5	5-D0
P230	1:C5	2-B0	Q790	1:H4	7-L3	R280	1:B5	2-K0	R535	1:J5	5-E1
P231	1:D8	2-B0	Q795	1:G3	7-P0	R282	1:D7	2-K1	R540	1:K5	5-H2
P233	1:C1	2-R9	Q810	1:M2	8-E7	R283	1:D7	2-L1	R545	1:K5	5-J1

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
R550	1:K5	5-K2	R777	1:H4	7-R2	SK310	1:E8	3-N4			
R555	1:K5	5-K1	R780	1:G2	7-P1	SK420	1:M8	1-M8			
R560	1:K5	5-M0	R782	1:G3	7-P1	SK501	1:G6	5-D6			
R609	1:L6	6-B8	R784	1:G3	7-P1	SK502	1:G6	5-D5			
R613	1:L6	6-C8	R785	1:G3	7-Q1	SK503	1:G6	5-D4			
R615	1:M5	6-F9	R786	1:G2	7-R1	SK504	1:G5	5-D3			
R617	1:M5	6-J8	R787	1:G2	7-R2	SK505	1:G5	5-D2			
R619	1:M6	6-L8	R790	1:G3	7-P0	SK513	1:H5	5-H3			
R621	1:M6	6-L8	R791	1:G3	7-Q0	SK522	1:H6	5-K5			
R625	1:N6	6-L7	R801	1:M2	8-D7	SK531	1:K6	5-N6			
R629	1:M5	6-P6	R802	1:M2	8-D7	SK532	1:K5	5-N5			
R633	1:M5	6-Q8	R808	1:L2	8-B4	SK533	1:K5	5-N4			
R637	1:N5	6-K6	R809	1:L2	8-D5	SK534	1:K5	5-N3			
R641	1:N5	6-L4	R810	1:L2	8-D6	SK535	1:K5	5-N2			
R645	1:N5	6-L5	R811	1:L2	8-E6	=SK710	1:K3	7-A7			
R649	1:M5	6-M5	R812	1:L2	8-D5	SK805	1:K3	8-Q9			
R653	1:M5	6-Q4	R813	1:L2	8-D4	SK805	1:K3	8-Q7			
R657	1:M5	6-D1	R815	1:L2	8-F4	SK805	1:K3	8-Q5			
R661	1:M5	6-E3	R816	1:L2	8-F4	SK805	1:K3	8-Q7			
R665	1:M5	6-E2	R818	1:M2	8-F5	SK805	1:K3	8-Q8			
R669	1:M5	6-E2	R819	1:M2	8-F5	SK805	1:K3	8-Q7			
R673	1:M5	6-E0	R821	1:M4	8-B3	SK805	1:K3	8-Q8			
R677	1:M4	6-F4	R822	1:M4	8-E3	SK805	1:K3	8-Q6			
R681	1:L5	6-L2	R824	1:L4	8-L8	SK805	1:K3	8-Q8			
R685	1:L5	6-N2	R825	1:L4	8-L8	SK805	1:K3	8-Q6			
R689	1:L6	6-Q3	R826	1:L4	8-L8	SK805	1:K3	8-Q9			
R693	1:L6	6-Q1	R827	1:L4	8-L7	SK805	1:K3	8-Q6			
R696	1:M6	6-Q1	R828	1:L4	8-L7	SK805	1:K3	8-Q9			
R701	1:K4	7-A9	R829	1:L4	8-P9	SK805	1:K3	8-Q7			
R702	1:K4	7-C9	R830	1:L3	8-P9	SK805	1:K3	8-Q8			
R703	1:J3	7-C8	R831	1:L3	8-P9	SK805	1:K3	8-Q6			
=R705	1:K3	7-A7	R832	1:L3	8-P8	SK810	1:M3	8-H5			
R706	1:J3	7-B6	R833	1:L3	8-P8						
R708	1:H3	7-C7	R835	1:L3	8-P8	SL201	2:D1	2-B9			
R710	1:H2	7-E7	R836	1:L3	8-P8	SL202	2:D1	2-B8			
R711	1:J2	7-B6	R837	1:L3	8-P7	SL203	2:D2	2-B1			
R712	1:J3	7-D9	R840	1:L3	8-P7	SL204	2:D2	2-B1			
R713	1:J4	7-F8	R841	1:L3	8-P7	SL501	2:J5	5-F0			
%R715	1:K4	7-H6	R842	1:L3	8-P6	SL810	1:M2	8-C7			
R717	1:J4	7-H7	R843	1:L3	8-P6						
R718	1:J4	7-H7	R845	1:M4	8-Q5	SW230	1:B8	2-B4			
R719	1:J4	7-J6	R846	1:K2	8-Q4						
R720	1:J3	7-K7	R847	1:K2	8-Q4	T210	1:B2	2-C8			
R721	1:J3	7-K9	R848	1:L2	8-J4	T610	1:L5	6-N2			
R722	1:J3	7-K8	R849	1:M4	8-Q3						
R723	1:H3	7-M7	R850	1:K2	8-Q4						
R725	1:J4	7-N7	R853	1:M4	8-N3						
%R726	1:J3	7-N6	R854	1:M4	8-N3						
R727	1:H3	7-N9	R855	1:M2	8-B0						
R728	1:H3	7-N8	R859	1:N2	8-C1						
R742	1:H2	7-B4	R861	1:N2	8-D1						
R743	1:H2	7-C5	R863	1:N3	8-E1						
R744	1:G2	7-D4	R865	1:N4	8-E0						
R746	1:H3	7-E4	R867	1:N3	8-E1						
R747	1:H3	7-E5	R871	1:N3	8-G2						
R748	1:J2	7-A1	R872	1:M4	8-H1						
R749	1:J2	7-B1	R873	1:N3	8-G1						
R750	1:H4	7-Q7	R874	1:N3	8-H0						
R752	1:G4	7-F5	R875	1:N3	8-G0						
R753	1:G4	7-F3	R876	1:N3	8-H0						
R754	1:G3	7-F3	R877	1:M2	8-K2						
R756	1:G3	7-G5	R879	1:N2	8-L3						
R757	1:G4	7-G4									
R758	1:H3	7-H4	RV210	1:B7	2-F9						
R759	1:H3	7-H4	RV220	1:A4	2-M6						
R760	1:H3	7-K4	RV805	1:N4	8-F1						
R762	1:H3	7-K4									
R763	1:H4	7-L4	SK200	1:D5	2-F0						
R765	1:H3	7-H2	SK200	1:D5	2-F0						
R766	1:G3	7-J3	SK200	1:D5	2-F0						
R767	1:H3	7-K2	SK200	1:D5	2-F0						
R769	1:H3	7-K3	SK200	1:D5	2-F0						
R771	1:H4	7-L3	SK200	1:D5	2-F0						
R772	1:G4	7-M2	SK200	1:D5	2-F0						
R774	1:H4	7-M3	SK200	1:D5	2-F0						
R775	1:H4	7-N2	SK205	1:B5	2-A5						

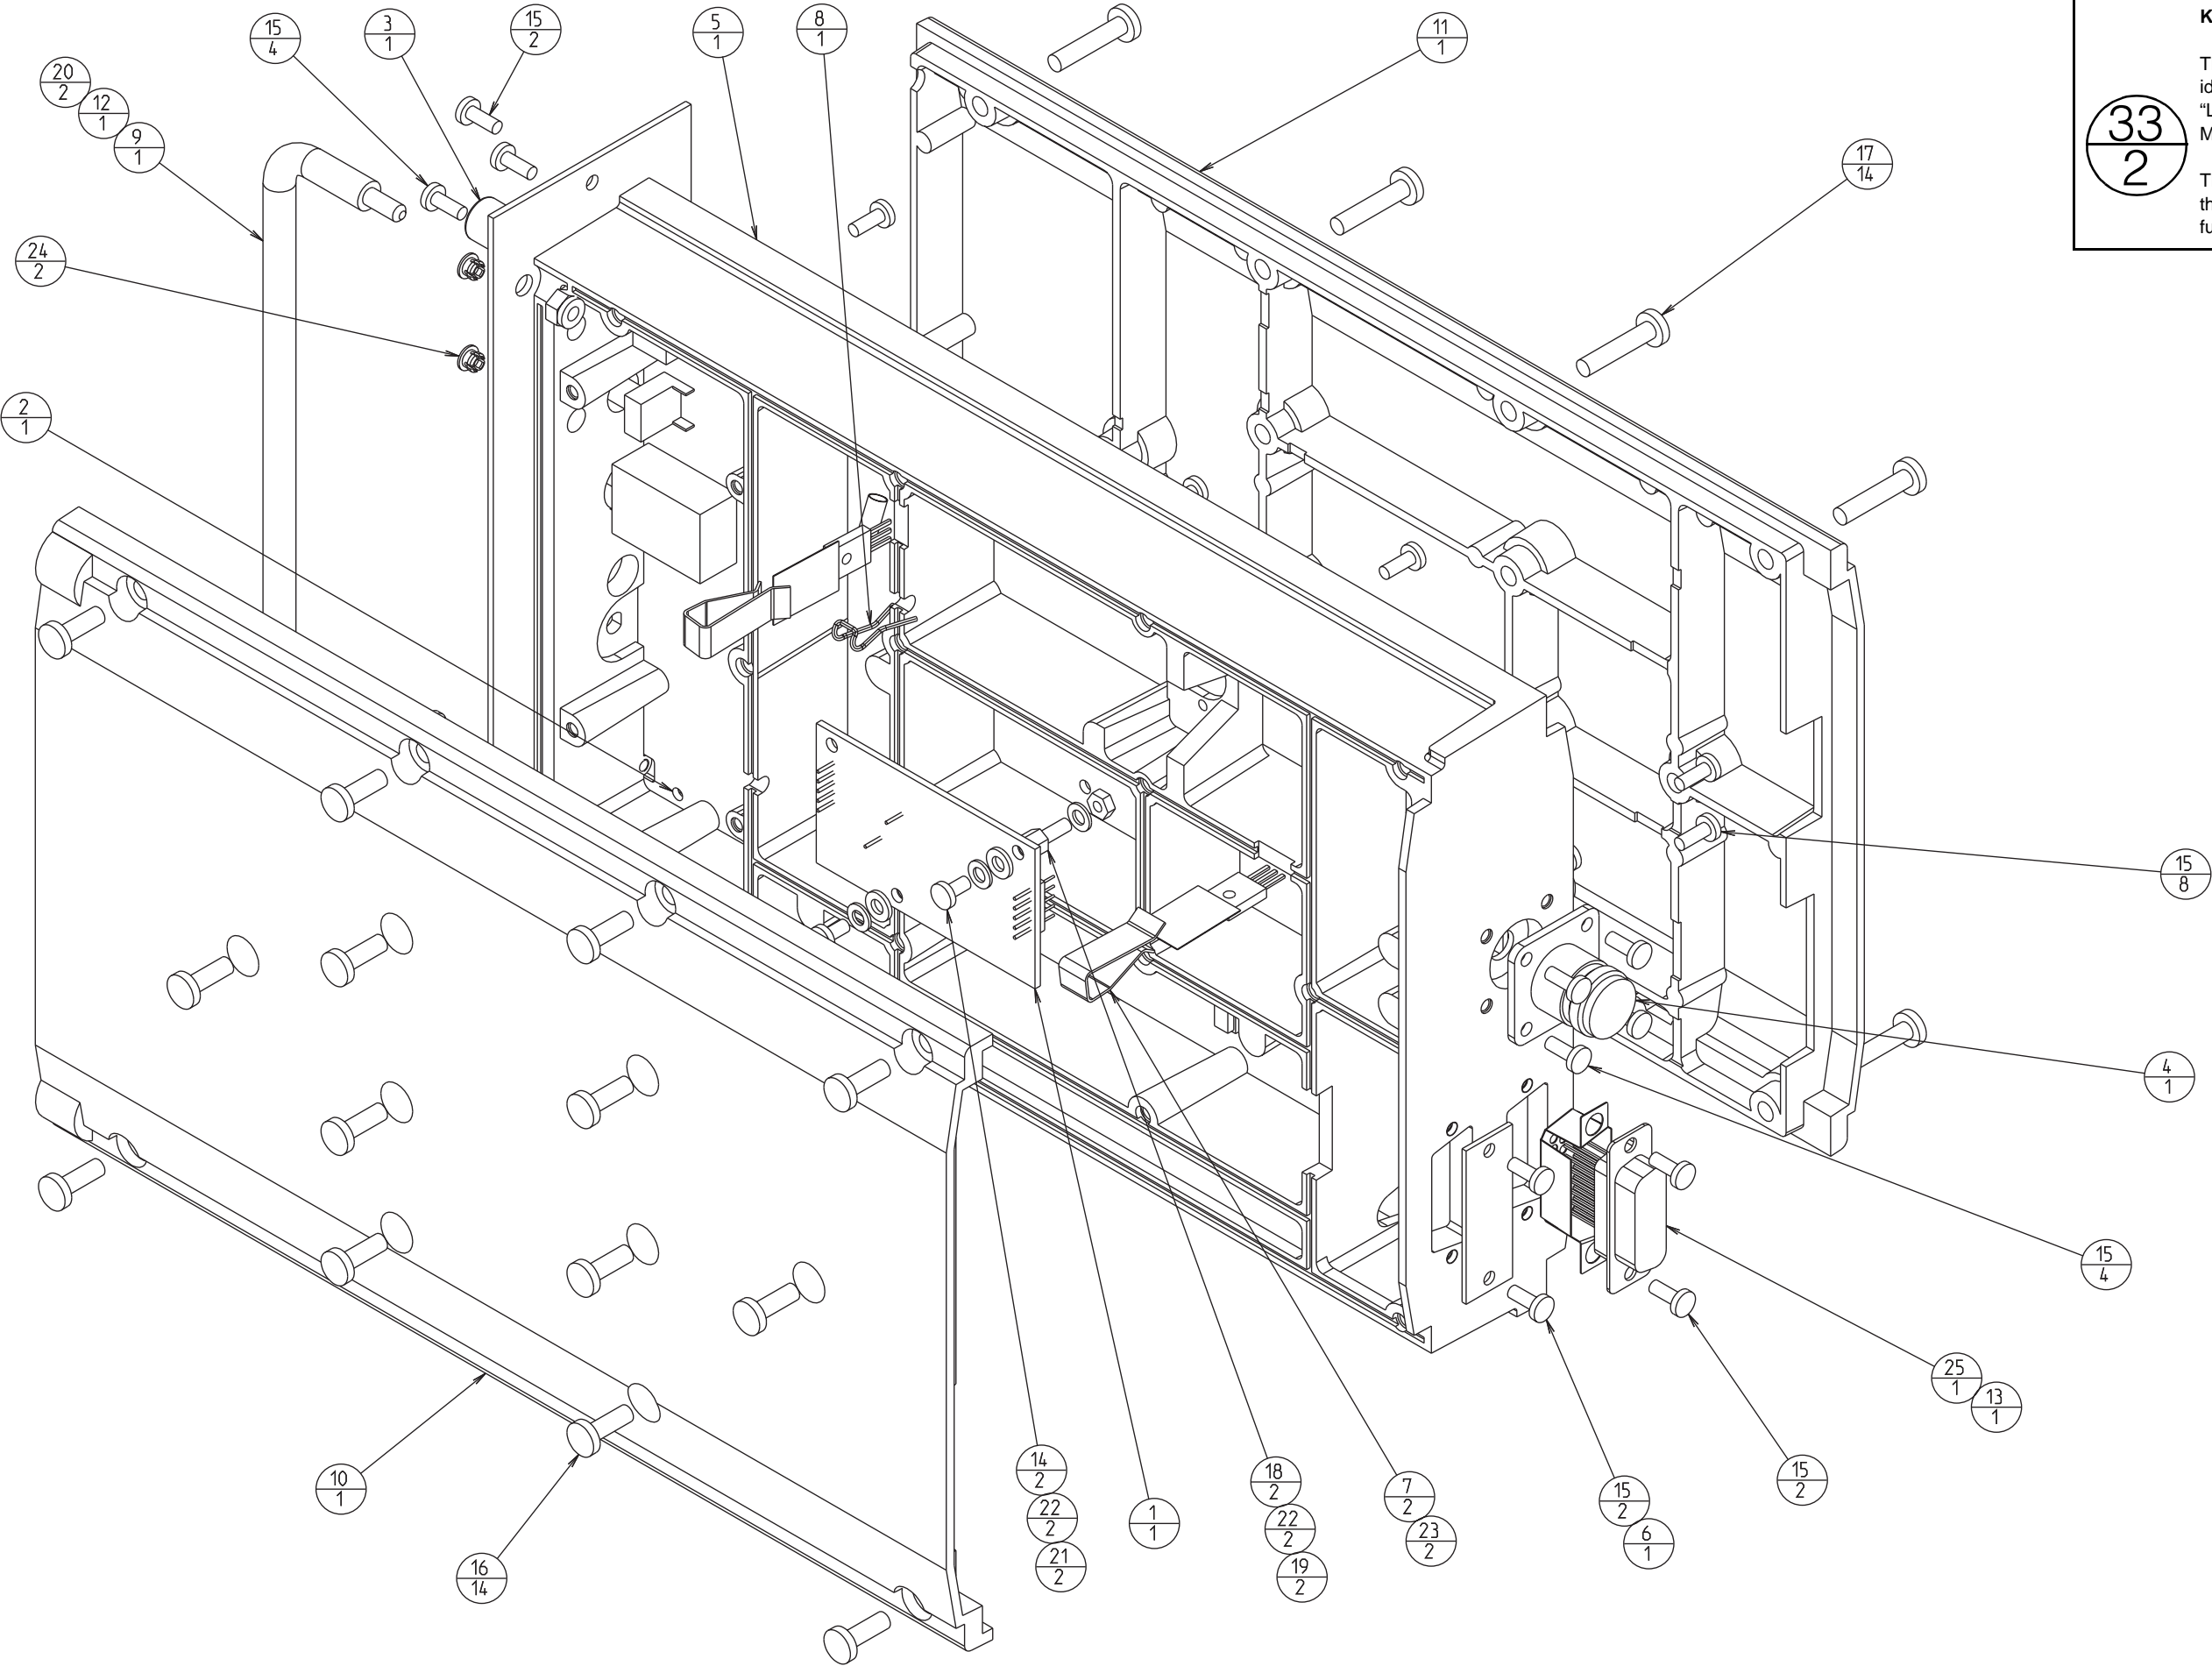


33
2


Key

The upper number is the component identification number which appears in the "Legend" column of the Mechanical & Miscellaneous Parts on the facing page.

The lower number indicates how many of this component are used in this location or function.





1/09/98

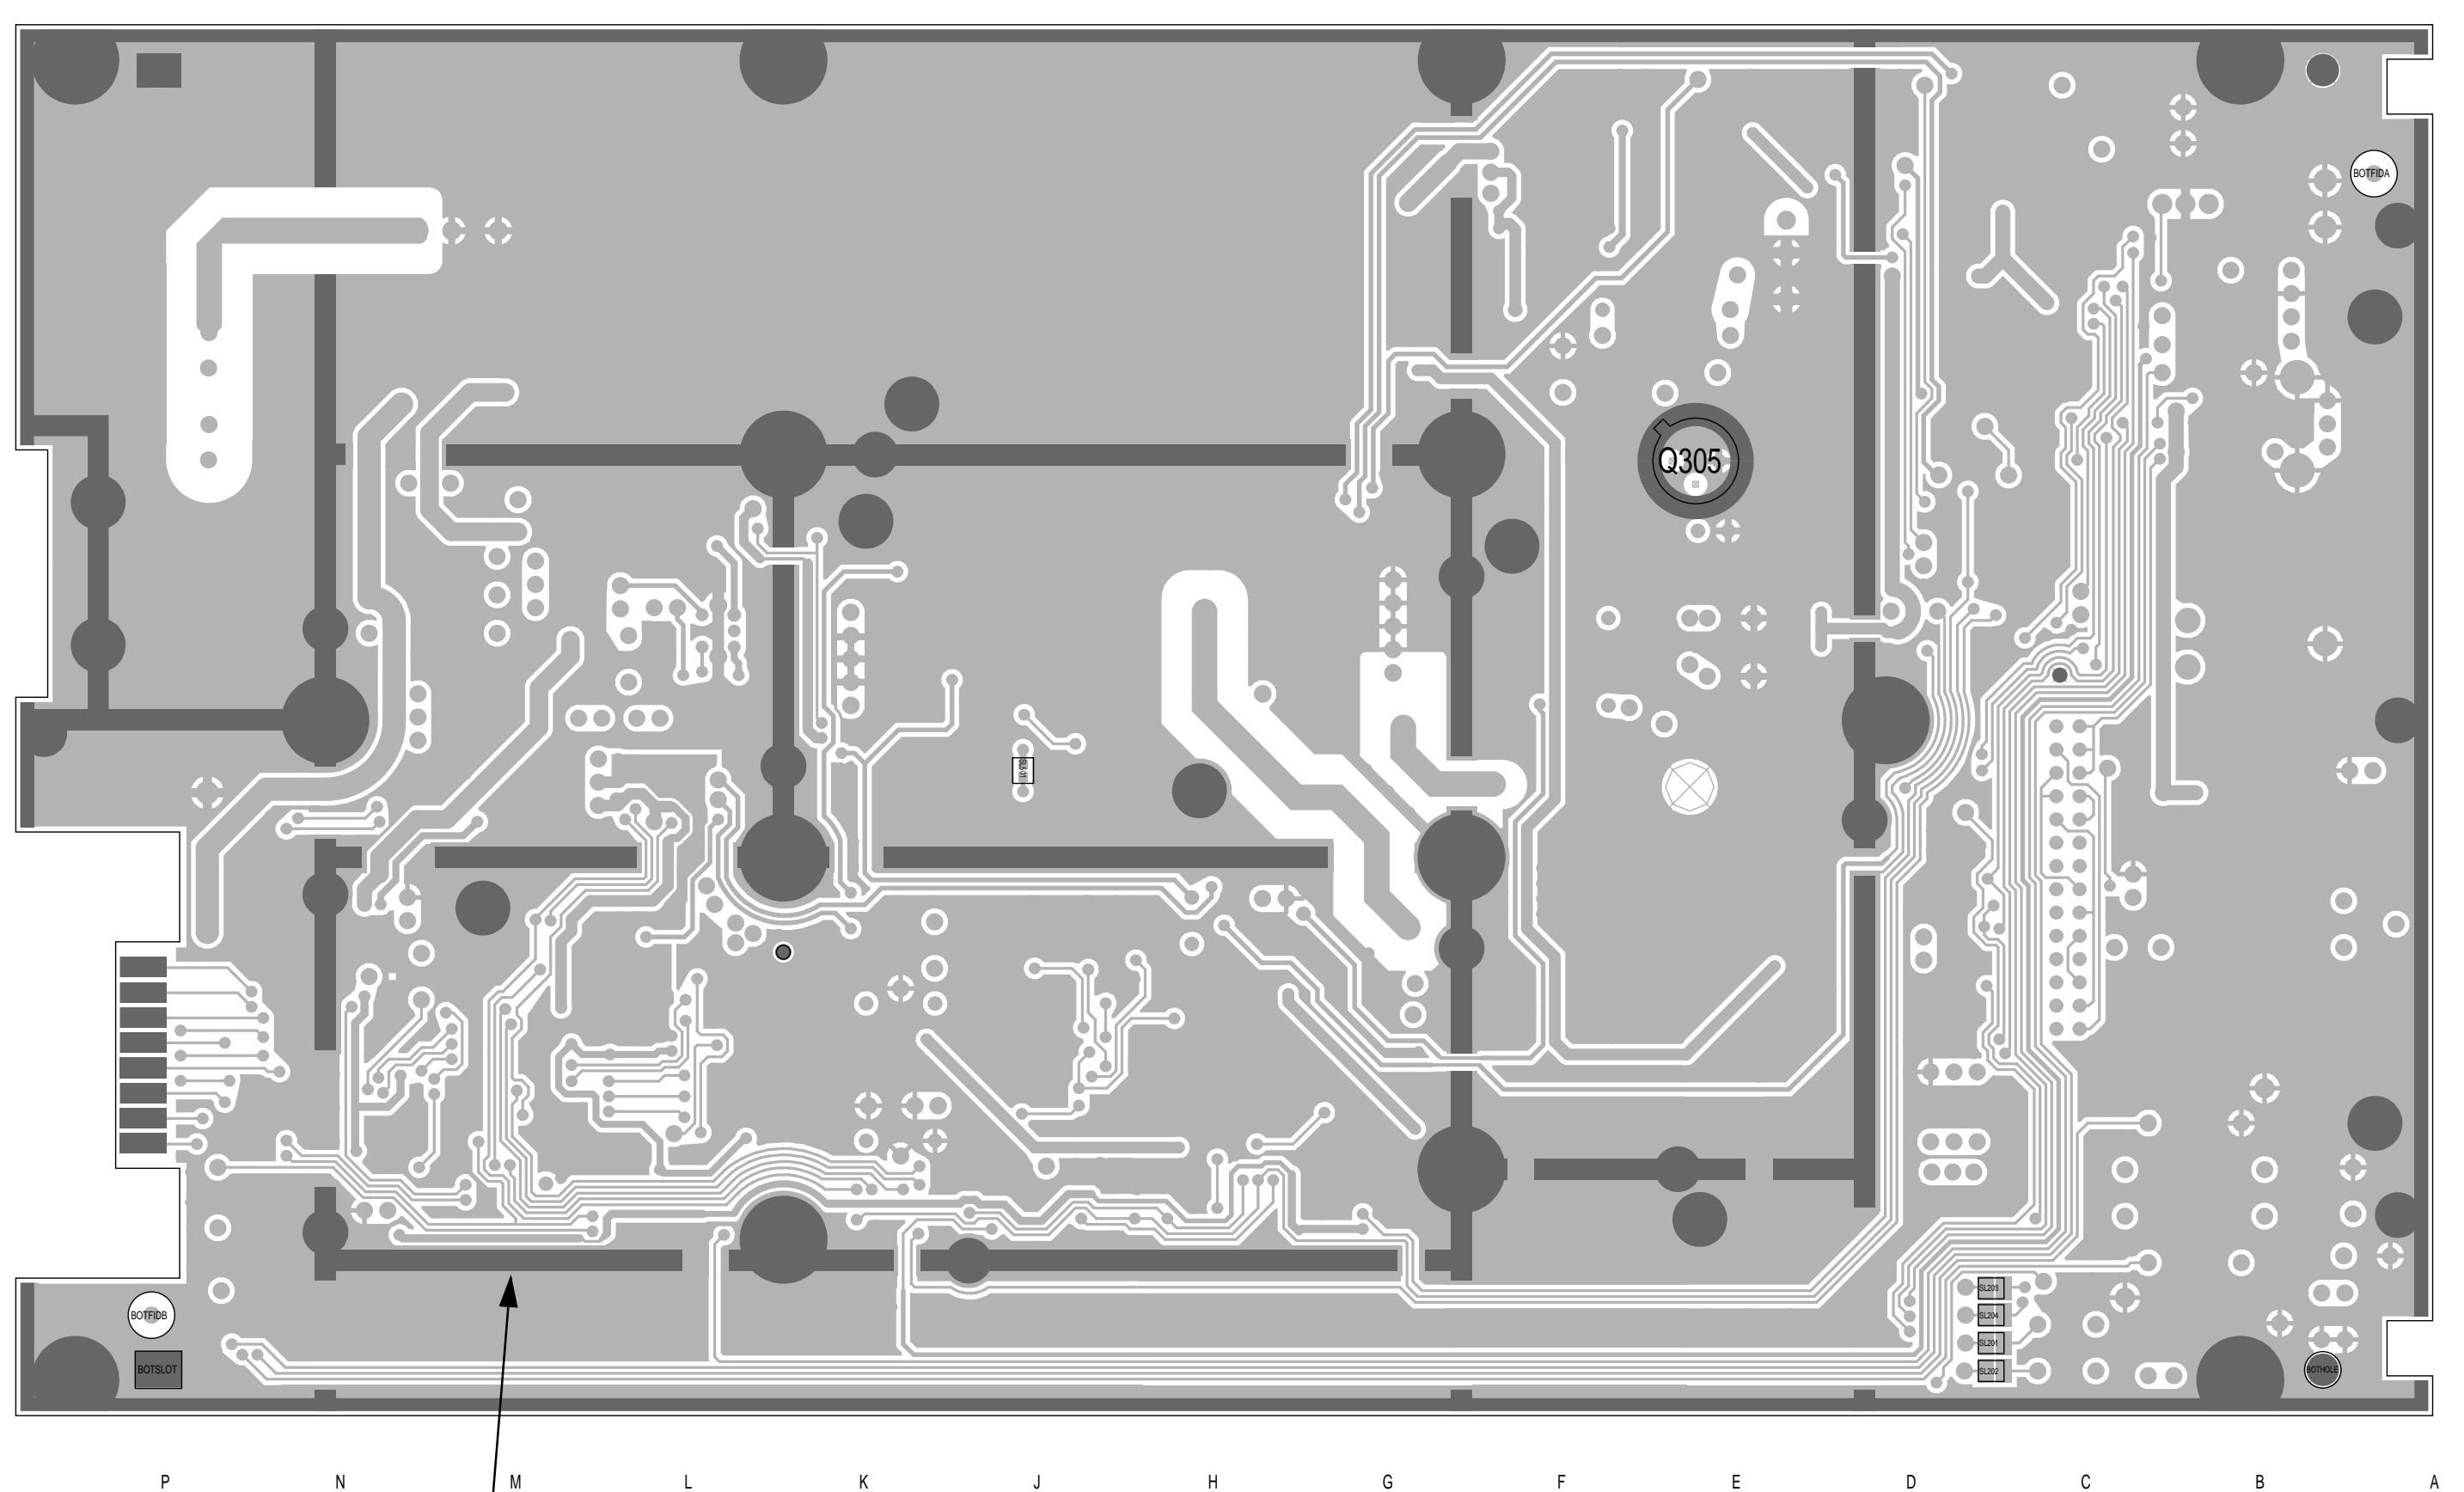


The darker shading shows the footprint of the bottom cover.


T857 PCB Layout - Bottom Side
220-01398-02




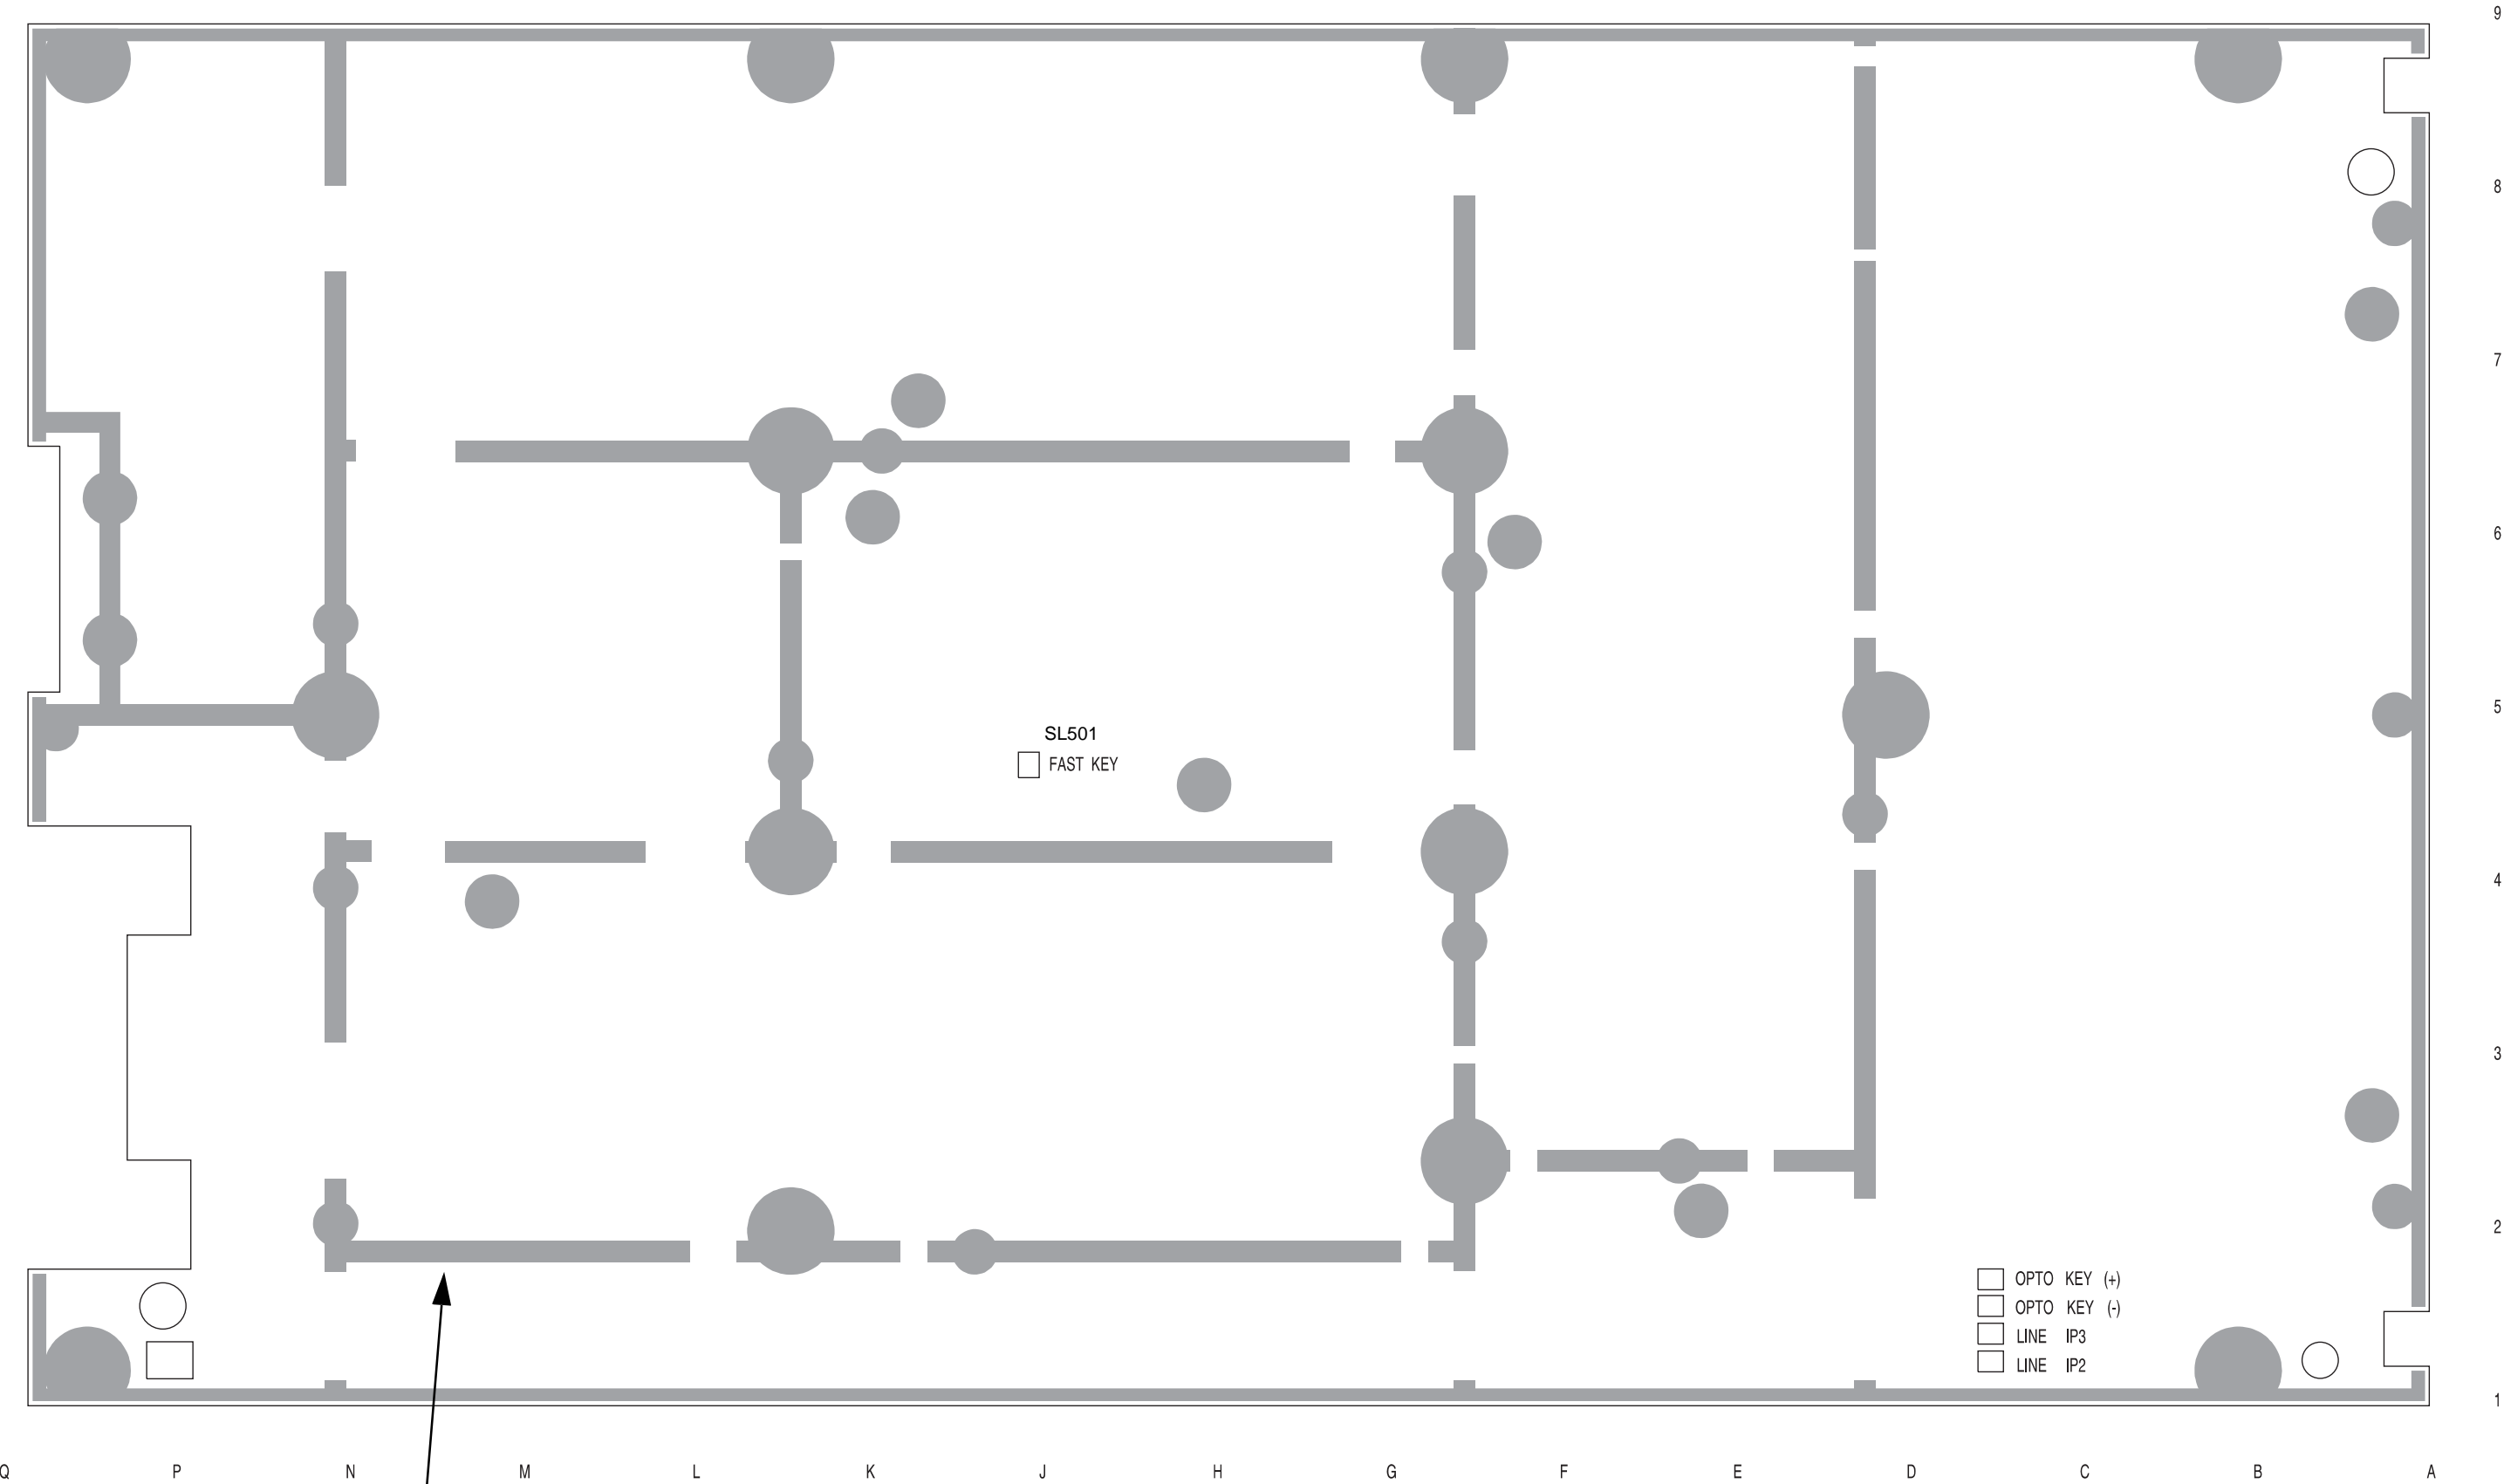


T857 Test Points & Options Connections - Bottom Side
220-01398-02

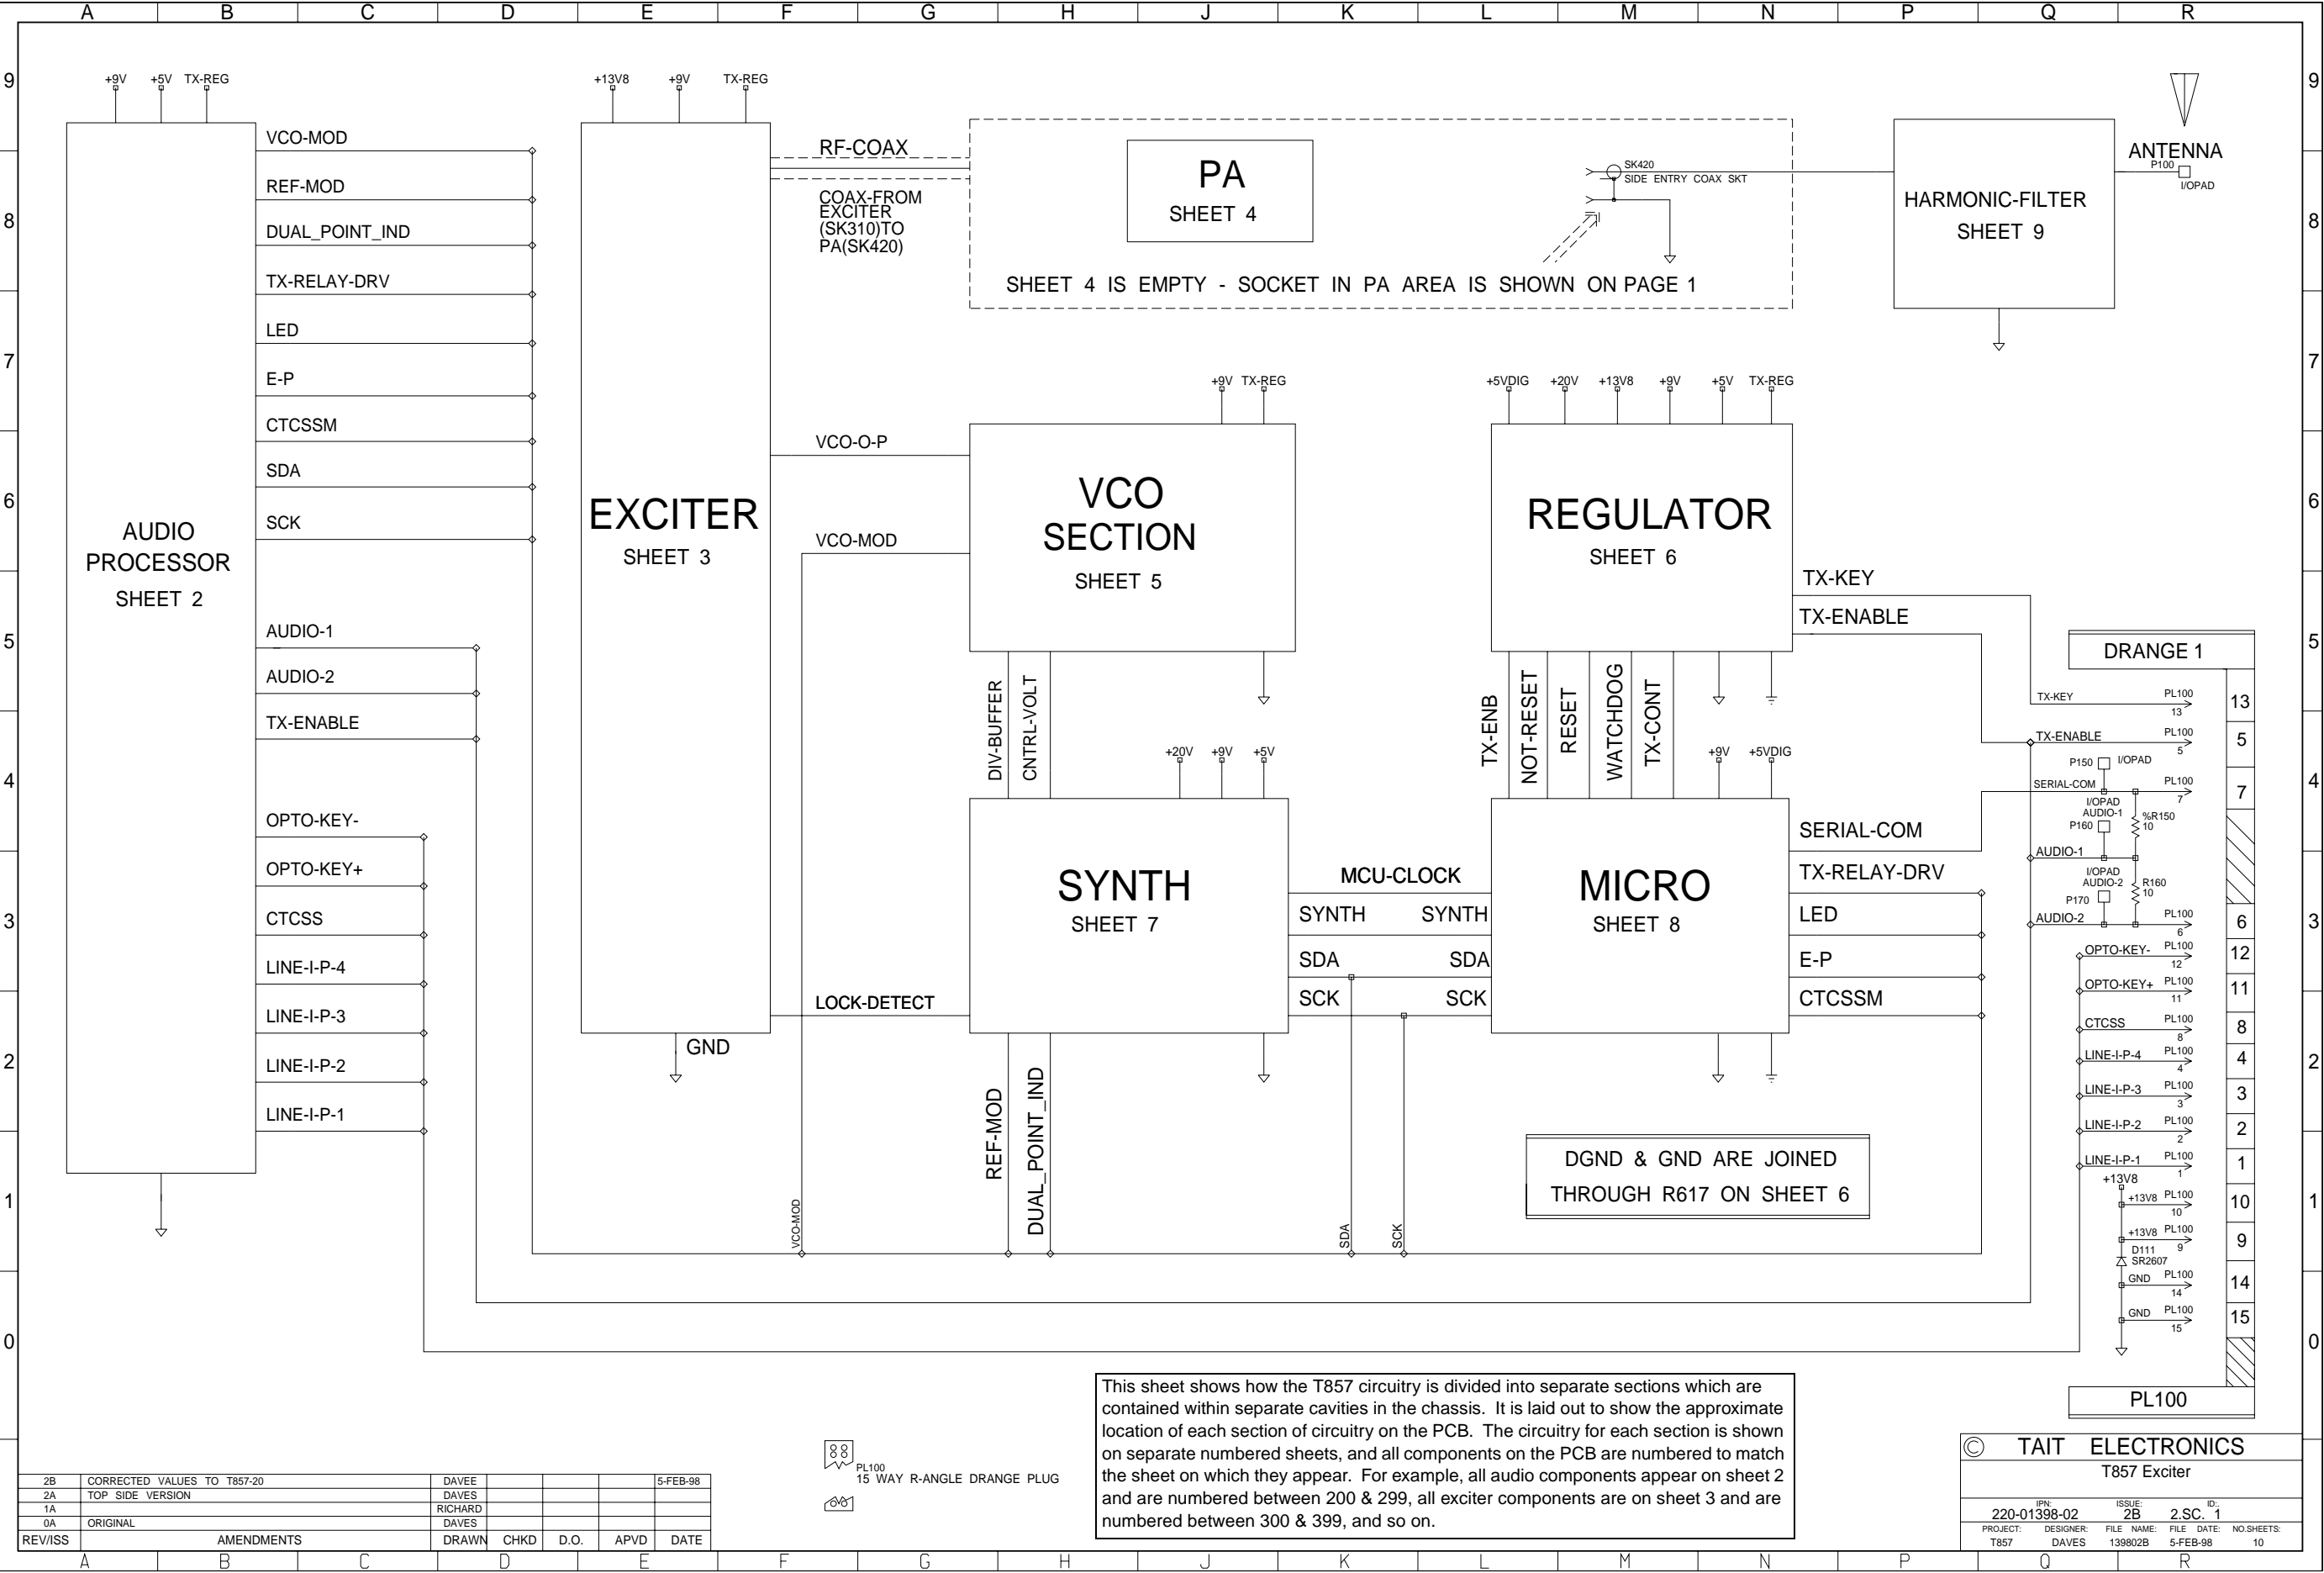


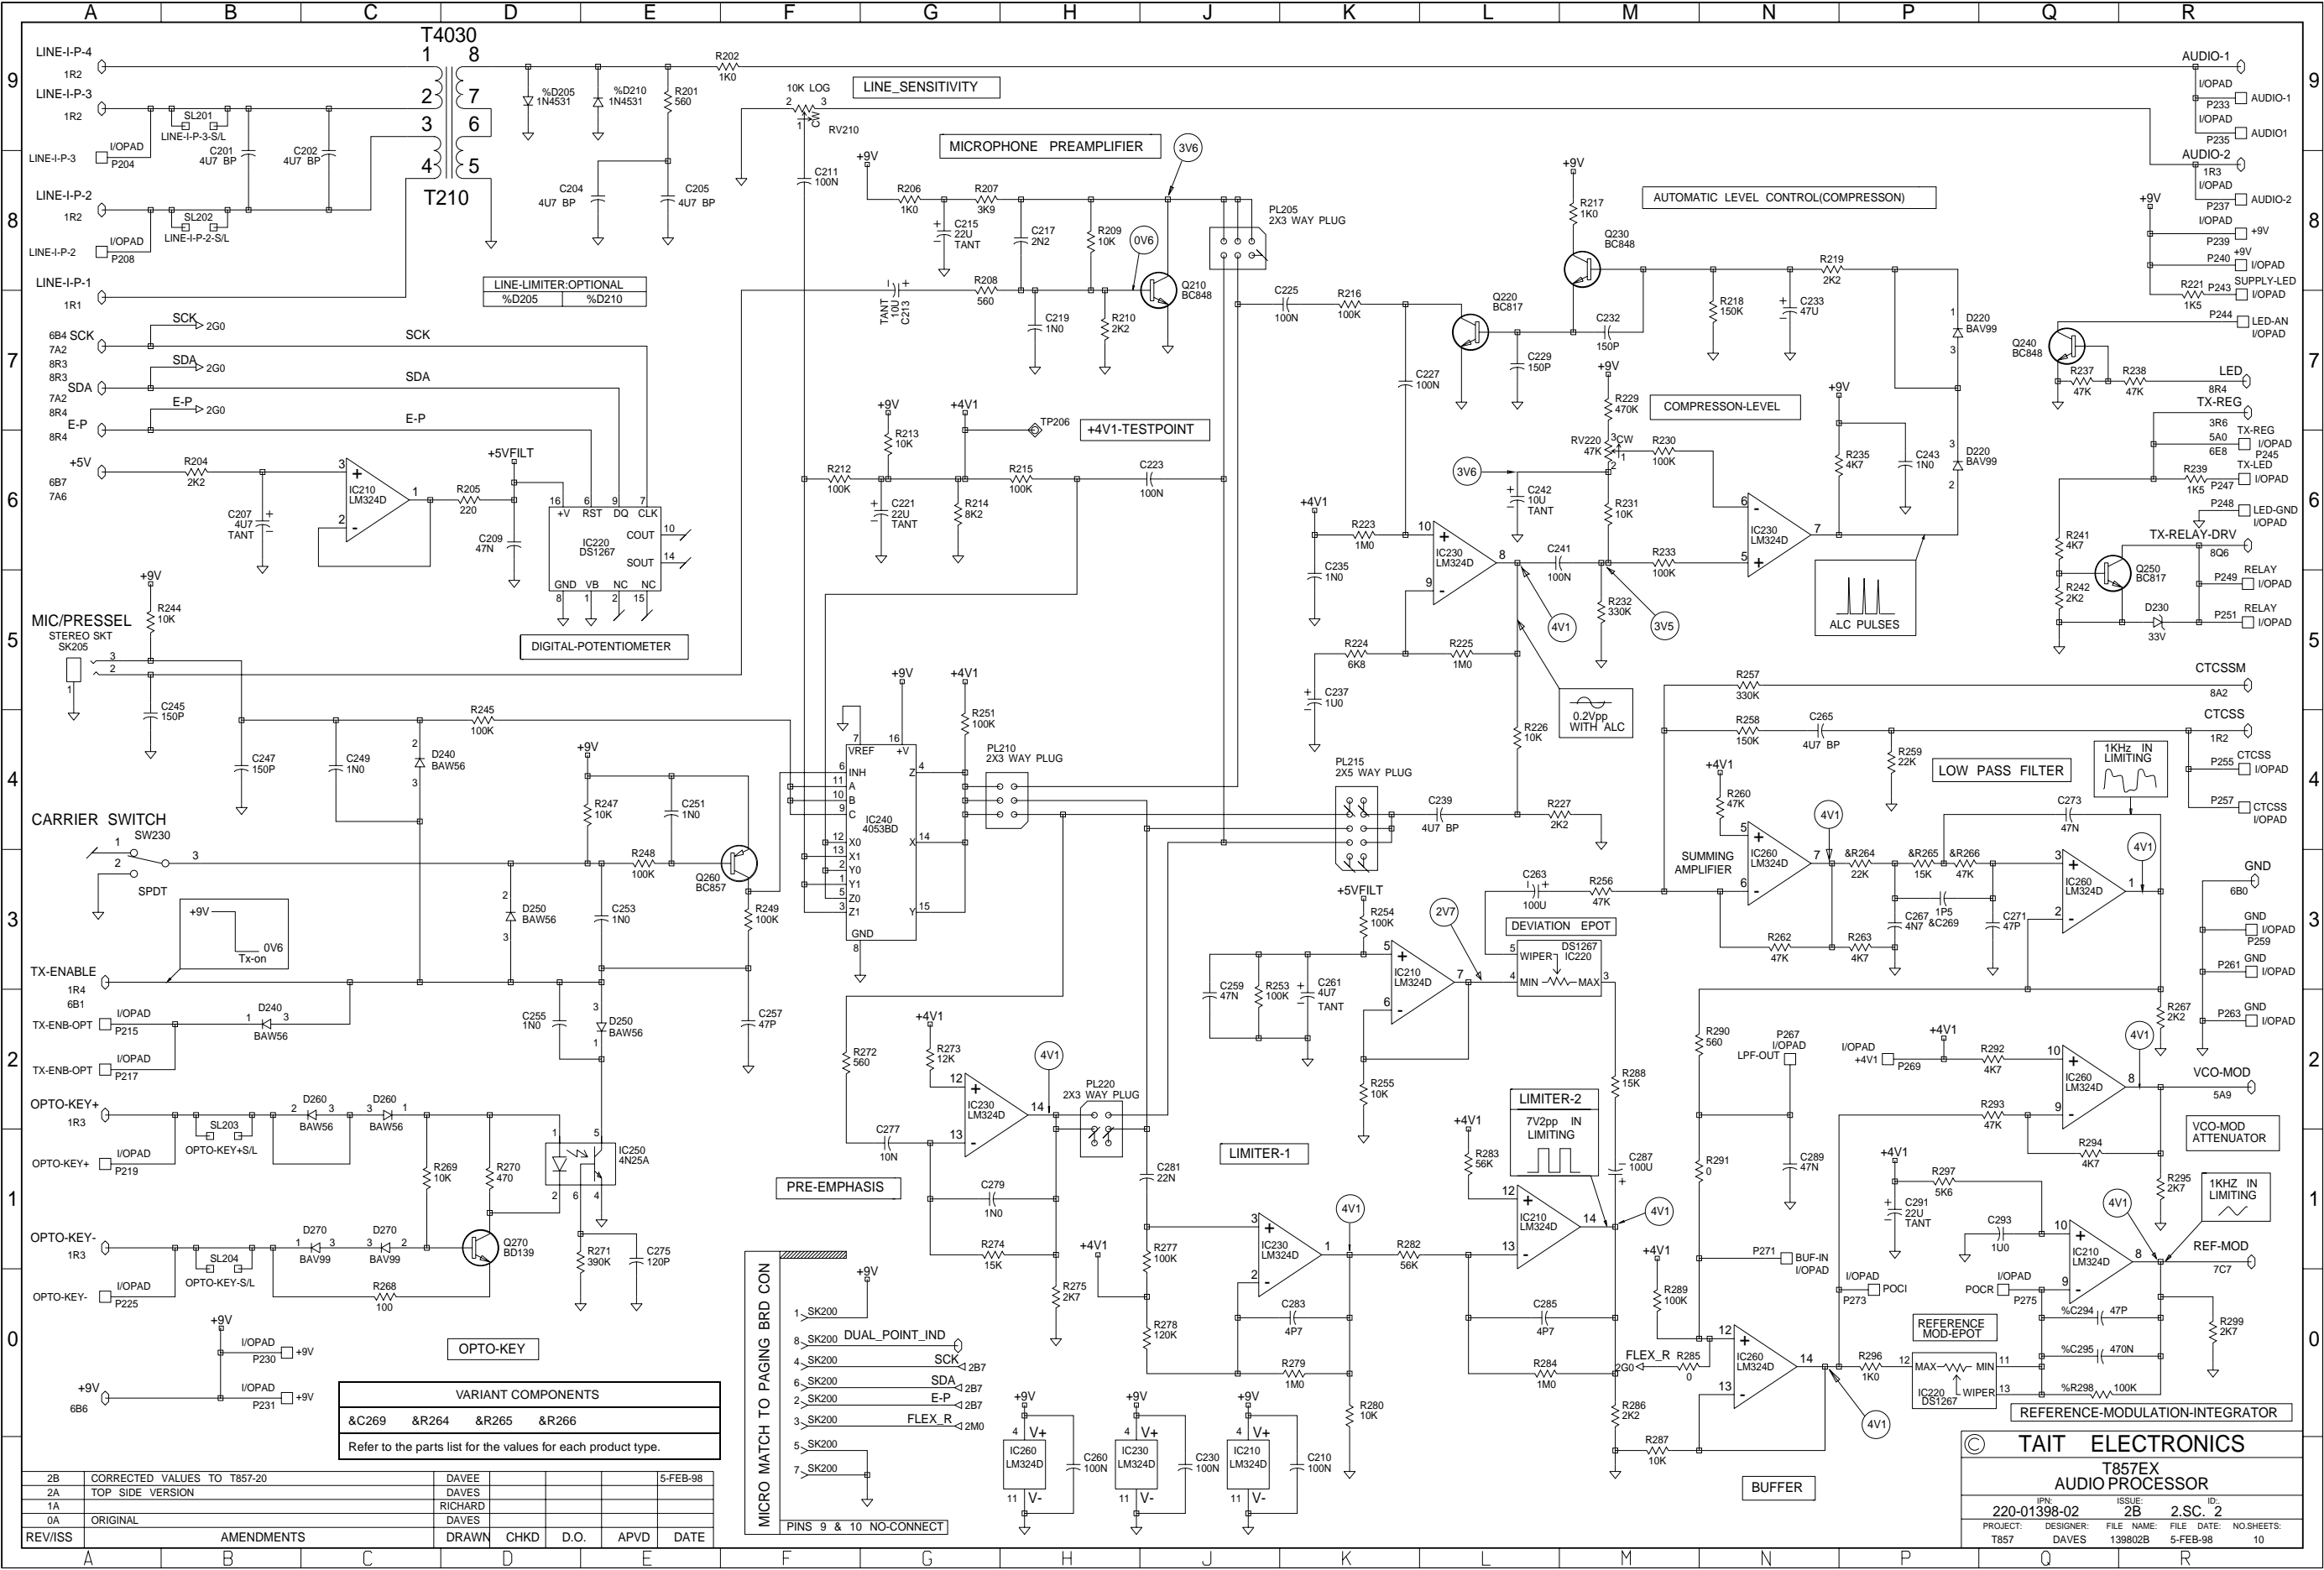


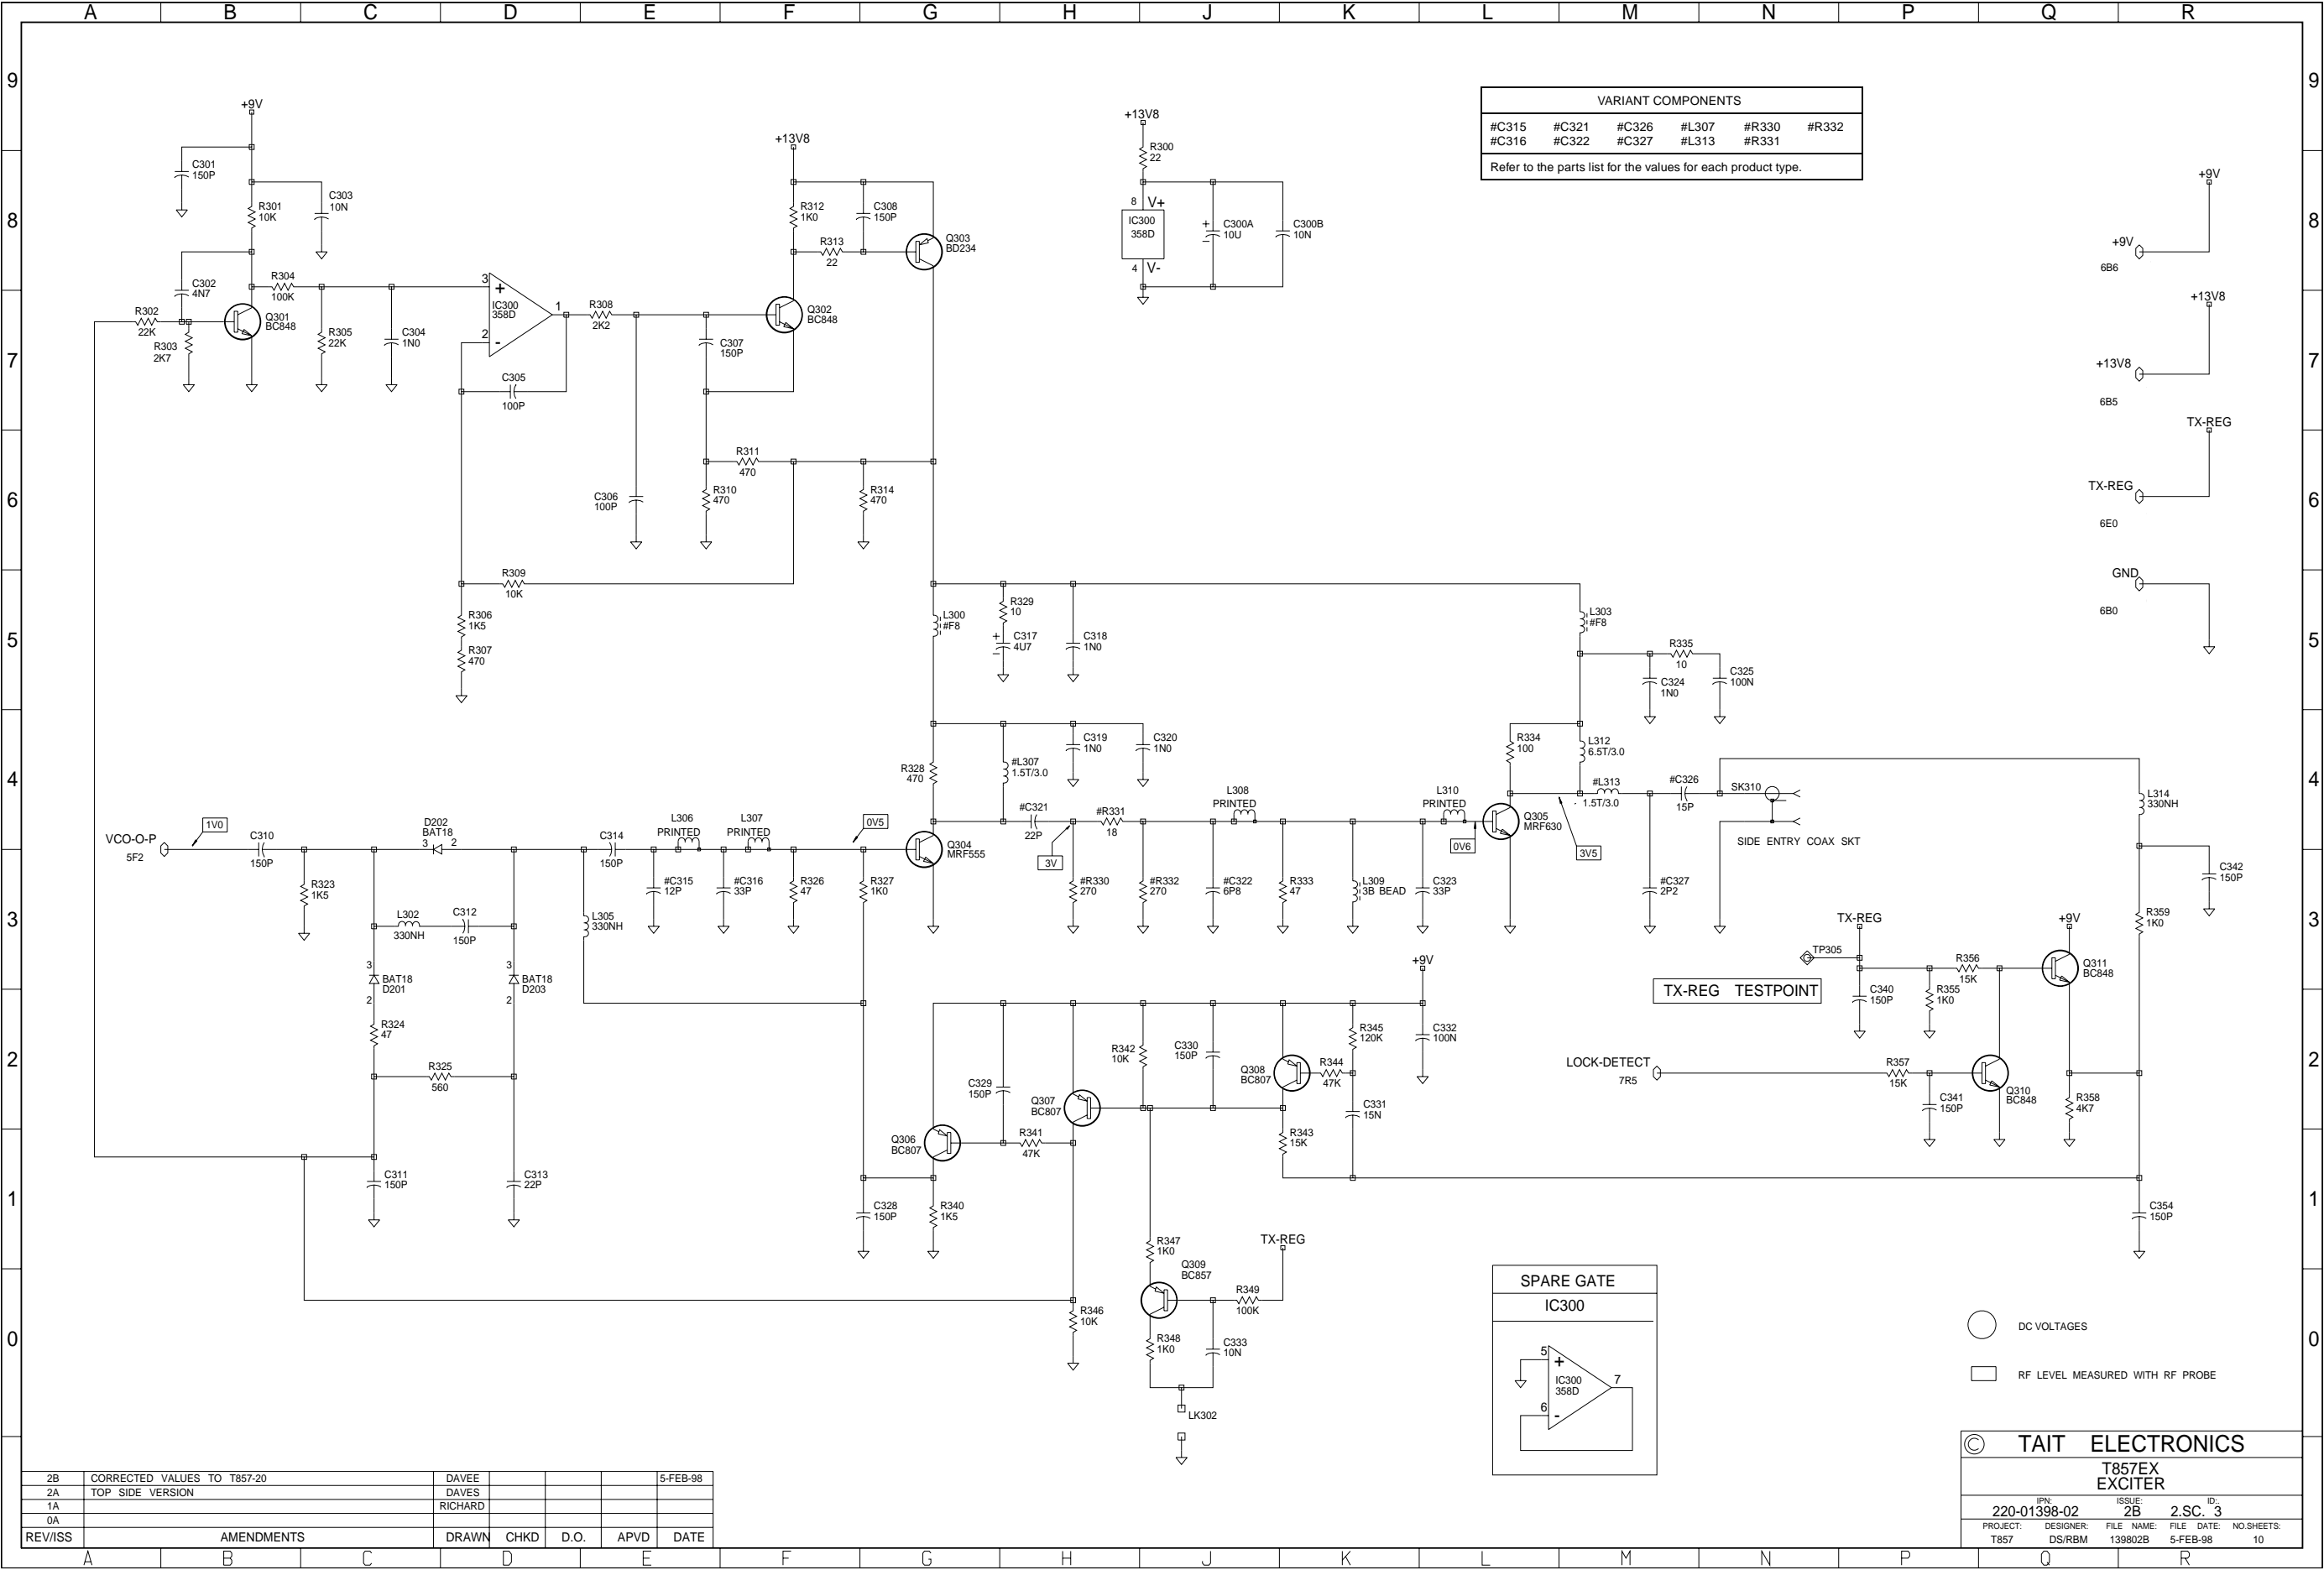



SK420 is the only component in this section
of the T857 circuitry and is shown on sheet 1.

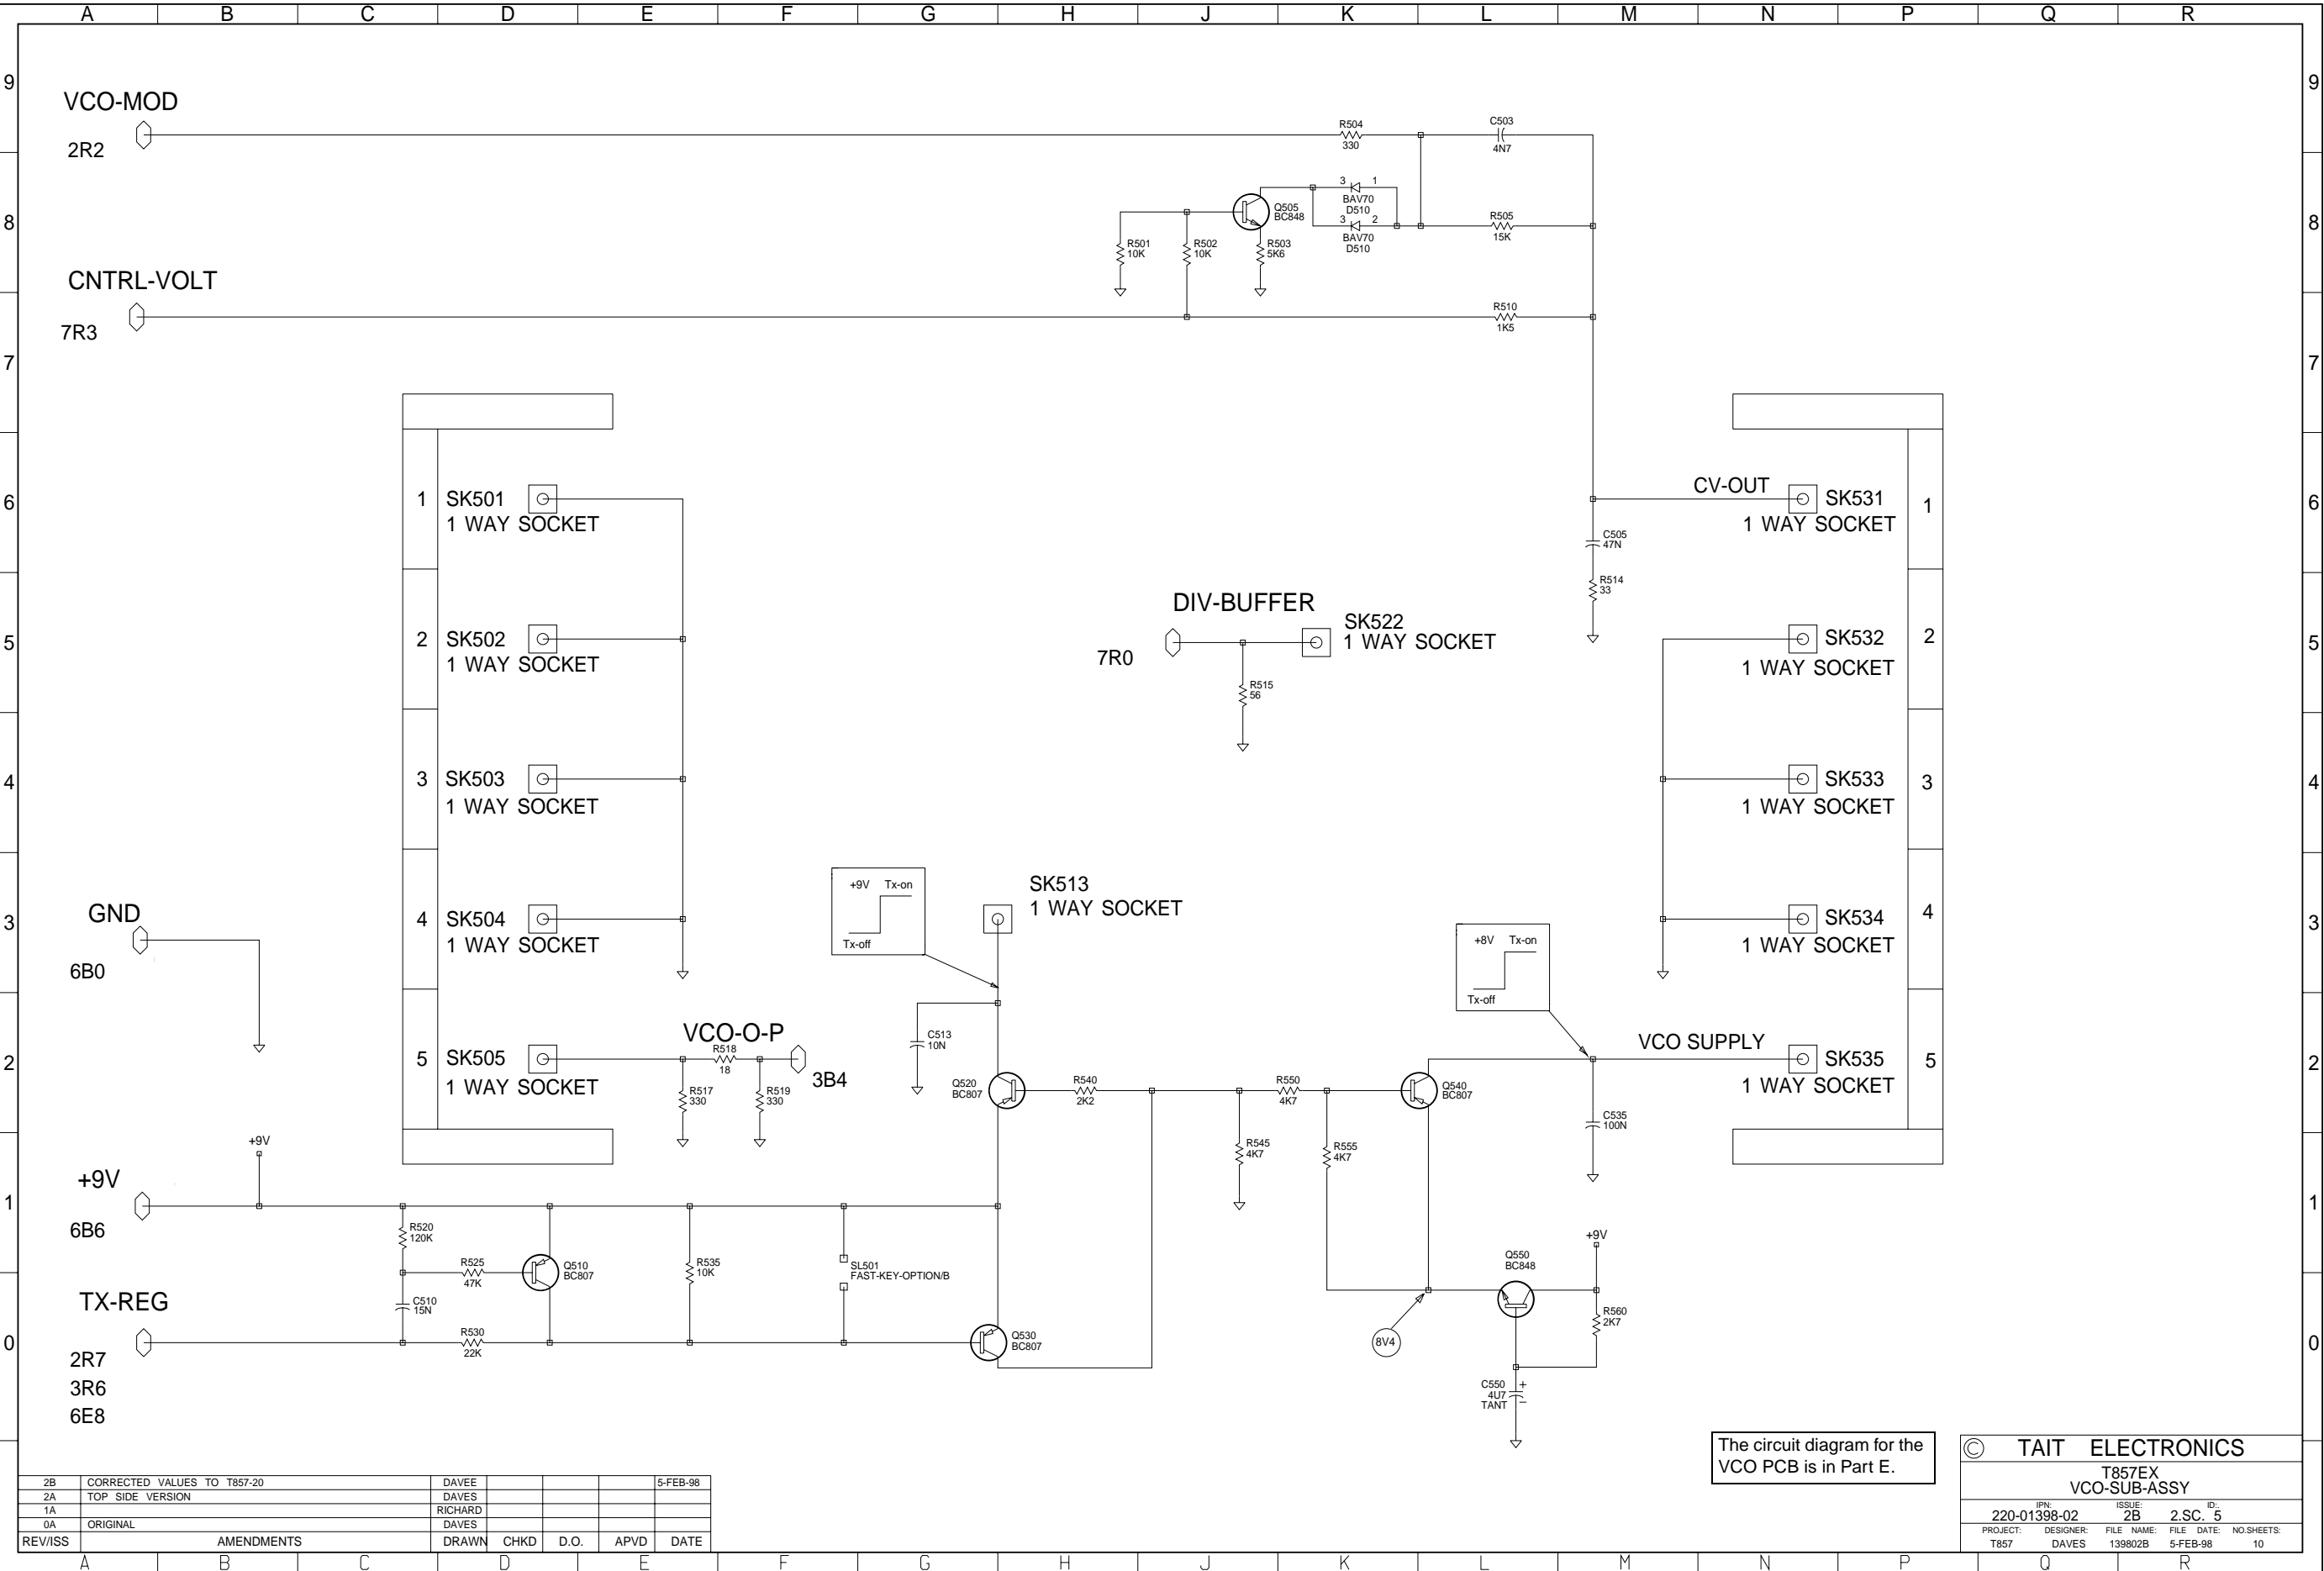

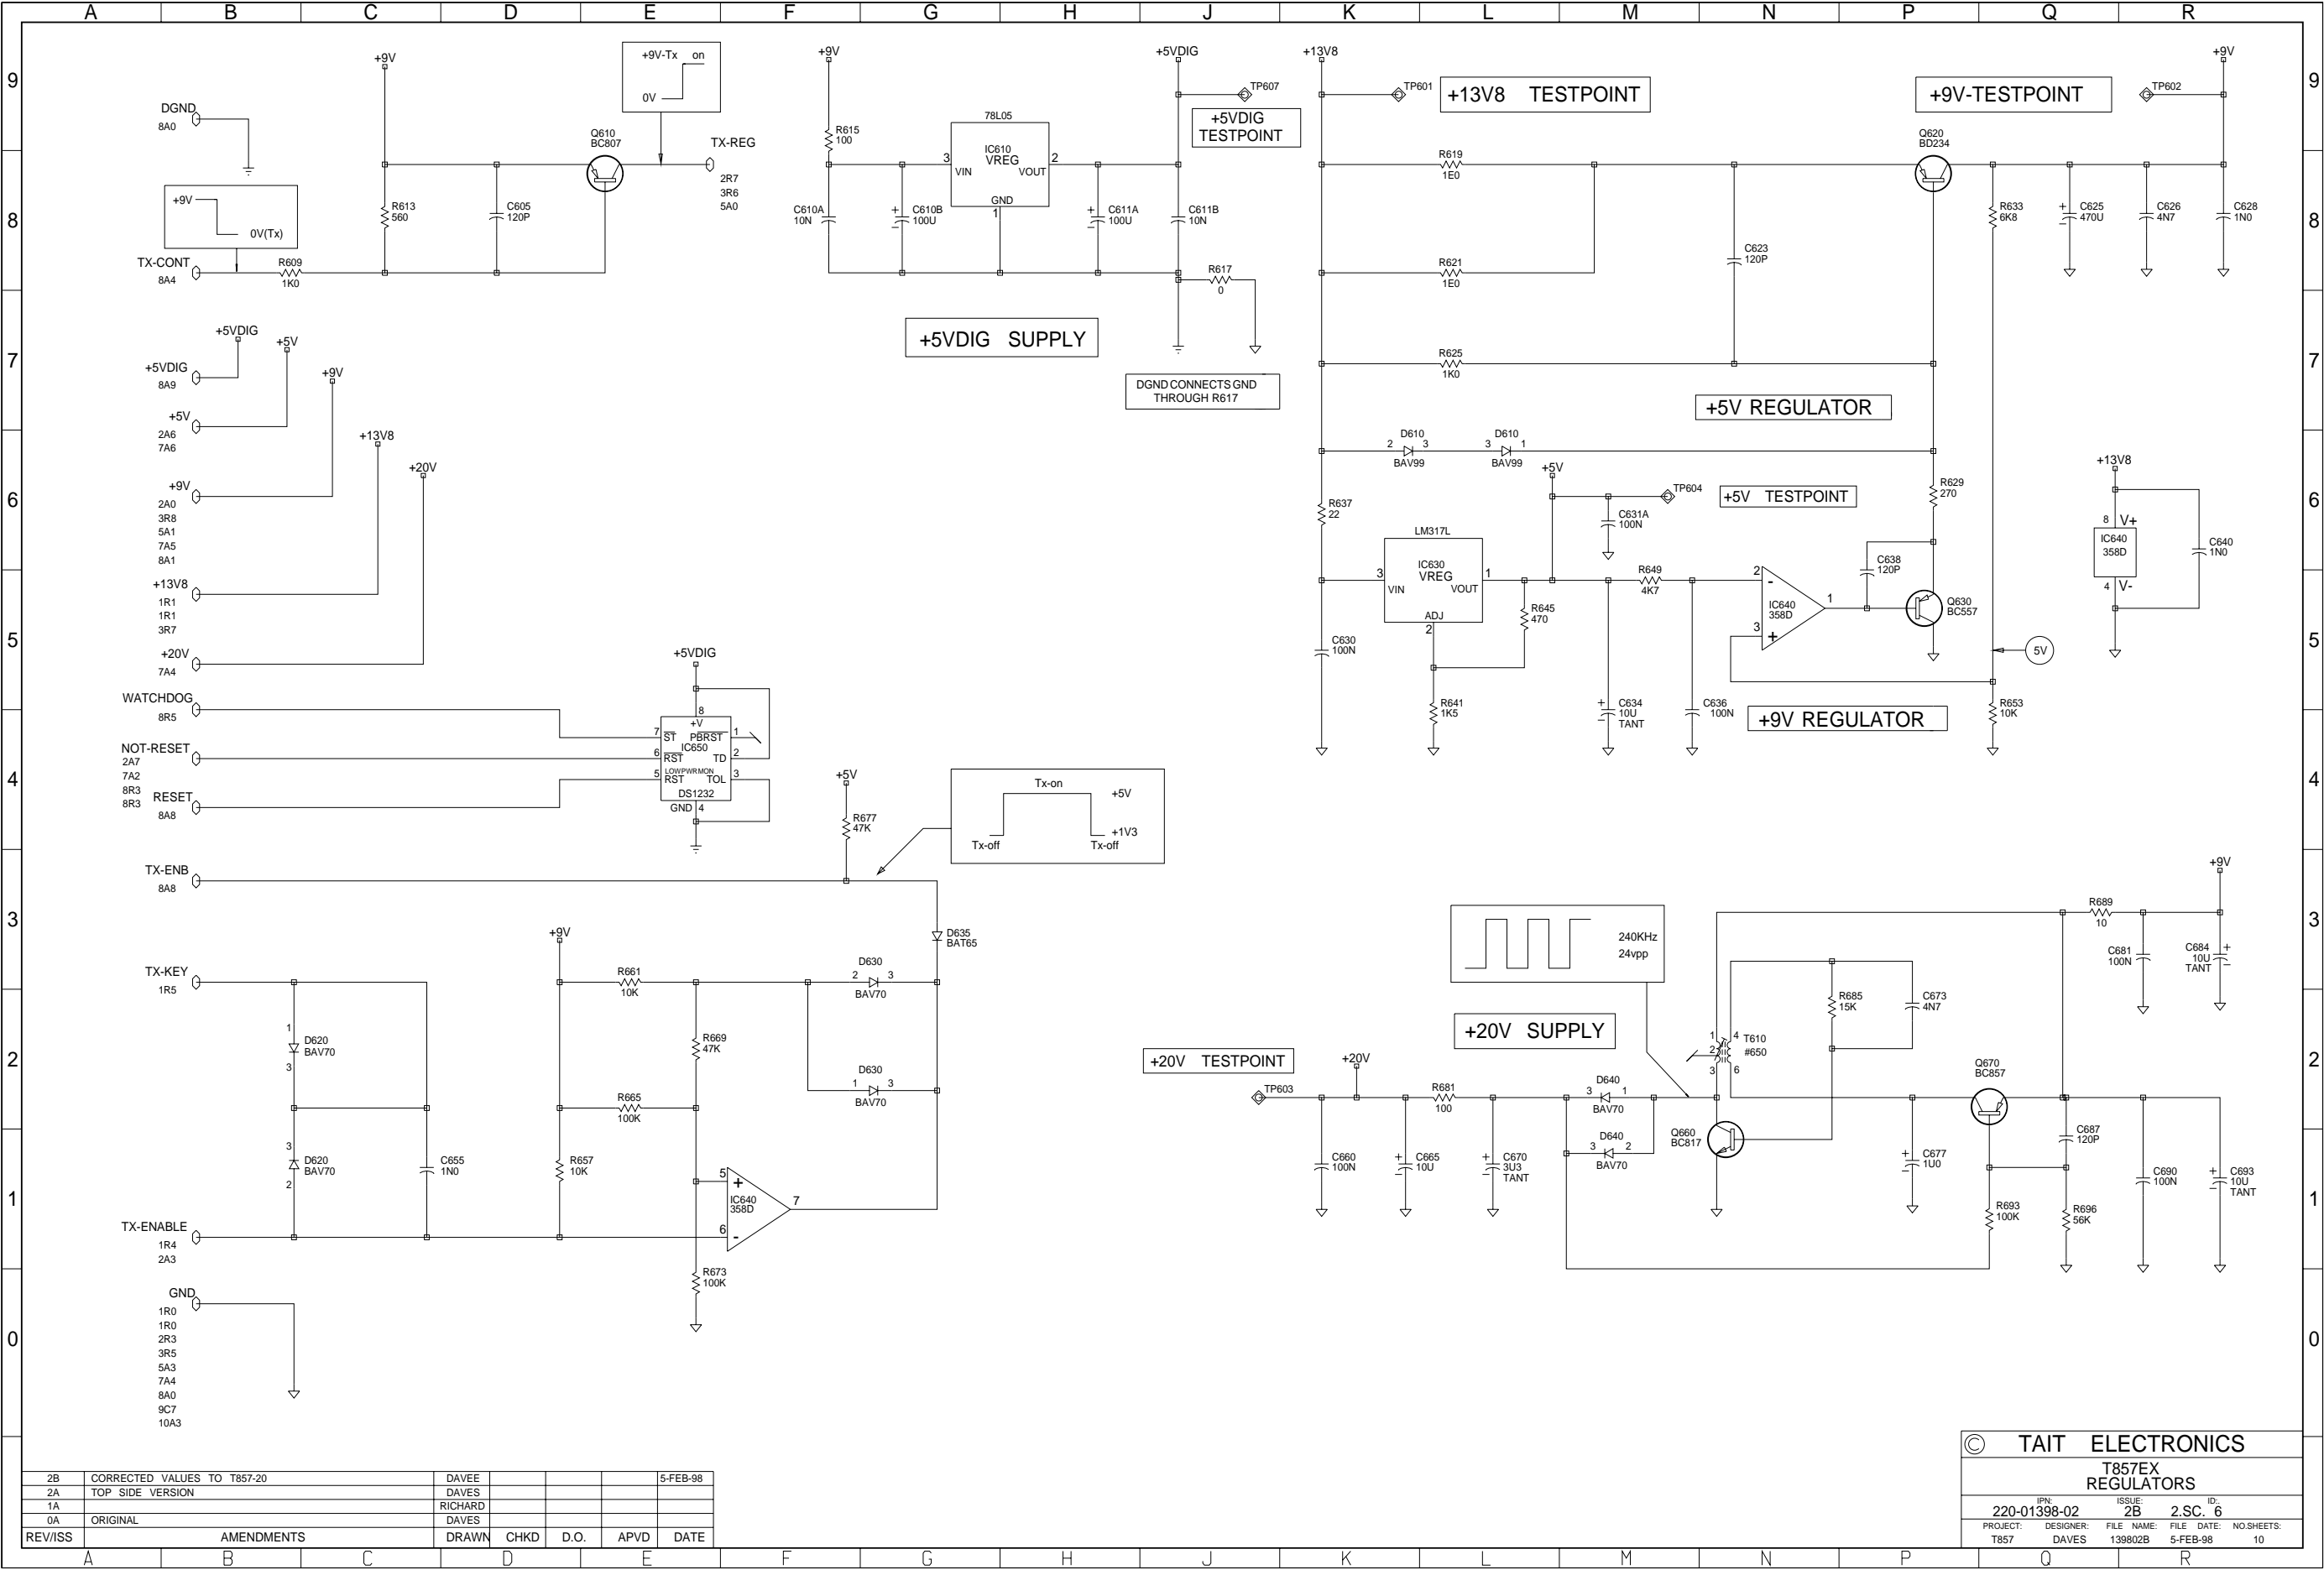

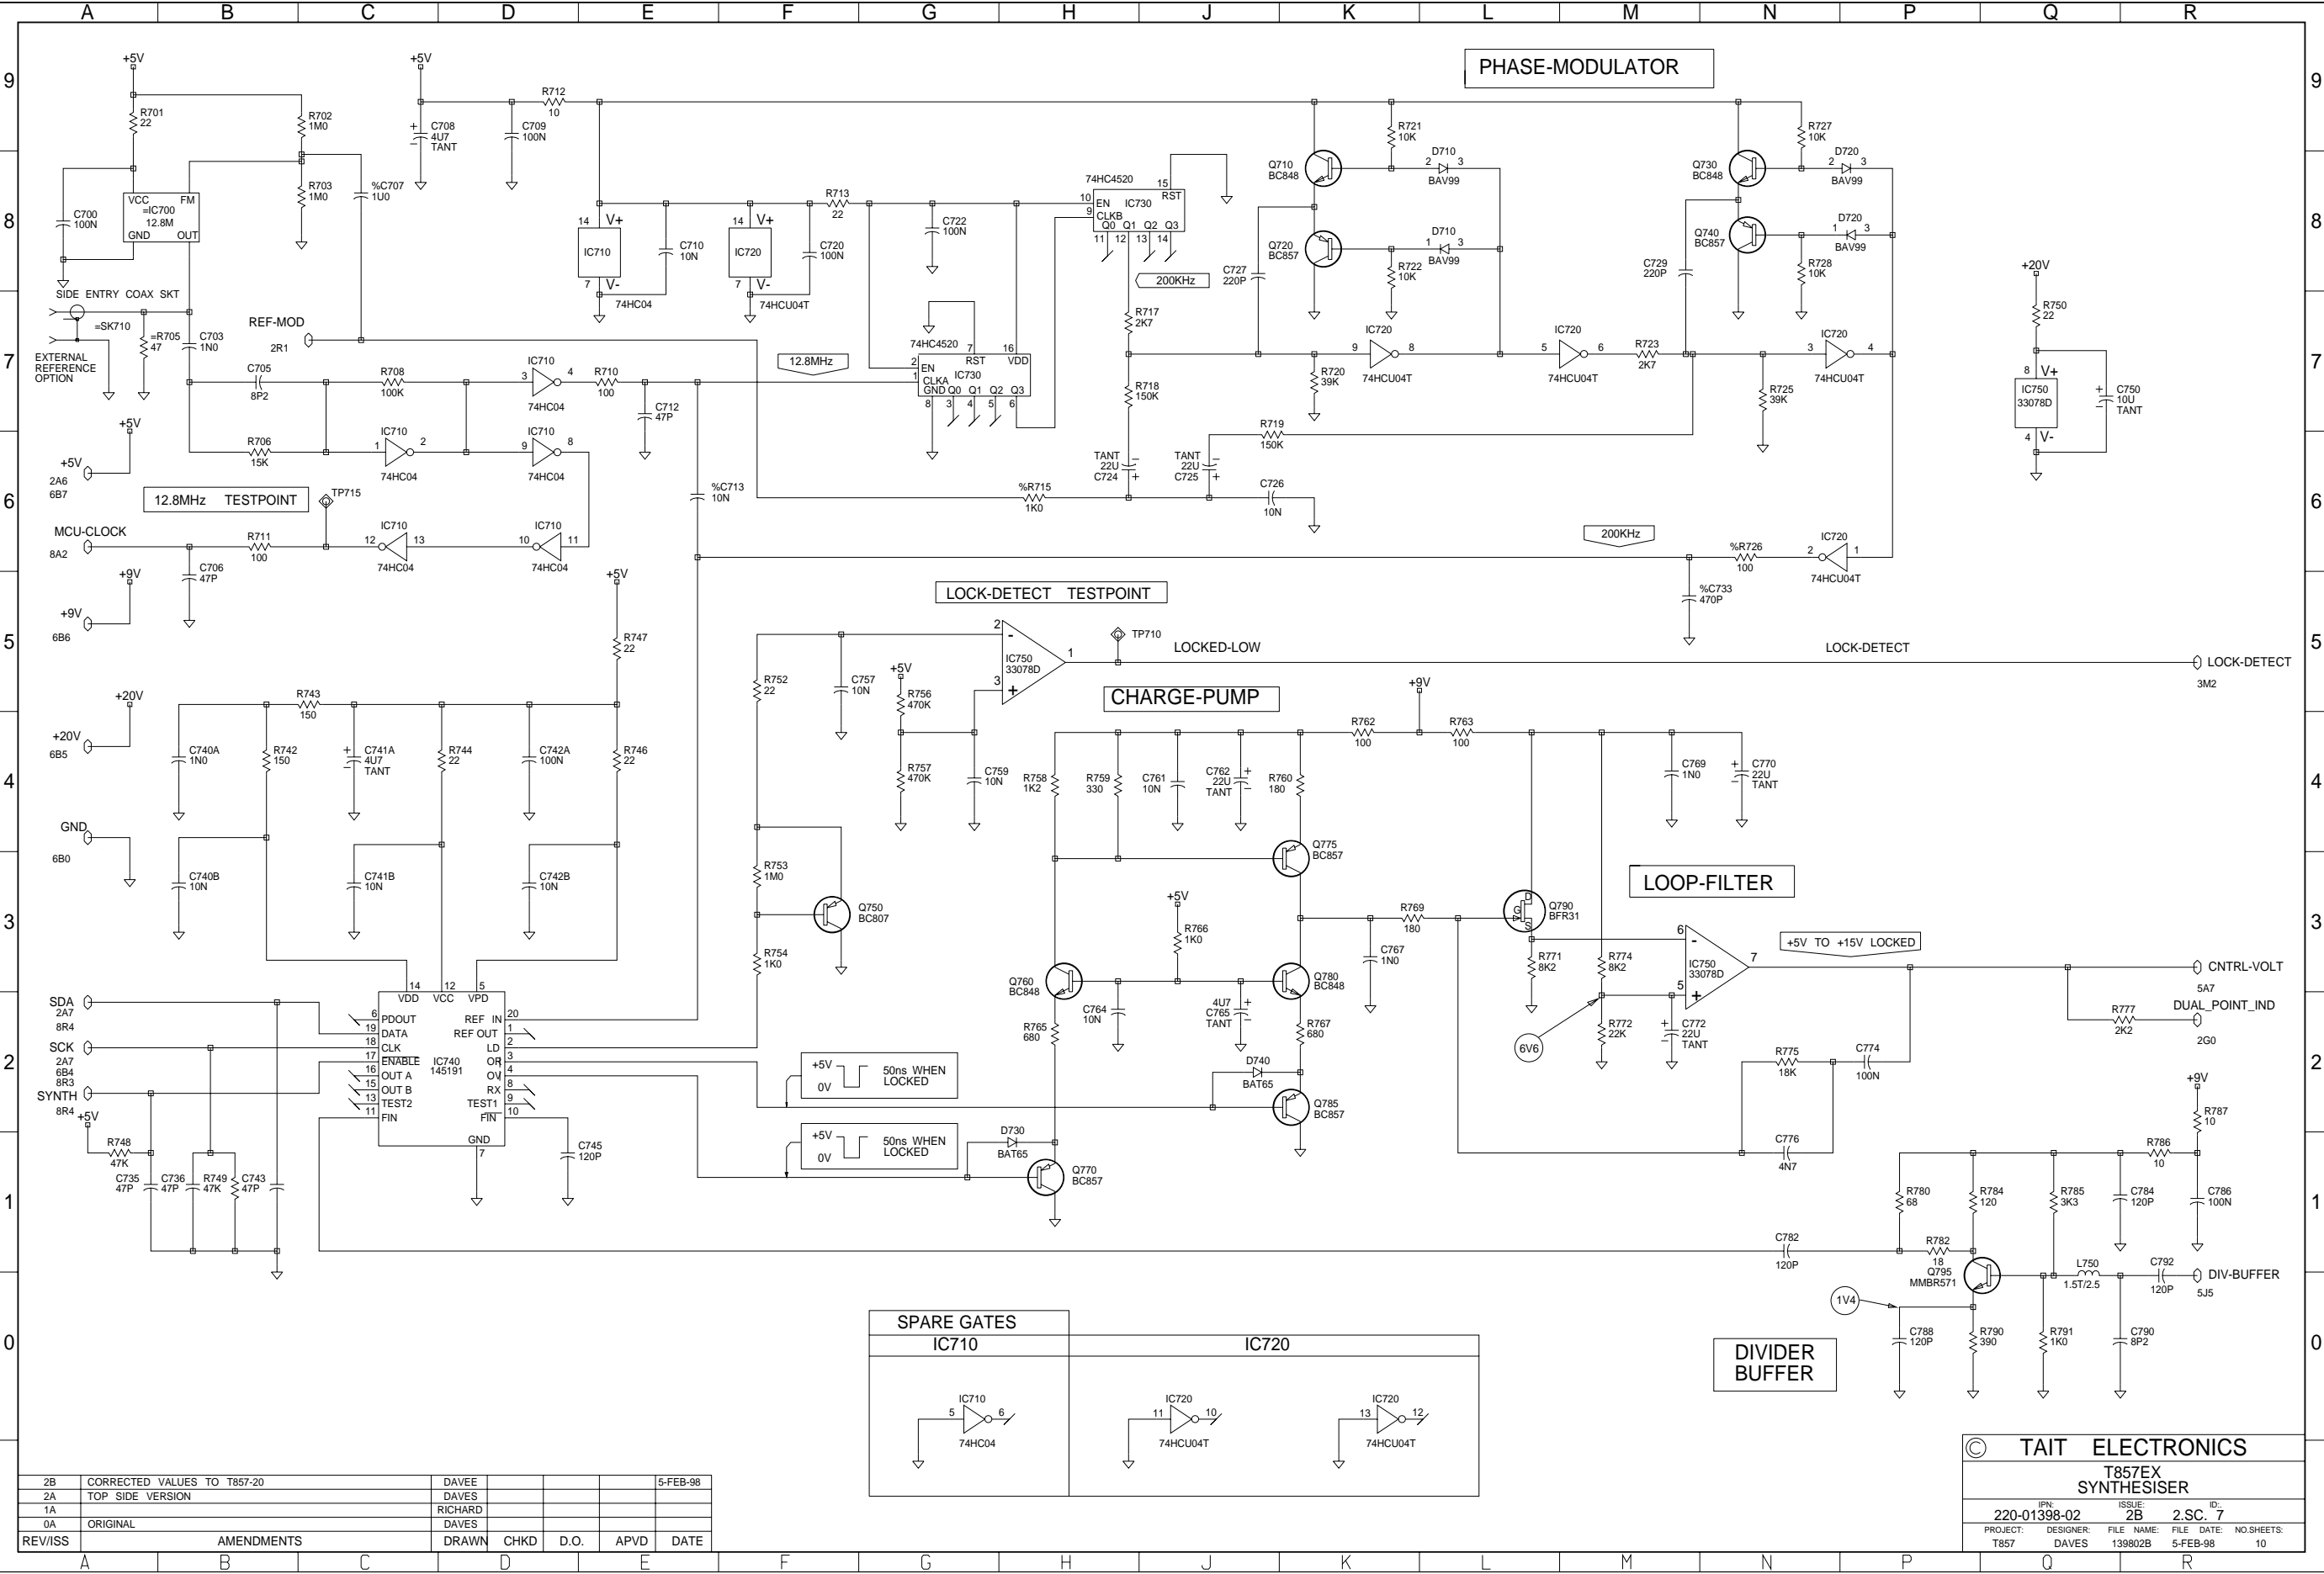

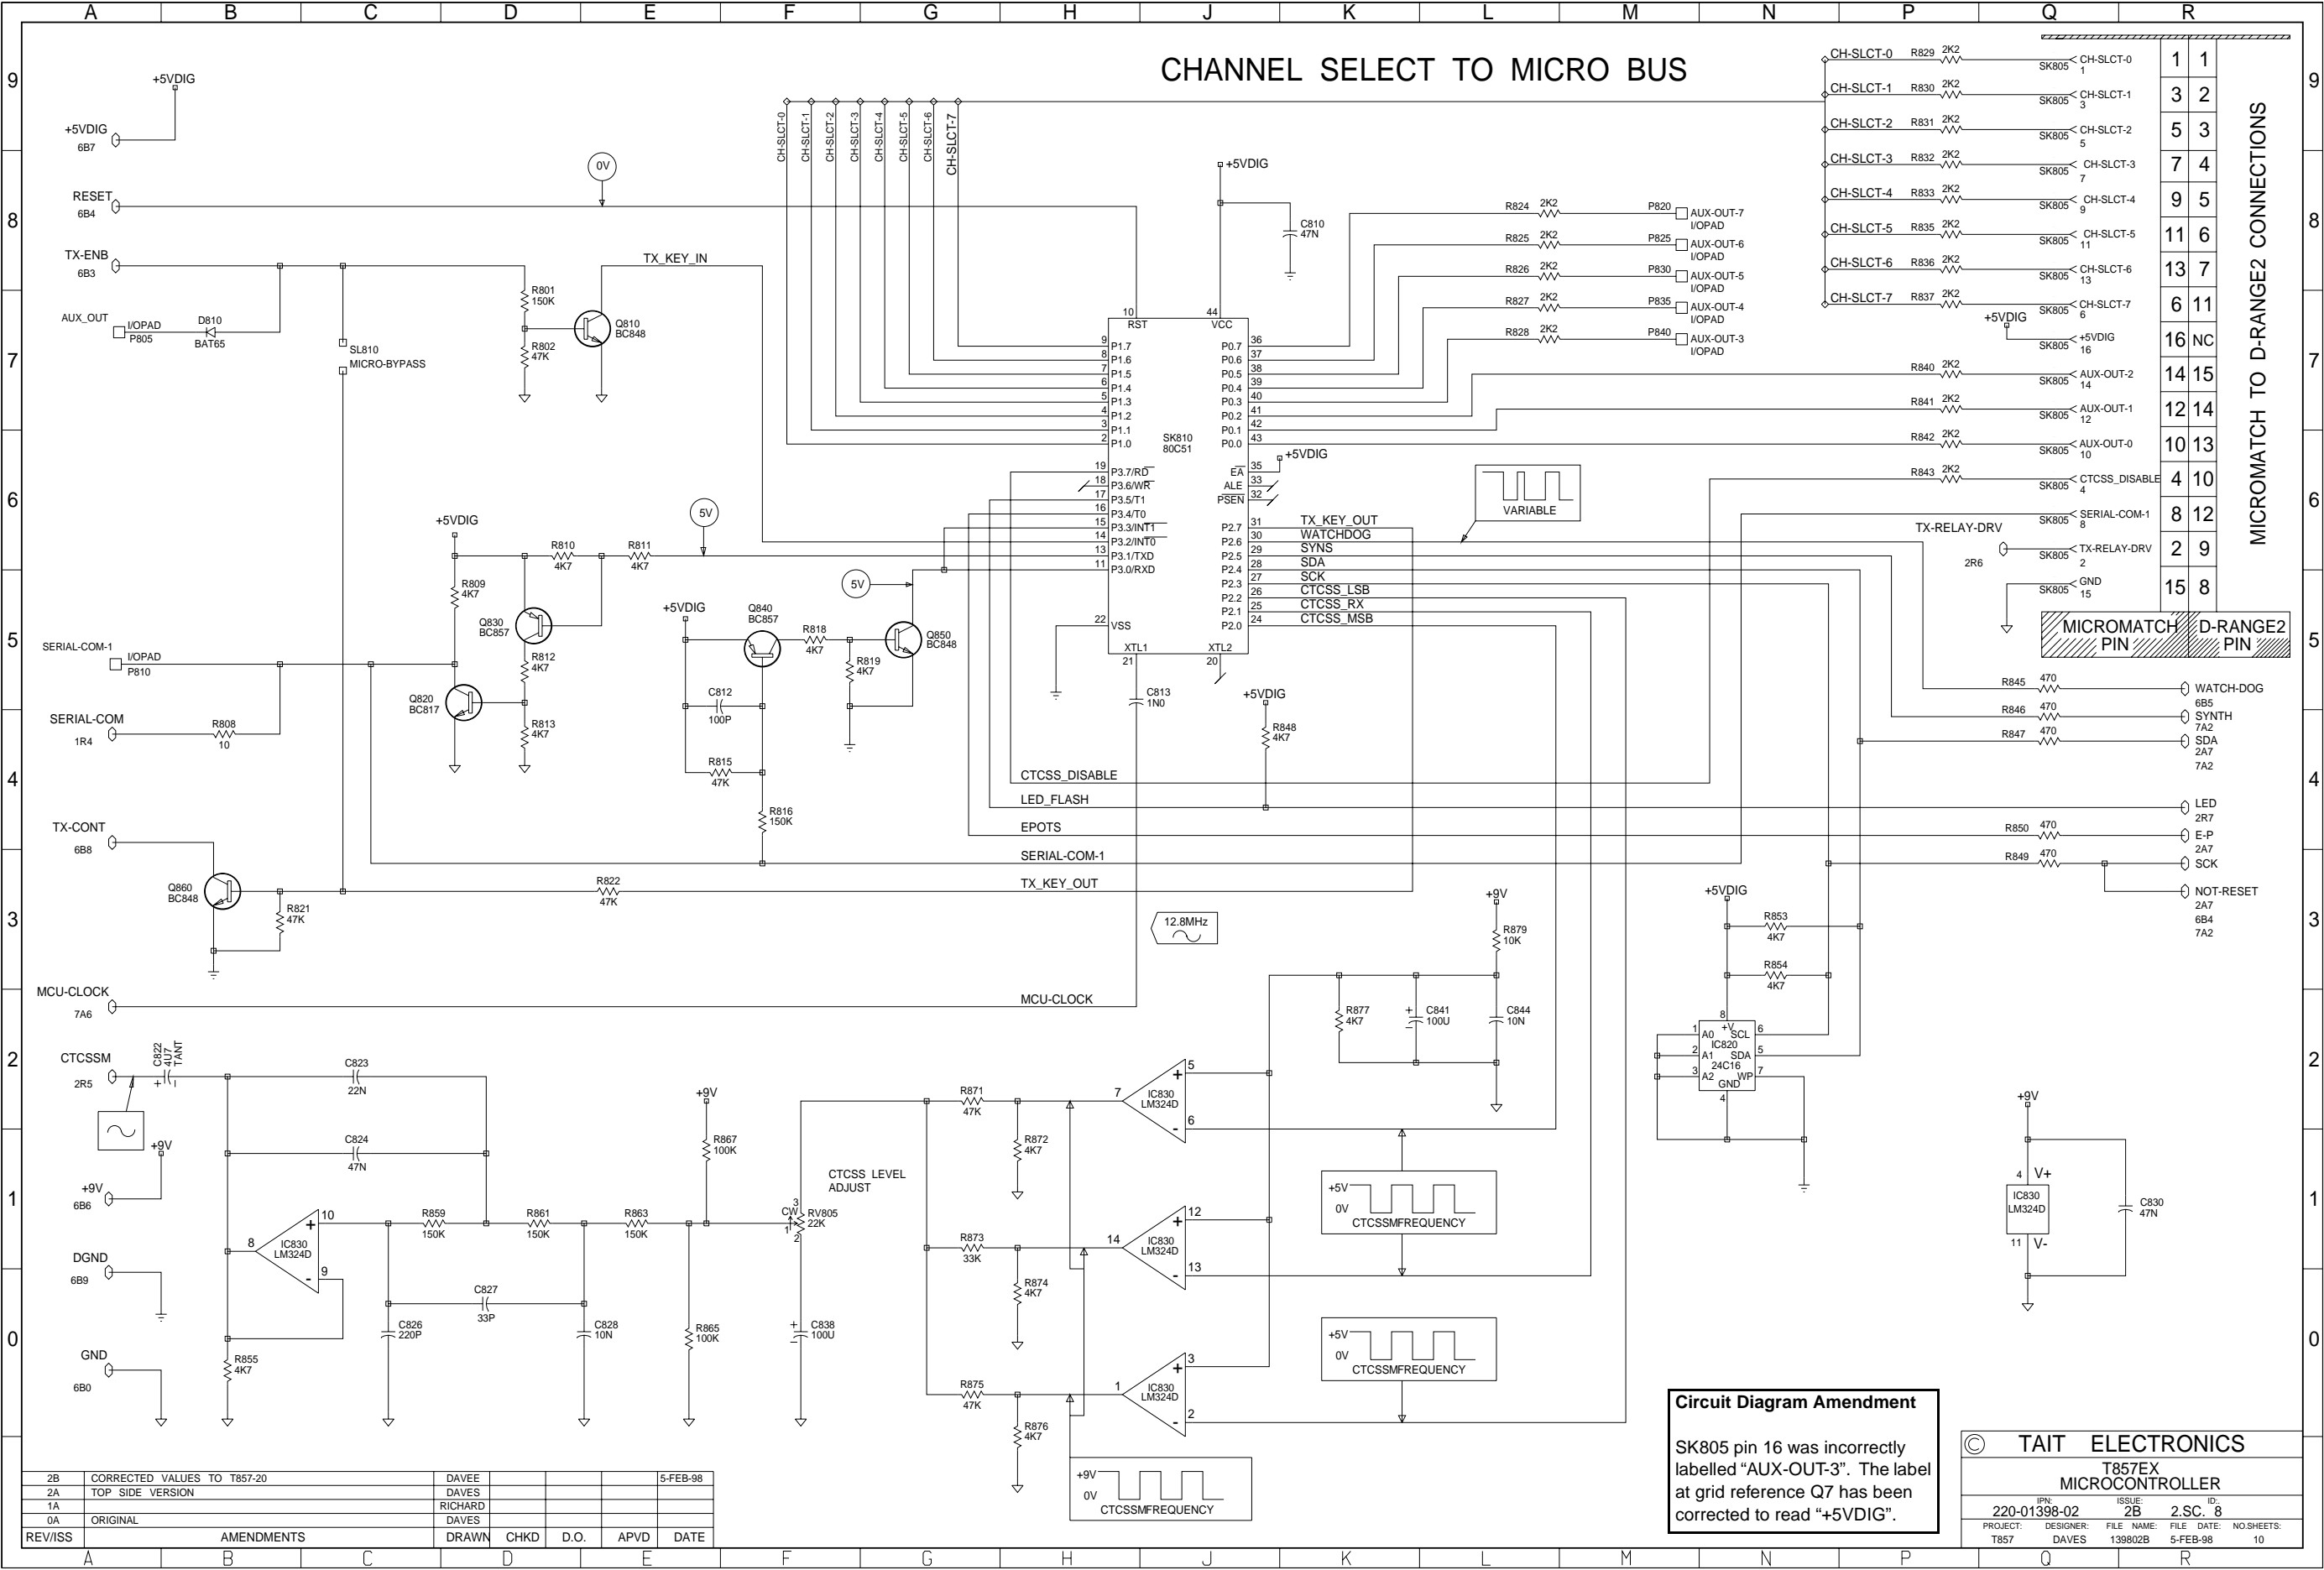

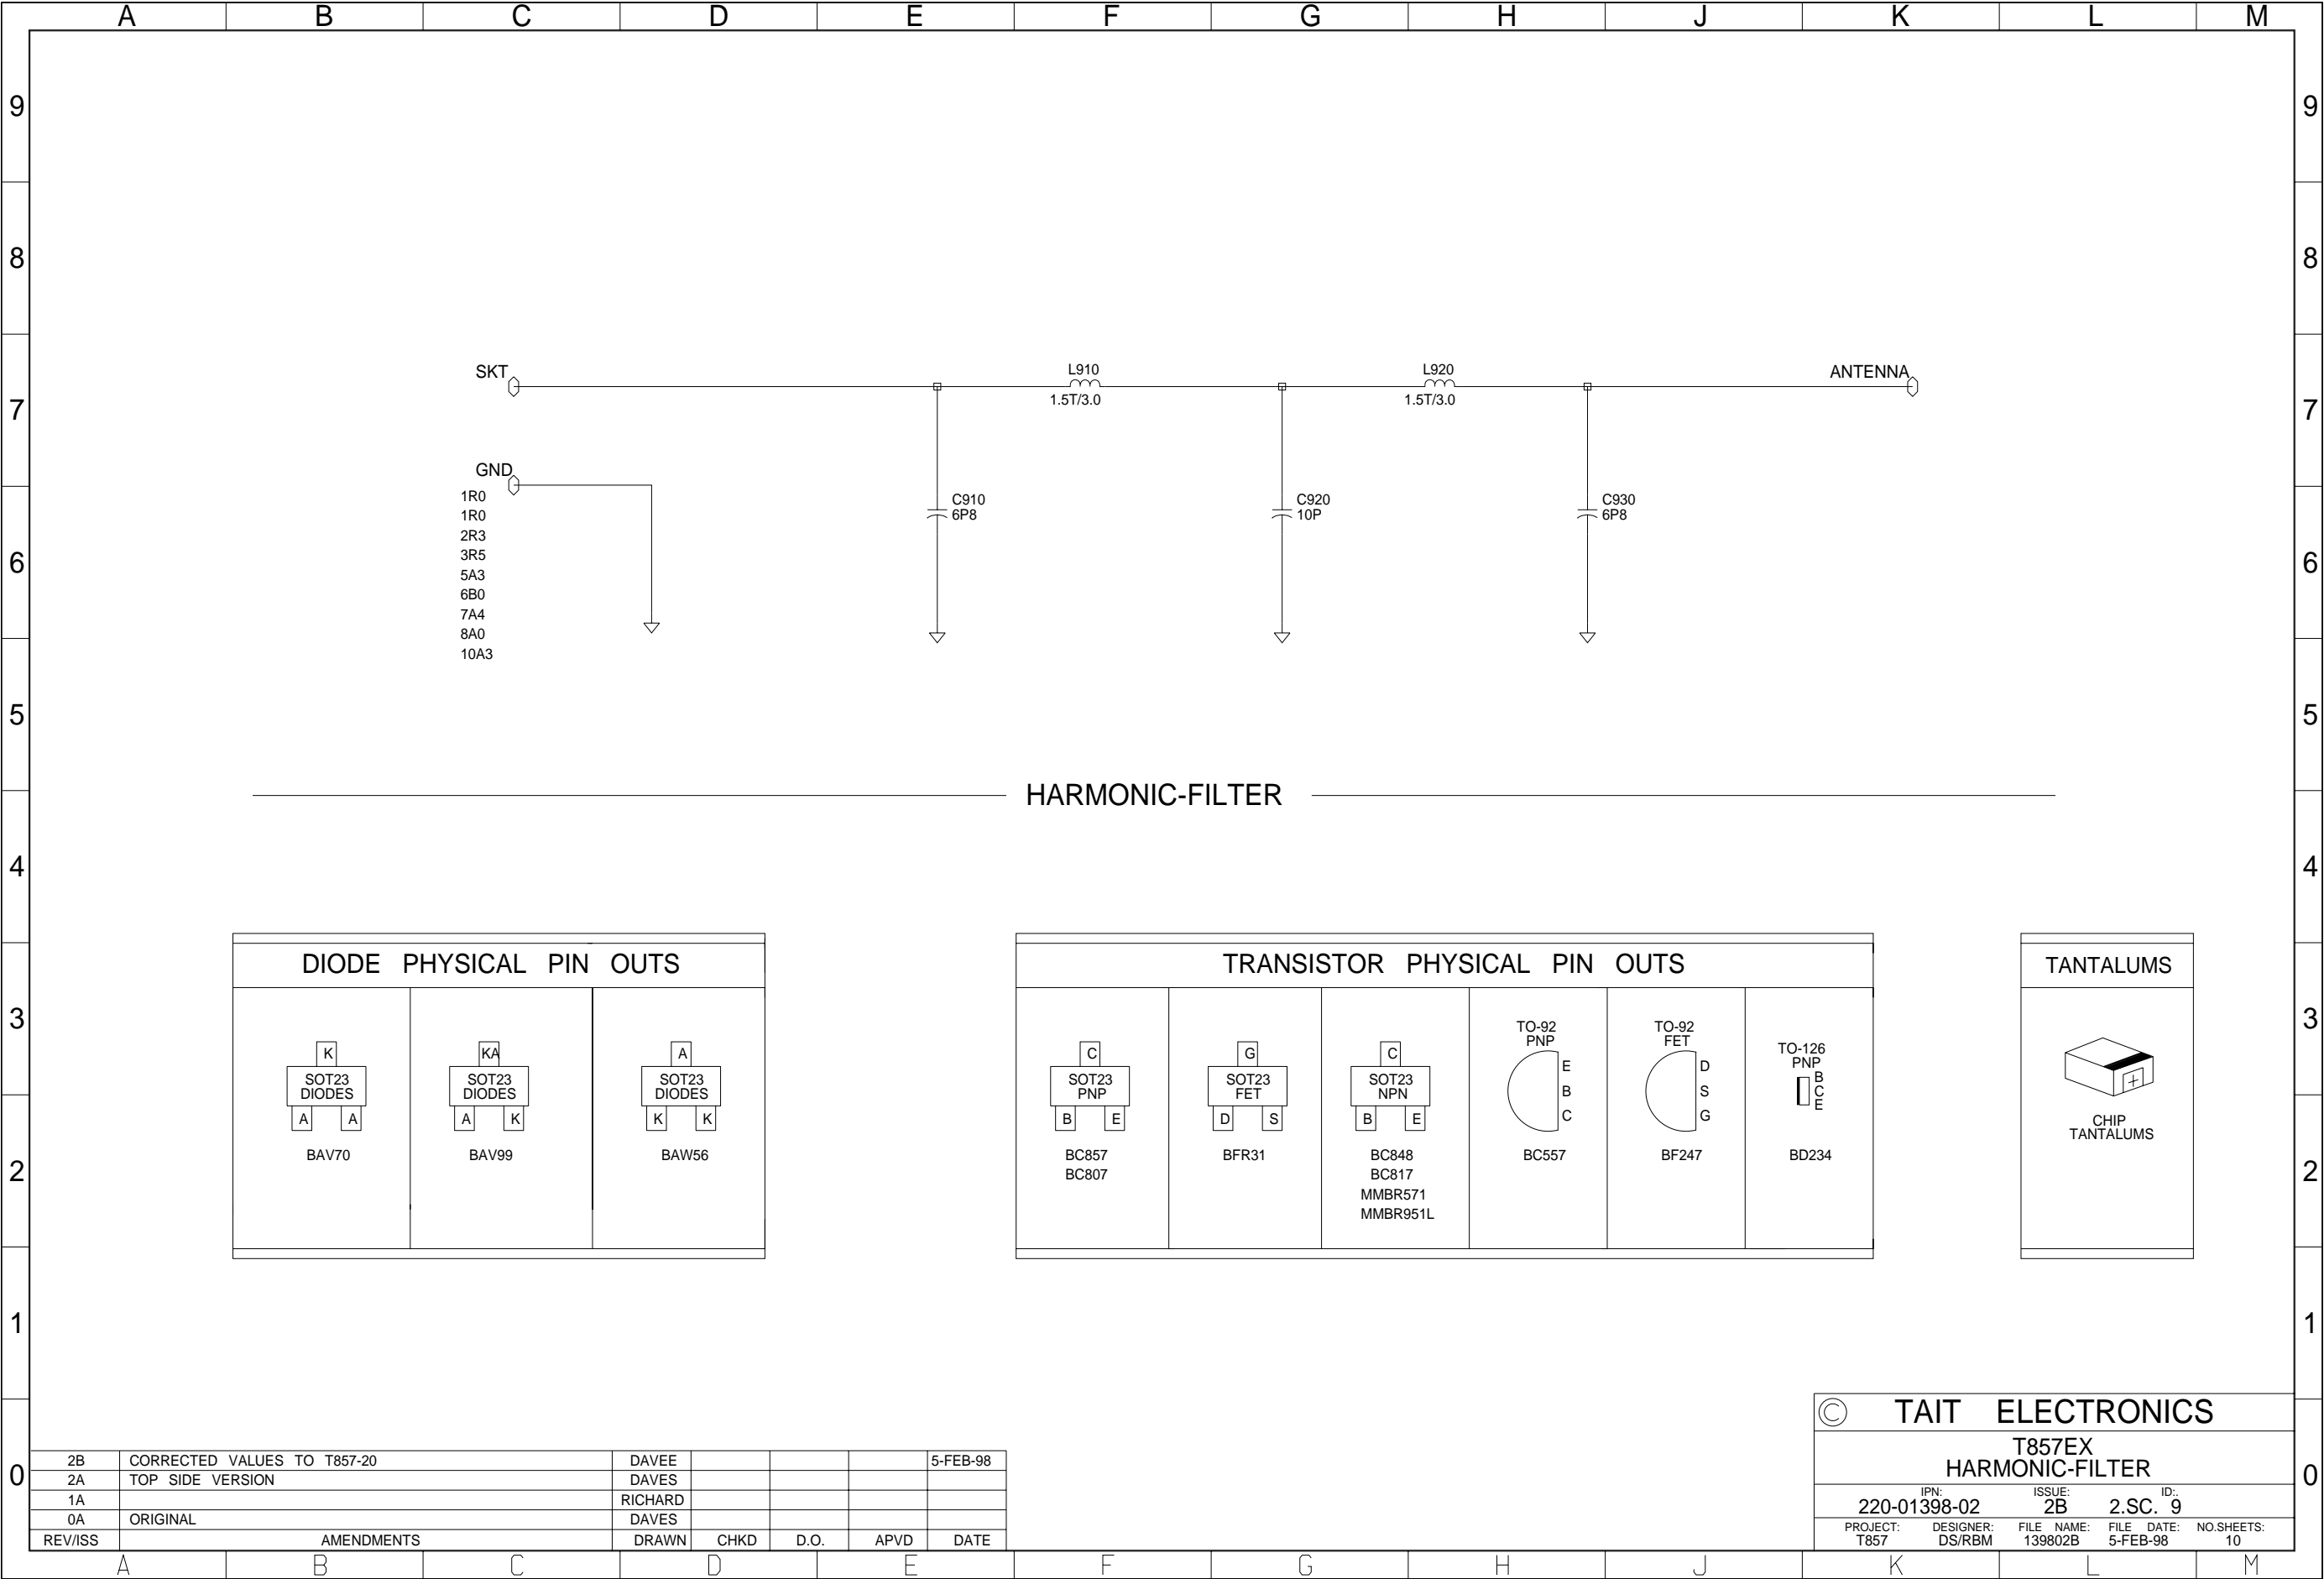

T857 Parts List (IPN 220-01398-04)

How To Use This Parts List

The components listed in this parts list are divided into two main types: those with a circuit reference (e.g. C2, D1, R121, etc.) and those without (miscellaneous and mechanical).

Those with a circuit reference are grouped in alphabetical order and then in numerical order within each group. Each component entry comprises three or four columns: the circuit reference, variant (if applicable), IPN and description. A number in the variant column indicates that this is a variant component which is fitted only to the product type listed. Static sensitive devices are indicated by an (S) at the start of the description column.

The miscellaneous and mechanical section lists the variant and common parts in IPN order. Where possible, a number in the legend column indicates their position in the mechanical assembly drawing.

The Parts List Amendments box below lists component changes that took place after the parts list and diagrams in this section were compiled. These changes (e.g. value changes, added/deleted components, etc.) are listed by circuit reference in alphanumeric order and supersede the information given in the parts list or diagrams. Components without circuit references are listed in IPN order.

Parts List Amendments

Capacitor IPN Change	The IPN of the 8p2 chip capacitors used in the T857 has been changed from 015-21820-01 to 015-21820-02. The components themselves have not changed (780047/48/49/50).		
&C289	T857-16-0500: T857-26-0500: T857-36-0500:	} changed from 68nF (IPN 015-25680-08) to 100nF (IPN 015-26100-08) to meet FCC Type Approval specification (710994).	
#C315	T857-1X-XXXX Only: changed from 12pF (IPN 015-22120-01) to 8p2 (IPN 015-21820-02)		} to improve output power flatness across the band 400-440MHz (711073).
#C316	T857-1X-XXXX Only: changed from 33pF (IPN 015-22330-01) to 27pF (IPN 015-22270-01)		
#C322	T857-1X-XXXX Only: changed from 6p8 (IPN 015-21680-01) to 8p2 (IPN 015-21820-02)		
#C326	T857-1X-XXXX Only: changed from 22pF (IPN 015-22220-01) to 4p7 (IPN 015-21470-01)		
#C327	T857-1X-XXXX Only: changed from 2p2 (IPN 015-21220-01) to 3p3 (IPN 015-21330-01)		
C600	Deleted	} to improve cyclic keying (710980).	
C601	Changed from 1nF (IPN 015-24100-08) to 22pF (IPN 015-22220-01)		
C757	Changed from 22nF (IPN 015-25220-08) to 47nF (IPN 015-25470-08)		
C727, C729	Changed from 220pF (IPN 015-23220-01) to 100pF (IPN 015-23100-01): phase modulation revised to reduce low frequency jitter to improve signal-to-noise specification (wide bandwidth method) (711145).		
=IC700	-16, -26, -36: TCXO changed to IPN 539-00010-55 to meet FCC Type Approval requirements (710923/36).		
Q550	Changed from BCW60 (IPN 000-10008-48) to BC817-25 (IPN 000-10008-17) as BCW60 is underrated (711093).		
R256	Changed from 47k (IPN 036-15470-10) to 56k (IPN 036-15560-00): audio levels revised to centralise EPOT settings (711145).		
R257	Changed from 330k (IPN 036-16330-00) to 560k (IPN 036-16560-00) to allow CTCSS to be set more easily (711145).		
&R264	T857-16-0500: T857-26-0500: T857-36-0500:	} changed from 22k (IPN 036-15220-00) to 18k (IPN 036-15180-00) to meet FCC Type Approval Specification (710994).	
R288	Changed from 12k (IPN 036-15120-00) to 18k (IPN 036-15180-00): audio levels revised to centralise EPOT settings (711145).		

Parts List Amendments - Continued

#R307	T857-1X-XXXX Only: changed from 470Ω (IPN 036-13470-00) to 680Ω (IPN 036-13680-00)	} to improve output power flatness across the band 400-440MHz (711073).
#R331	T857-1X-XXXX Only: changed from 12Ω (IPN 030-52120-20) to 22Ω (IPN 030-52220-20)	
#R330/#R332	T857-1X-XXXX Only: changed from 470Ω (IPN 030-53470-20) to 220Ω (IPN 030-53220-20)	
R718, R719	Changed from 150k (IPN 036-16150-00) to 27k (IPN 036-15270-00): phase modulation revised to reduce low frequency jitter to improve signal-to-noise specification (wide bandwidth method) (711145).	
349-00020-36	The two M3x8 Torx screws which secure the module into the rack frame have been replaced by M3x8 Pozidriv screws (IPN 349-00020-55) (750101/2/3/5/6).	

Ref	Var	IPN	Description	Ref	Var	IPN	Description
Note: %D205 and %D210 are optional level limiting diodes for special applications. =R705 (47 ohm) and =SK710 are fitted in place of =IC700 when an external frequency reference is used. These two components are supplied with the auxiliary D-range kits (T800-06-0000 & T800-06-0001).				C300B		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C201		016-07470-06	CAP SMD ELECT BI-P 4U7 50V 20%	C301		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C202		016-07470-06	CAP SMD ELECT BI-P 4U7 50V 20%	C302		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
C204		016-07470-06	CAP SMD ELECT BI-P 4U7 50V 20%	C303		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C205		016-07470-06	CAP SMD ELECT BI-P 4U7 50V 20%	C304		015-24100-08	CAP CER 0805 1N 10% X7R 50V
C207		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	C305		015-23100-01	CAP CER 0805 100P 5% NPO 50V
C209		015-25470-08	CAP CER 0805 47N 10% X7R 50V	C306		015-23100-01	CAP CER 0805 100P 5% NPO 50V
C210		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C307		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C211		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C308		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C213		014-08100-00	CAP TANT CHIP 10M 16VW +20%	C309		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C215		014-08220-01	(L)CAP TANT 22UF10V276MSER	C310		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C217		015-24220-08	CAP CER 0805 2N2 10% X7R 50V	C311		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C219		015-24100-08	CAP CER 0805 1N 10% X7R 50V	C312		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C221		014-08220-01	(L)CAP TANT 22UF10V276MSER	C313		015-22220-01	CAP CER 0805 22P 5% NPO 50V
C223		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C314		015-23150-01	CAP CER 0805 150P 5% NPO 50V
C225		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C315	10	015-22120-01	CAP CER 0805 12P 5% NPO 50V
C227		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C315	13	015-22120-01	CAP CER 0805 12P 5% NPO 50V
C229		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C315	15	015-22120-01	CAP CER 0805 12P 5% NPO 50V
C230		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C315	16	015-22120-01	CAP CER 0805 12P 5% NPO 50V
C232		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C315	20	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C233		016-08470-03	CAP SMD ELEC 47mF 20% 25v 8.3m	#C315	23	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C235		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C315	25	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C237		014-07100-02	CAP TANT CHIP 1U0 3.2 X 1.6MM	#C315	26	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C239		016-07470-06	CAP SMD ELECT BI-P 4U7 50V 20%	#C315	30	015-21560-01	CAP CER 0805 5P6+-1/4P NPO 50V
C241		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C315	35	015-21560-01	CAP CER 0805 5P6+-1/4P NPO 50V
C242		014-08100-00	CAP TANT CHIP 10M 16VW +20%	#C315	36	015-21560-01	CAP CER 0805 5P6+-1/4P NPO 50V
C243		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C316	10	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C245		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C316	13	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C247		015-23150-01	CAP CER 0805 150P 5% NPO 50V	#C316	15	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C249		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C316	16	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C251		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C316	20	015-22270-01	CAP CER 0805 27P 5% NPO 50V
C253		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C316	23	015-22270-01	CAP CER 0805 27P 5% NPO 50V
C255		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C316	25	015-22270-01	CAP CER 0805 27P 5% NPO 50V
C257		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C316	26	015-22270-01	CAP CER 0805 27P 5% NPO 50V
C259		015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C316	30	015-22220-01	CAP CER 0805 22P 5% NPO 50V
C260		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#C316	35	015-22220-01	CAP CER 0805 22P 5% NPO 50V
C261		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	#C316	36	015-22220-01	CAP CER 0805 22P 5% NPO 50V
C263		016-09100-05	CAP SMD ELECT 100U 25V 20%	C317		020-07470-04	CAP ELE RA 4M7 25V 20%8X13 SOL
C265		016-07470-06	CAP SMD ELECT BI-P 4U7 50V 20%	C318		015-24100-08	CAP CER 0805 1N 10% X7R 50V
C267		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	C319		015-24100-08	CAP CER 0805 1N 10% X7R 50V
&C269	10	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V	C320		015-24100-08	CAP CER 0805 1N 10% X7R 50V
&C269	13	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V	#C321	10	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	15	015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C321	13	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	16	015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C321	15	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	20	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V	#C321	16	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	23	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V	#C321	20	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	25	015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C321	23	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	26	015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C321	25	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	30	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V	#C321	26	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C269	35	015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C321	30	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C269	36	015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C321	35	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C271	10	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C321	36	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C271	13	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	10	015-21680-01	CAP CER 0805 6P8+-1/4P NPO 50V
&C271	15	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	13	015-21680-01	CAP CER 0805 6P8+-1/4P NPO 50V
&C271	16	015-22560-01	CAP CER 0805 56P 5% NPO 50V	#C322	15	015-21680-01	CAP CER 0805 6P8+-1/4P NPO 50V
&C271	20	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	16	015-21680-01	CAP CER 0805 6P8+-1/4P NPO 50V
&C271	23	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	20	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C271	25	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	23	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C271	26	015-22560-01	CAP CER 0805 56P 5% NPO 50V	#C322	25	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C271	30	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	26	015-22100-01	CAP CER 0805 10P+-1/2P NPO 50V
&C271	35	015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C322	30	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
&C271	36	015-22560-01	CAP CER 0805 56P 5% NPO 50V	#C322	35	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C273		015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C322	36	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C275		015-23120-01	CAP CER 0805 120P 5% NPO 50V	#C323	10	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C277		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#C323	13	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C279		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#C323	15	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C281		015-25220-08	CAP CER 0805 22N 10% X7R 50V	#C323	16	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C283		015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C323	20	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C285		015-21470-01	CAP CER 0805 4P7+-1/4P NPO 50V	#C323	23	015-22330-01	CAP CER 0805 33P 5% NPO 50V
C287		016-09100-05	CAP SMD ELECT 100U 25V 20%	#C323	25	015-22330-01	CAP CER 0805 33P 5% NPO 50V
&C289	10	015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C323	26	015-22330-01	CAP CER 0805 33P 5% NPO 50V
&C289	13	015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C323	30	015-22270-01	CAP CER 0805 27P 5% NPO 50V
&C289	15	015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C323	35	015-22270-01	CAP CER 0805 27P 5% NPO 50V
&C289	16	015-25680-08	CAP CER 0805 68N 10% X7R 50V	#C323	36	015-22270-01	CAP CER 0805 27P 5% NPO 50V
&C289	20	015-25470-08	CAP CER 0805 47N 10% X7R 50V	C324		015-24100-08	CAP CER 0805 1N 10% X7R 50V
&C289	23	015-25470-08	CAP CER 0805 47N 10% X7R 50V	C325		015-06100-08	CAP CER 1206 100N 10% X7R 50V
&C289	25	015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C326	10	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C289	26	015-22560-01	CAP CER 0805 56P 5% NPO 50V	#C326	13	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C289	30	015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C326	15	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C289	35	015-25470-08	CAP CER 0805 47N 10% X7R 50V	#C326	16	015-22220-01	CAP CER 0805 22P 5% NPO 50V
&C289	36	015-25680-08	CAP CER 0805 68N 10% X7R 50V	#C326	20	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C291		014-08220-01	(L)CAP TANT 22UF10V276MSER	#C326	23	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C293		015-27100-10	CAP CER 0805 1M+80-20% Y5V 16V	#C326	25	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
%C294		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#C326	26	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
%C295		013-06470-00	CAP SMD POLYESTER 470N 63V 10%	#C326	30	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
C300A		016-08100-01	CAP EL 6X4 10M 20% 16V	#C326	35	015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
				#C327	10	015-21220-01	CAP CER 0805 2P2+-1/4P NPO 50V
				#C327	13	015-21220-01	CAP CER 0805 2P2+-1/4P NPO 50V
				#C327	15	015-21220-01	CAP CER 0805 2P2+-1/4P NPO 50V
				#C327	16	015-21220-01	CAP CER 0805 2P2+-1/4P NPO 50V
				#C327	20	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V
				#C327	23	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V
				#C327	25	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V
				#C327	26	015-21150-01	CAP CER 0805 1P5+-1/4P NPO 50V
				#C327	30	015-21330-01	CAP CER 0805 3P3+-1/4P NPO 50V
				#C327	35	015-21330-01	CAP CER 0805 3P3+-1/4P NPO 50V
				#C327	36	015-21330-01	CAP CER 0805 3P3+-1/4P NPO 50V

Ref	Var	IPN	Description	Ref	Var	IPN	Description
C328		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C750		014-08100-03	CAP TANT SMD 10U 35V 20%
C329		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C757		015-25220-08	CAP CER 0805 120P 10% X7R 50V
C330		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C759		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C331		015-25150-08	CAP CER 0805 15N 10% X7R 50V	C761		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C332		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C762		014-08220-01	(L)CAP TANT 22UF10V276MSER
C333		015-25100-08	CAP CER 0805 10N 10% X7R 50V	C764		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C334		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C765		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
C336		015-24100-08	CAP CER 0805 1N 10% X7R 50V	C767		015-24100-08	CAP CER 0805 1N 10% X7R 50V
C337		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C769		015-24100-08	CAP CER 0805 1N 10% X7R 50V
C340		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C770		014-08220-01	(L)CAP TANT 22UF10V276MSER
C341		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C772		014-08220-01	(L)CAP TANT 22UF10V276MSER
C342		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C774		013-06100-10	CAP SMD PPS 100N 100V 10%
#C345	10	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C776		015-24470-08	CAP CER 0805 4N7 10% X7R 50V
#C345	13	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C782		015-23120-01	CAP CER 0805 120P 5% NPO 50V
#C345	15	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C784		015-23120-01	CAP CER 0805 120P 5% NPO 50V
#C345	16	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C786		015-06100-08	CAP CER 1206 100N 10% X7R 50V
#C345	20	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C788		015-23120-01	CAP CER 0805 120P 5% NPO 50V
#C345	23	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C790		015-21820-01	CAP CER 0805 8P2+-1/4P NPO 50V
#C345	25	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C792		015-23120-01	CAP CER 0805 120P 5% NPO 50V
#C345	26	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C810		015-25470-08	CAP CER 0805 47N 10% X7R 50V
#C345	30	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C812		015-23100-01	CAP CER 0805 100P 5% NPO 50V
#C345	35	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C813		015-24100-08	CAP CER 0805 1N 10% X7R 50V
#C345	36	015-23120-01	CAP CER 0805 120P 5% NPO 50V	C822		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM
C350		015-24100-08	CAP CER 0805 1N 10% X7R 50V	C823		015-25220-08	CAP CER 0805 22N 10% X7R 50V
C351		015-24100-08	CAP CER 0805 1N 10% X7R 50V	C824		015-25470-08	CAP CER 0805 47N 10% X7R 50V
C354		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C826		015-23220-01	CAP CER 0805 220P 5% NPO 50V
C360		015-23120-01	CAP CER 0805 120P 5% NPO 50V	C827		015-22330-01	CAP CER 0805 33P 5% NPO 50V
C503		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	C828		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C505		015-25470-08	CAP CER 0805 47N 10% X7R 50V	C830		015-25470-08	CAP CER 0805 47N 10% X7R 50V
C510		015-25150-08	CAP CER 0805 15N 10% X7R 50V	C838		014-09100-00	CAP TANT SMD 100U 16V 20%
C513		015-25100-08	CAP CER 0805 10N 10% X7R 50V	C841		014-09100-00	CAP TANT SMD 100U 16V 20%
C514		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C844		015-25100-08	CAP CER 0805 10N 10% X7R 50V
C515		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C910		015-01680-06	CAP CER 1210 6P8 NPO500VGRM42
C516		015-23150-01	CAP CER 0805 150P 5% NPO 50V	C920		015-02120-06	CAP CER 1210 12P NPO500VGRM42
C535		015-06100-08	CAP CER 1206 100N 10% X7R 50V	C930		015-01680-06	CAP CER 1210 6P8 NPO500VGRM42
C536		015-23100-01	CAP CER 0805 100P 5% NPO 50V				
C537		015-23100-01	CAP CER 0805 100P 5% NPO 50V	D111		001-00012-90	S) DIODE MR2520L O-VOLT SUPP
C545		015-23150-01	CAP CER 0805 150P 5% NPO 50V	D111A		001-10024-00	DIODE LDP24M 24V SUR-PROT SMD
C546		015-23150-01	CAP CER 0805 150P 5% NPO 50V	D220		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23
C550		014-08220-01	(L)CAP TANT 22UF10V276MSER	D230		001-10010-40	DIODE SMD ZENER 33V BZG03-C33
C600		015-24100-08	CAP CER 0805 1N 10% X7R 50V	D240		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23
C601		015-24100-08	CAP CER 0805 1N 10% X7R 50V	D250		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23
C605		015-23120-01	CAP CER 0805 120P 5% NPO 50V	D260		001-10000-56	S) DIODE SMD BAW56 D-SW SOT23
C610A		015-25100-08	CAP CER 0805 10N 10% X7R 50V	D270		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23
C610B		014-09100-00	CAP TANT SMD 100U 16V 20%	D301		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23
C611A		014-09100-00	CAP TANT SMD 100U 16V 20%	D302		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23
C611B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	D303		001-10000-18	S) DIODE SMD BAT18 S-SW SOT23
C615		015-24100-08	CAP CER 0805 1N 10% X7R 50V	D510		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23
C616		015-24100-08	CAP CER 0805 1N 10% X7R 50V	D610		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23
C623		015-23120-01	CAP CER 0805 120P 5% NPO 50V	D620		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23
C625		020-09470-07	CAPEL470M16V20%V 8*20 3.5L.ESR	D630		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23
C626		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	D635		001-10065-00	DIODE SHTKY SOD123 BAT65 BAT54
C628		015-24100-08	CAP CER 0805 1N 10% X7R 50V	D640		001-10000-70	S) DIODE SMD BAV70 D-SW SOT23
C630		015-06100-08	CAP CER 1206 100N 10% X7R 50V	D645		001-10010-40	DIODE SMD ZENER 33V BZG03-C33
C631A		015-06100-08	CAP CER 1206 100N 10% X7R 50V	D710		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23
C634		014-08100-00	CAP TANT CHIP 10M 16VW +20%	D720		001-10000-99	S) DIODE SMD BAV99 D-SW SOT23
C636		015-06100-08	CAP CER 1206 100N 10% X7R 50V	D730		001-10065-00	DIODE SHTKY SOD123 BAT65 BAT54
C638		015-23120-01	CAP CER 0805 120P 5% NPO 50V	D740		001-10065-00	DIODE SHTKY SOD123 BAT65 BAT54
C640		015-24100-08	CAP CER 0805 1N 10% X7R 50V	D810		001-10065-00	DIODE SHTKY SOD123 BAT65 BAT54
C655		015-24100-08	CAP CER 0805 1N 10% X7R 50V				
C660		015-06100-08	CAP CER 1206 100N 10% X7R 50V	IC210		002-10003-24	S) IC SMD 324 4X O-AMP SO14
C665		014-08100-03	CAP TANT SMD 10U 35V 20%	IC220		002-10126-70	S) IC SMD DS1267S10K 2XDIG POT
C670		014-07330-10	CAP TANT SMD 3U3 35V 10%	IC230		002-10003-24	S) IC SMD 324 4X O-AMP SO14
C673		015-24470-08	CAP CER 0805 4N7 10% X7R 50V	IC240		002-10040-53	S)MCM14053B SMD BREAK B4 MAKE
C677		014-07100-02	CAP TANT CHIP 1U0 3.2 X 1.6MM	IC250		002-10020-50	IC SMD 4N25A OPTOCOUPLER
C681		015-06100-08	CAP CER 1206 100N 10% X7R 50V	IC260		002-10003-24	S) IC SMD 324 4X O-AMP SO14
C684		014-08100-00	CAP TANT CHIP 10M 16VW +20%	IC300		002-10003-58	S) IC SMD LM358 DUAL O-AMP
C687		015-23120-01	CAP CER 0805 120P 5% NPO 50V	IC610		002-10078-05	S) IC SMD 78L05 5V REG
C690		015-06100-08	CAP CER 1206 100N 10% X7R 50V	IC630		002-10003-17	(S) IC LM317L REG SO-8 100MA
C693		014-08100-00	CAP TANT CHIP 10M 16VW +20%	IC640		002-10003-58	S) IC SMD LM358 DUAL O-AMP
C700		015-06100-08	CAP CER 1206 100N 10% X7R 50V	IC650		002-10012-32	SMD DS1232LPS-2 LP RESET&W-DOG
C703		015-24100-08	CAP CER 0805 1N 10% X7R 50V	=IC700		539-00010-50	TCXO 12.8MHZ +-1PPM -20 +70C
C706		015-22470-01	CAP CER 0805 47P 5% NPO 50V	IC710		002-74900-04	S) IC SMD 74HC04D 6X INV BUFFD
C708		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	IC720		002-74910-04	S) IC SMD 74HC04 6X INV
C709		015-06100-08	CAP CER 1206 100N 10% X7R 50V	IC730		002-10045-20	S) IC SMD 74HC4520T 2XCTR 4BIT
C710		015-25100-08	CAP CER 0805 10N 10% X7R 50V	IC740		002-14519-10	S) IC MC145191F SMD SYNTH
C711		015-06100-08	CAP CER 1206 100N 10% X7R 50V	IC750		002-10330-78	S) IC MC33078D 2X AMP LO NOISE
C712		015-22470-01	CAP CER 0805 47P 5% NPO 50V	IC810		002-08951-20	S) IC AT89C51 PLCC44 MIC 12MHZ
C714		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	IC820		002-12416-00	S)IC SMD AT24C16N-10SC EEPROM
C719		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	IC830		002-10003-24	S) IC SMD 324 4X O-AMP SO14
C720		015-06100-08	CAP CER 1206 100N 10% X7R 50V				
C722		015-06100-08	CAP CER 1206 100N 10% X7R 50V	L300		065-10004-20	BEAD FE SMD CBD 4.6/3/3-4S2
C724		014-08220-01	(L)CAP TANT 22UF10V276MSER	L302		056-10330-02	(L) IND SMD 330NH
C725		014-08220-01	(L)CAP TANT 22UF10V276MSER	L303		065-10004-20	BEAD FE SMD CBD 4.6/3/3-4S2
C726		015-25100-08	CAP CER 0805 10N 10% X7R 50V	L305		056-10330-02	(L) IND SMD 330NH
C727		015-23220-01	CAP CER 0805 220P 5% NPO 50V	#L307	10	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C729		015-23220-01	CAP CER 0805 220P 5% NPO 50V	#L307	13	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
%C733		015-23470-08	CAP CER 0805 470P 10% X7R 50V	#L307	15	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C735		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#L307	16	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C736		015-22470-01	CAP CER 0805 47P 5% NPO 50V	#L307	20	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C740A		015-24100-08	CAP CER 0805 1N 10% X7R 50V	#L307	23	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C740B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L307	25	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C741A		014-07470-00	CAP TANT CHIP 4U7 3.5 X 2.8MM	#L307	26	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM
C741B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L307	30	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C742A		015-06100-08	CAP CER 1206 100N 10% X7R 50V	#L307	35	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C742B		015-25100-08	CAP CER 0805 10N 10% X7R 50V	#L307	36	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM
C743		015-22470-01	CAP CER 0805 47P 5% NPO 50V	L309		065-00010-01	BEAD FERR 3B 6 HOLE
C745		015-23120-01	CAP CER 0805 120P 5% NPO 50V	L312		052-08130-65	COIL A/W 6.5T/3.0MM HOR 0.8MM

Ref	Var	IPN	Description	Ref	Var	IPN	Description
#L313	10	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM	R226		036-15100-00	RES M/F 0805 10K 5%
#L313	13	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM	R227		036-14220-00	RES M/F 0805 2K2 5%
#L313	15	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM	R228		036-13120-00	RES M/F 0805 120E 5%
#L313	16	052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM	R229		036-16470-00	RES M/F 0805 470K 5%
#L313	20	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R230		036-16100-00	RES M/F 0805 100K 5%
#L313	23	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R231		036-15100-00	RES M/F 0805 10K 5%
#L313	25	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R232		036-16330-00	RES M/F 0805 330K 5%
#L313	26	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R233		036-16100-00	RES M/F 0805 100K 5%
#L313	30	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R235		036-14470-00	RES M/F 0805 4K7 5%
#L313	35	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R237		036-15470-00	RES M/F 0805 47K 5%
#L313	36	052-08120-15	COIL A/W 1.5T/2MM HOR 0.8MM	R238		036-15470-00	RES M/F 0805 47K 5%
L314		056-10330-02	(L) IND SMD 330NH	R239		036-14150-00	RES M/F 0805 1K5 5%
L350		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	R241		036-14470-00	RES M/F 0805 4K7 5%
L535		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	R242		036-14220-00	RES M/F 0805 2K2 5%
L600		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	R244		036-15100-00	RES M/F 0805 10K 5%
L615		057-10120-03	IND 805 EMI SUP 120E@100M 0.2A	R245		036-16100-00	RES M/F 0805 100K 5%
L750		052-08125-15	COIL A/W 1.5T/2.5MM HOR 0.8MM	R247		036-15100-00	RES M/F 0805 10K 5%
L910		052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM	R248		036-16100-00	RES M/F 0805 100K 5%
L920		052-08130-15	COIL A/W 1.5T/3.0MM HOR 0.8MM	R249		036-16100-00	RES M/F 0805 100K 5%
PL100		070-01001-00	D-RANGE 15 WAY COMPL T800	R251		036-16100-00	RES M/F 0805 100K 5%
PL205		240-00020-67	HEADER 6W 2X3 PCB MTG STD	R253		036-16100-00	RES M/F 0805 100K 5%
PL210		240-00020-67	HEADER 6W 2X3 PCB MTG STD	R254		036-16100-00	RES M/F 0805 100K 5%
PL215		240-00020-44	HEADER 10W X2R PCB MTG 5*2	R255		036-15100-00	RES M/F 0805 10K 5%
PL220		240-00020-67	HEADER 6W 2X3 PCB MTG STD	R256		036-15470-00	RES M/F 0805 47K 5%
Q210		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	R257		036-16330-00	RES M/F 0805 330K 5%
Q220		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23	R258		036-16150-00	RES M/F 0805 150K 5%
Q230		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	R259		036-15220-00	RES M/F 0805 22K 5%
Q240		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	R260		036-15470-00	RES M/F 0805 47K 5%
Q250		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23	R262		036-15470-00	RES M/F 0805 47K 5%
Q260		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	R263		036-14470-00	RES M/F 0805 4K7 5%
Q270		000-10004-10	S) XSTR SMD MJD41C NPN SW DPAK	&R264	10	036-15220-00	RES M/F 0805 22K 5%
Q301		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R264	13	036-15220-00	RES M/F 0805 22K 5%
Q302		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R264	15	036-15270-10	RES M/F 0805 27K 1%
Q304		000-00005-55	S) XSTR MRF555 NPN RF L/PWR	&R264	16	036-15220-00	RES M/F 0805 22K 5%
Q305		000-00032-56	S) XSTR MRF630 NPN T039 UHF 3W	&R264	20	036-15220-00	RES M/F 0805 22K 5%
Q306		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R264	23	036-15220-00	RES M/F 0805 22K 5%
Q307		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R264	25	036-15270-10	RES M/F 0805 27K 1%
Q308		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R264	26	036-15220-00	RES M/F 0805 22K 5%
Q309		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	&R264	30	036-15220-00	RES M/F 0805 22K 5%
Q310		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R264	35	036-15270-10	RES M/F 0805 27K 1%
Q311		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R266	36	036-15220-00	RES M/F 0805 22K 5%
Q315		000-00012-15	S) XSTR BD234 PNP AF PWR TO126	&R265	10	036-15150-00	RES M/F 0805 15K 5%
Q505		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R265	13	036-15150-00	RES M/F 0805 15K 5%
Q510		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R265	15	036-15180-10	RES M/F 0805 18K 1%
Q520		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R265	16	036-15150-00	RES M/F 0805 15K 5%
Q530		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R265	20	036-15150-00	RES M/F 0805 15K 5%
Q540		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R265	23	036-15150-00	RES M/F 0805 15K 5%
Q550		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R265	25	036-15180-10	RES M/F 0805 18K 1%
Q610		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R265	26	036-15150-00	RES M/F 0805 15K 5%
Q620		000-00012-15	S) XSTR BD234 PNP AF PWR TO126	&R265	30	036-15150-00	RES M/F 0805 15K 5%
Q630		000-10003-00	S) XSTR BSR30 PNP AF SOT-89	&R265	35	036-15180-10	RES M/F 0805 18K 1%
Q660		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23	&R265	36	036-15150-00	RES M/F 0805 15K 5%
Q670		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	&R266	10	036-15470-10	RES M/F 0805 47K 1%
Q710		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R266	13	036-15470-10	RES M/F 0805 47K 1%
Q720		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	&R266	15	036-15560-00	RES M/F 0805 56K 5%
Q730		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R266	16	036-15470-10	RES M/F 0805 47K 1%
Q740		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	&R266	20	036-15470-10	RES M/F 0805 47K 5%
Q750		000-10008-07	S) XSTR SMD BC807 PNP SOT23 AF	&R266	23	036-15470-10	RES M/F 0805 47K 1%
Q760		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R266	25	036-15560-00	RES M/F 0805 56K 5%
Q770		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	&R266	26	036-15470-10	RES M/F 0805 47K 1%
Q775		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	&R266	30	036-15470-10	RES M/F 0805 47K 1%
Q780		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	&R266	35	036-15470-10	RES M/F 0805 47K 1%
Q785		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	R267		036-14220-00	RES M/F 0805 2K2 5%
Q790		000-10003-12	S) XSTR SMD BFR31 N JFET SOT23	R268		036-13100-00	RES M/F 0805 100E 5%
Q795		000-10057-10	S) XSTR SMD BR571 NPN SOT23	R269		036-15100-00	RES M/F 0805 10K 5%
Q810		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	R270		036-14120-00	RES M/F 0805 1K2 5%
Q820		000-10008-17	S) XSTR SMD BC817-25 NPN SOT23	R271		036-17100-00	RES M/F 0805 1M 5%
Q830		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	R272		036-13560-00	RES M/F 0805 560E 5%
Q840		000-10008-57	S) XSTR SMD BCW70 PNP SOT23 SS	R273		036-15120-00	RES M/F 0805 12K 5%
Q850		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	R274		036-15150-00	RES M/F 0805 15K 5%
Q860		000-10008-48	S) XSTR SMD BCW60 NPN SOT23 SS	R275		036-14270-00	RES M/F 0805 2K7 5%
R160		036-12100-00	RES M/F 0805 10E 5%	R277		036-16100-00	RES M/F 0805 100K 5%
R201		036-13560-00	RES M/F 0805 560E 5%	R278		036-16120-00	RES M/F 0805 120K 5%
R202		036-14100-00	RES M/F 0805 1K 5%	R279		036-17100-00	RES M/F 0805 1M 5%
R204		036-14220-00	RES M/F 0805 2K2 5%	R280		036-15100-00	RES M/F 0805 10K 5%
R205		036-13220-00	RES M/F 0805 220E 5%	R282		036-15560-00	RES M/F 0805 56K 5%
R206		036-14100-00	RES M/F 0805 1K 5%	R283		036-15560-00	RES M/F 0805 56K 5%
R207		036-14390-00	RES M/F 0805 3K9 5%	R284		036-17100-00	RES M/F 0805 1M 5%
R208		036-13560-00	RES M/F 0805 560E 5%	R285		036-10000-00	RES M/F 0805 ZERO OHM
R209		036-15100-00	RES M/F 0805 10K 5%	R286		036-14220-00	RES M/F 0805 2K2 5%
R210		036-14220-00	RES M/F 0805 2K2 5%	R287		036-15100-00	RES M/F 0805 10K 5%
R211		036-13470-00	RES M/F 0805 470E 5%	R288		036-15120-00	RES M/F 0805 12K 5%
R212		036-16100-00	RES M/F 0805 100K 5%	R289		036-16100-00	RES M/F 0805 100K 5%
R213		036-15100-00	RES M/F 0805 10K 5%	&R290	10	036-13560-00	RES M/F 0805 560E 5%
R214		036-14820-00	RES M/F 0805 8K2 5%	&R290	13	036-13560-00	RES M/F 0805 560E 5%
R215		036-16100-00	RES M/F 0805 100K 5%	&R290	15	036-13560-00	RES M/F 0805 560E 5%
R216		036-16100-00	RES M/F 0805 100K 5%	&R290	16	036-13680-00	RES M/F 0805 680E 5%
R217		036-14100-00	RES M/F 0805 1K 5%	&R290	20	036-13560-00	RES M/F 0805 560E 5%
R218		036-16150-00	RES M/F 0805 150K 5%	&R290	23	036-13560-00	RES M/F 0805 560E 5%
R219		036-14220-00	RES M/F 0805 2K2 5%	&R290	25	036-13560-00	RES M/F 0805 560E 5%
R220		036-13470-00	RES M/F 0805 470E 5%	&R290	26	036-13680-00	RES M/F 0805 680E 5%
R221		036-14150-00	RES M/F 0805 1K5 5%	&R290	30	036-13560-00	RES M/F 0805 560E 5%
R223		036-17100-00	RES M/F 0805 1M 5%	&R290	35	036-13560-00	RES M/F 0805 560E 5%
R224		036-14680-00	RES M/F 0805 6K8 5%	&R290	36	036-13680-00	RES M/F 0805 680E 5%
R225		036-17100-00	RES M/F 0805 1M 5%	R291		036-10000-00	RES M/F 0805 ZERO OHM
				R292		036-14470-00	RES M/F 0805 4K7 5%
				R293		036-15470-00	RES M/F 0805 47K 5%

Ref	Var	IPN	Description	Ref	Var	IPN	Description
R294		036-14470-00	RES M/F 0805 4K7 5%	R348		036-14100-00	RES M/F 0805 1K 5%
R295		036-14270-00	RES M/F 0805 2K7 5%	R349		036-16100-00	RES M/F 0805 100K 5%
R296		036-14100-00	RES M/F 0805 1K 5%	R350		036-12220-00	RES M/F 0805 22E 5%
R297		036-14560-00	RES M/F 0805 5K6 5%	R355		036-14100-00	RES M/F 0805 1K 5%
%R298		036-16100-00	RES M/F 0805 100K 5%	R356		036-15150-00	RES M/F 0805 15K 5%
R299		036-14270-00	RES M/F 0805 2K7 5%	R357		036-15150-00	RES M/F 0805 15K 5%
R300		036-12220-00	RES M/F 0805 22E 5%	R358		036-14470-00	RES M/F 0805 4K7 5%
R301		036-15100-00	RES M/F 0805 10K 5%	R359		036-14100-00	RES M/F 0805 1K 5%
R302		036-15220-00	RES M/F 0805 22K 5%	R501		036-15100-00	RES M/F 0805 10K 5%
R303		036-14270-00	RES M/F 0805 2K7 5%	R502		036-15100-00	RES M/F 0805 10K 5%
R304		036-16100-00	RES M/F 0805 100K 5%	R503		036-14560-00	RES M/F 0805 5K6 5%
R305		036-15220-00	RES M/F 0805 22K 5%	R504		036-13330-00	RES M/F 0805 330E 5%
#R306	10	036-14150-00	RES M/F 0805 1K5 5%	R505		036-15150-00	RES M/F 0805 15K 5%
#R306	13	036-14150-00	RES M/F 0805 1K5 5%	R510		036-14150-00	RES M/F 0805 1K5 5%
#R306	15	036-14150-00	RES M/F 0805 1K5 5%	R514		036-12330-00	RES M/F 0805 33E 5%
#R306	16	036-14150-00	RES M/F 0805 1K5 5%	R515		036-12560-00	RES M/F 0805 56E 5%
#R306	20	036-14220-00	RES M/F 0805 2K2 5%	R517		036-13330-00	RES M/F 0805 330E 5%
#R306	23	036-14220-00	RES M/F 0805 2K2 5%	R518		036-12180-00	RES M/F 0805 18E 5%
#R306	25	036-14220-00	RES M/F 0805 2K2 5%	R519		036-13330-00	RES M/F 0805 330E 5%
#R306	26	036-14220-00	RES M/F 0805 2K2 5%	R520		036-16120-00	RES M/F 0805 120K 5%
#R306	30	036-14150-00	RES M/F 0805 1K5 5%	R525		036-15470-00	RES M/F 0805 47K 5%
#R306	35	036-14150-00	RES M/F 0805 1K5 5%	R530		036-15220-00	RES M/F 0805 22K 5%
#R306	36	036-14150-00	RES M/F 0805 1K5 5%	R535		036-15100-00	RES M/F 0805 10K 5%
#R307	10	036-13470-00	RES M/F 0805 470E 5%	R540		036-14220-00	RES M/F 0805 2K2 5%
#R307	13	036-13470-00	RES M/F 0805 470E 5%	R545		036-14470-00	RES M/F 0805 4K7 5%
#R307	15	036-13470-00	RES M/F 0805 470E 5%	%R550		036-14470-00	RES M/F 0805 4K7 5%
#R307	16	036-13470-00	RES M/F 0805 470E 5%	R555		036-14470-00	RES M/F 0805 4K7 5%
#R307	20	036-13150-00	RES M/F 0805 150E 5%	R560		036-13470-00	RES M/F 0805 470E 5%
#R307	23	036-13150-00	RES M/F 0805 150E 5%	R609		036-14100-00	RES M/F 0805 1K 5%
#R307	25	036-13150-00	RES M/F 0805 150E 5%	R613		036-13560-00	RES M/F 0805 560E 5%
#R307	26	036-13150-00	RES M/F 0805 150E 5%	R615		036-13100-00	RES M/F 0805 100E 5%
#R307	30	036-13470-00	RES M/F 0805 470E 5%	R617		036-10000-00	RES M/F 0805 ZERO OHM
#R307	35	036-13470-00	RES M/F 0805 470E 5%	R619		036-01100-10	RES 1 OHM 1 WATT 2512 CHIP
#R307	36	036-13470-00	RES M/F 0805 470E 5%	R621		036-01100-10	RES 1 OHM 1 WATT 2512 CHIP
R308		036-14220-00	RES M/F 0805 2K2 5%	R625		036-14100-00	RES M/F 0805 1K 5%
R309		036-15100-00	RES M/F 0805 10K 5%	R629		036-03270-10	RES 270 OHM 1 WATT 2512 CHIP
R310		036-13470-00	RES M/F 0805 470E 5%	R633		036-14680-00	RES M/F 0805 6K8 5%
R311		036-13470-00	RES M/F 0805 470E 5%	R637		036-12220-00	RES M/F 0805 22E 5%
R312		036-14100-00	RES M/F 0805 1K 5%	R638		036-12220-00	RES M/F 0805 22E 5%
R313		036-12220-00	RES M/F 0805 22E 5%	R640		036-12100-00	RES M/F 0805 10E 5%
R314		036-13470-00	RES M/F 0805 470E 5%	R641		036-14150-00	RES M/F 0805 1K5 5%
R315		036-03110-10	RES 10R 1W SMD 2512	R645		036-13470-00	RES M/F 0805 470E 5%
R322		036-12100-00	RES M/F 0805 10E 5%	R649		036-14470-00	RES M/F 0805 4K7 5%
R323		036-14150-00	RES M/F 0805 1K5 5%	R653		036-15100-00	RES M/F 0805 10K 5%
R324		036-12470-00	RES M/F 0805 47E 5%	R655		036-10000-00	RES M/F 0805 ZERO OHM
R325		036-13560-00	RES M/F 0805 560E 5%	R656		036-10000-00	RES M/F 0805 ZERO OHM
R326		036-12470-00	RES M/F 0805 47E 5%	R657		036-15100-00	RES M/F 0805 10K 5%
R327		036-14100-00	RES M/F 0805 1K 5%	R661		036-15100-00	RES M/F 0805 10K 5%
R328		036-13470-00	RES M/F 0805 470E 5%	R665		036-16100-00	RES M/F 0805 100K 5%
R329		036-12100-00	RES M/F 0805 10E 5%	R669		036-15470-00	RES M/F 0805 47K 5%
#R330	10	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R673		036-16100-00	RES M/F 0805 100K 5%
#R330	13	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R677		036-15470-00	RES M/F 0805 47K 5%
#R330	15	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R681		036-13100-00	RES M/F 0805 100E 5%
#R330	16	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R685		036-15150-00	RES M/F 0805 15K 5%
#R330	20	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R689		036-12100-00	RES M/F 0805 10E 5%
#R330	23	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R693		036-16100-00	RES M/F 0805 100K 5%
#R330	25	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R696		036-15560-00	RES M/F 0805 56K 5%
#R330	26	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R701		036-12220-00	RES M/F 0805 22E 5%
#R330	30	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6	R702		036-17100-00	RES M/F 0805 1M 5%
#R330	35	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6	R703		036-17100-00	RES M/F 0805 1M 5%
#R330	36	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6	R704		036-15180-00	RES M/F 0805 18K 5%
#R331	10	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R706		036-12100-00	RES M/F 0805 10E 5%
#R331	13	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R708		036-17100-00	RES M/F 0805 1M 5%
#R331	15	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R710		036-13100-00	RES M/F 0805 100E 5%
#R331	16	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R711		036-13100-00	RES M/F 0805 100E 5%
#R331	20	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R712		036-12100-00	RES M/F 0805 10E 5%
#R331	23	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R713		036-10000-00	RES M/F 0805 ZERO OHM
#R331	25	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	R714		036-12100-00	RES M/F 0805 10E 5%
#R331	26	030-52120-20	RES M/F 12E 5% 4X1.6 0.2"	%R715		036-14100-00	RES M/F 0805 1K 5%
#R331	30	030-52220-20	RES FILM AI 22E 5% 0.4W 4X1.6	R717		036-14270-00	RES M/F 0805 2K7 5%
#R331	35	030-52220-20	RES FILM AI 22E 5% 0.4W 4X1.6	R718		036-16150-00	RES M/F 0805 150K 5%
#R331	36	030-52220-20	RES FILM AI 22E 5% 0.4W 4X1.6	R719		036-16150-00	RES M/F 0805 150K 5%
#R332	10	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R720		036-15390-00	RES M/F 0805 39K 5%
#R332	13	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R721		036-15100-00	RES M/F 0805 10K 5%
#R332	15	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R722		036-15100-00	RES M/F 0805 10K 5%
#R332	16	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R723		036-14270-00	RES M/F 0805 2K7 5%
#R332	20	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R725		036-15390-00	RES M/F 0805 39K 5%
#R332	23	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	%R726		036-13100-00	RES M/F 0805 100E 5%
#R332	25	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R727		036-15100-00	RES M/F 0805 10K 5%
#R332	26	030-53470-20	RES FILM AI 470E 5% 0.4W 4X1.6	R728		036-15100-00	RES M/F 0805 10K 5%
#R332	30	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6	R734		036-13470-00	RES M/F 0805 470E 5%
#R332	35	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6	R735		036-13470-00	RES M/F 0805 470E 5%
#R332	36	030-53220-20	RES FILM AI 220E 5% 0.4W 4X1.6	R736		036-13470-00	RES M/F 0805 470E 5%
R333		036-12470-00	RES M/F 0805 47E 5%	R742		036-13150-00	RES M/F 0805 150E 5%
R334		032-33100-10	RES M/F PWR 100E 5% 2W 12X4.5	R743		036-13150-00	RES M/F 0805 150E 5%
R335		036-12100-00	RES M/F 0805 10E 5%	R744		036-12220-00	RES M/F 0805 22E 5%
R336		036-16150-00	RES M/F 0805 150K 5%	R746		036-12220-00	RES M/F 0805 22E 5%
R337		036-16150-00	RES M/F 0805 150K 5%	R747		036-12220-00	RES M/F 0805 22E 5%
R338		036-16150-00	RES M/F 0805 150K 5%	R748		036-15470-00	RES M/F 0805 47K 5%
R339		036-16150-00	RES M/F 0805 150K 5%	R749		036-15470-00	RES M/F 0805 47K 5%
R340		036-14150-00	RES M/F 0805 1K5 5%	R750		036-12220-00	RES M/F 0805 22E 5%
R341		036-15100-00	RES M/F 0805 10K 5%	R752		036-12220-00	RES M/F 0805 22E 5%
R342		036-15100-00	RES M/F 0805 10K 5%	R753		036-17100-00	RES M/F 0805 1M 5%
R343		036-15150-00	RES M/F 0805 15K 5%	R754		036-14100-00	RES M/F 0805 1K 5%
R344		036-15470-00	RES M/F 0805 47K 5%	R756		036-15120-00	RES M/F 0805 12K 5%
R345		036-16120-00	RES M/F 0805 120K 5%	R757		036-15120-00	RES M/F 0805 12K 5%
R346		036-15100-00	RES M/F 0805 10K 5%	R758		036-14120-00	RES M/F 0805 1K2 5%
R347		036-14100-00	RES M/F 0805 1K 5%	R759		036-13330-00	RES M/F 0805 330E 5%

Ref	Var	IPN	Description	Ref	Var	IPN	Description
R760		036-13180-00	RES M/F 0805 180E 5%	T210		053-00010-17	XFMR T4030 LINE MATCH POTCORE
R762		036-13100-00	RES M/F 0805 100E 5%	T610		050-00016-50	COIL TAIT NO 650 455KHZ
R763		036-13100-00	RES M/F 0805 100E 5%				
R765		036-13680-00	RES M/F 0805 680E 5%				
R766		036-14100-00	RES M/F 0805 1K 5%				
R767		036-13680-00	RES M/F 0805 680E 5%				
R769		036-13180-00	RES M/F 0805 180E 5%				
R771		036-14820-00	RES M/F 0805 8K2 5%				
R772		036-15220-00	RES M/F 0805 22K 5%				
R774		036-14820-00	RES M/F 0805 8K2 5%				
R775		036-15180-00	RES M/F 0805 18K 5%				
R777		036-14220-00	RES M/F 0805 2K2 5%				
R780		036-12680-00	RES M/F 0805 68E 5%				
R782		036-12180-00	RES M/F 0805 18E 5%				
R784		036-13120-00	RES M/F 0805 120E 5%				
R785		036-14330-00	RES M/F 0805 3K3 5%				
R786		036-12100-00	RES M/F 0805 10E 5%				
R787		036-12100-00	RES M/F 0805 10E 5%				
R790		036-13390-00	RES M/F 0805 390E 5%				
R791		036-14100-00	RES M/F 0805 1K 5%				
R801		036-16150-00	RES M/F 0805 150K 5%				
R802		036-15470-00	RES M/F 0805 47K 5%				
R808		036-12100-00	RES M/F 0805 10E 5%				
R809		036-14470-00	RES M/F 0805 4K7 5%				
R810		036-14470-00	RES M/F 0805 4K7 5%				
R811		036-14470-00	RES M/F 0805 4K7 5%				
R812		036-14470-00	RES M/F 0805 4K7 5%				
R813		036-14470-00	RES M/F 0805 4K7 5%				
R815		036-15470-00	RES M/F 0805 47K 5%				
R816		036-16150-00	RES M/F 0805 150K 5%				
R818		036-14470-00	RES M/F 0805 4K7 5%				
R819		036-14470-00	RES M/F 0805 4K7 5%				
R821		036-15470-00	RES M/F 0805 47K 5%				
R822		036-15470-00	RES M/F 0805 47K 5%				
R824		036-14220-00	RES M/F 0805 2K2 5%				
R825		036-14220-00	RES M/F 0805 2K2 5%				
R826		036-14220-00	RES M/F 0805 2K2 5%				
R827		036-14220-00	RES M/F 0805 2K2 5%				
R828		036-14220-00	RES M/F 0805 2K2 5%				
R829		036-14220-00	RES M/F 0805 2K2 5%				
R830		036-14220-00	RES M/F 0805 2K2 5%				
R831		036-14220-00	RES M/F 0805 2K2 5%				
R832		036-14220-00	RES M/F 0805 2K2 5%				
R833		036-14220-00	RES M/F 0805 2K2 5%				
R835		036-14220-00	RES M/F 0805 2K2 5%				
R836		036-14220-00	RES M/F 0805 2K2 5%				
R837		036-14220-00	RES M/F 0805 2K2 5%				
R840		036-14220-00	RES M/F 0805 2K2 5%				
R841		036-14220-00	RES M/F 0805 2K2 5%				
R842		036-14220-00	RES M/F 0805 2K2 5%				
R843		036-14220-00	RES M/F 0805 2K2 5%				
R845		036-13470-00	RES M/F 0805 470E 5%				
R847		036-13470-00	RES M/F 0805 470E 5%				
R848		036-14470-00	RES M/F 0805 4K7 5%				
R849		036-13470-00	RES M/F 0805 470E 5%				
R850		036-13470-00	RES M/F 0805 470E 5%				
R853		036-14470-00	RES M/F 0805 4K7 5%				
R854		036-14470-00	RES M/F 0805 4K7 5%				
R855		036-14470-00	RES M/F 0805 4K7 5%				
R859		036-16150-00	RES M/F 0805 150K 5%				
R861		036-16150-00	RES M/F 0805 150K 5%				
R863		036-16150-00	RES M/F 0805 150K 5%				
R865		036-16100-00	RES M/F 0805 100K 5%				
R867		036-16100-00	RES M/F 0805 100K 5%				
R871		036-15470-00	RES M/F 0805 47K 5%				
R872		036-14470-00	RES M/F 0805 4K7 5%				
R873		036-15330-00	RES M/F 0805 33K 5%				
R874		036-14470-00	RES M/F 0805 4K7 5%				
R875		036-15470-00	RES M/F 0805 47K 5%				
R876		036-14470-00	RES M/F 0805 4K7 5%				
R877		036-14470-00	RES M/F 0805 4K7 5%				
R879		036-15100-00	RES M/F 0805 10K 5%				
RV210		040-05100-23	POT 10K LOG PCB 15MM SLOT SFT				
RV220		042-05500-05	RES PRESET SMD 50K CER 4MM SQ				
RV805		042-05200-05	RES PRESET SMD 20K CER 4MM SQ				
SK200		240-10000-05	CONN SMD SKT 8W 2R M-MATCH				
SK205		240-02020-05	SKT STEREO PHONE JACK PCB MTG				
SK310		240-02100-44	SKT COAX MINI JACK PCB MT ANG.				
SK410		240-02100-44	SKT COAX MINI JACK PCB MT ANG.				
SK501		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK502		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK503		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK504		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK505		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK513		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK522		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK531		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK532		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK533		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK534		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK535		240-04021-77	SKT JACK 1.3 PCB MT 64W				
SK805		240-10000-07	CONN SMD SKT 16W 2R M-MATCH				
SK810		240-04020-42	SKT 44 PIN SMD PLCC				
SW230		232-00010-26	SWITCH PUSH SPDT R-ANG PCB MTG				

T857 Mechanical & Miscellaneous Parts (220-01398-04)

IPN	Legend	Description	IPN	Legend	Description
008-00014-79		S)LED 3MM RED WITH WIRE			
008-00014-80		S)LED 3MM GREEN WITH WIRE			
070-01001-00	1	D-RANGE 15 WAY COMPL T800			
219-02610-00		COAX 220MM 2 MINI PIN CRIMP Connects SK310 to SK410.			
220-01145-02	2	PCB T85X VCO			
220-01398-04	3	PCB T857 SERIES II TOP			
232-00020-26	4	BUTTON 232-00010-26 SWITCH			
240-02100-06	5	SKT COAX N TYPE PNL MTG OP-TER			
240-04020-62		SKT 2 W RECEP SHORTING LINK PL205/210/215/220.			
303-11169-04	6	CHASSIS PAINTED T800 SERIES			
303-23118-00	7	COVER A3M2247 D RANGE T855/7			
303-50074-00	8	CLIP A3M2246 SPRING CLAMP T857			
303-50078-00	9	CLIP A4M2630 SPR. CABLE CLAMP			
308-01007-01	10	HANDLE BASE STATION SERIES II			
312-01052-02	11	LID TOP T800 SER II PTND			
312-01053-02	12	LID BOTTOM T800 SER II PNTD			
316-06619-00	13	PNL FRT EX, NO EX OUT SER II			
345-00040-10	14	SCRW M3X6MM P/POZ ST BZ			
349-00020-36	15	LIM)SCREW TT M3X8m PANTORX BLK			
349-00020-43	16	SCRW T/T M4X12MM P/POZ BZ			
349-00020-45	17	SCRW T/T M4X20MM P/POZ BZ			
350-00016-42	18	SPACER 5MM HI 8MM ST 2.5MM HO			
352-00010-08	19	NUT M3 COLD FORM HEX ST BZ			
352-00010-29	20	NUT M4 NYLOC HEX			
353-00010-10	21	WSHR M3 FLAT 7MMX0.6MM ST BZ			
353-00010-13	22	WSHR M3 S/PROOF INT BZ			
353-00010-24	23	WSHR M4X8MM FLAT			
362-00010-23	24	GASKET SIL TO-220 CLIP MTG.			
362-00010-33	25	GROMMET LED MTG 3MM			
365-00011-53		LABEL 104X37MM			
365-00100-20		LABEL WHITE S/A 28X11MM			
365-01541-00		LABEL TX/RX/EX TYPE APR/SER NO			
399-00010-51		BAG PLASTIC 75X100MM			
410-01081-01		CRT T800 SERIES II			
410-01082-01		CRTN 10 T800 KIWI 423X410X360			

replace A4 pages C6.3.37/C6.3.38 with A3 pages C6.3.37/C6.3.38

replace A4 pages C6.3.37/C6.3.38 with A3 pages C6.3.37/C6.3.38

T857 Grid Reference Index (IPN 220-01398-04)**How To Use This Grid Reference Index**


The first digit in the PCB layout reference is a "1" or "2", indicating the top or bottom side layout respectively, and the last two characters give the location of the component on that diagram.

The first digit in the circuit diagram reference is the sheet number, and the last two characters give the location of the component on that sheet.

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
C201	1:C1	2-B8	C304	1:F8	3-C7	C610B	1:L5	6-G8	C761	1:G3	7-J4
C202	1:C1	2-C8	C305	1:F8	3-D7	C611A	1:M6	6-H8	C762	1:G3	7-J4
C204	1:B3	2-E8	C306	1:F8	3-E6	C611B	1:M5	6-J8	C764	1:H3	7-H2
C205	1:A3	2-E8	C307	1:F8	3-E7	C615	1:M6	6-R8	C765	1:G3	7-J2
C207	1:C7	2-B6	C308	1:F8	3-G8	C616	1:M6	6-R8	C767	1:H3	7-K3
C209	1:C6	2-D6	C309	1:E8	3-A7	C623	1:N6	6-N8	C769	1:H4	7-M4
C210	1:C7	2-K0	C310	1:F5	3-B4	C625	1:M6	6-Q8	C770	1:H4	7-N4
C211	1:B7	2-F8	C311	1:F4	3-C1	C626	1:M6	6-Q8	C772	1:G4	7-M2
C213	1:B6	2-G8	C312	1:F5	3-D3	C628	1:M6	6-R8	C774	1:H4	7-P2
C215	1:B6	2-G8	C313	1:F4	3-D1	C630	1:N5	6-K5	C776	1:H4	7-N1
C217	1:C6	2-H8	C314	1:F4	3-E4	C631A	1:N5	6-M6	C782	1:G2	7-N1
C219	1:C6	2-H7	#C315	1:F4	3-E3	C634	1:M5	6-M5	C784	1:G2	7-R1
C221	1:D5	2-G6	#C316	1:E4	3-F3	C636	1:M5	6-M5	C786	1:G2	7-R1
C223	1:C5	2-J6	C317	1:F7	3-H5	C638	1:M5	6-P6	C788	1:G3	7-P0
C225	1:C3	2-K7	C318	1:F7	3-H5	C640	1:M5	6-R6	C790	1:G3	7-R0
C227	1:B4	2-K7	C319	1:F5	3-H4	C655	1:M4	6-C1	C792	1:G4	7-R0
C229	1:B3	2-L7	C320	1:E5	3-J4	C660	1:L5	6-K1	C810	1:L3	8-K8
C230	1:B4	2-J0	#C321	1:E5	3-H4	C665	1:L5	6-K1	C812	1:L2	8-F5
C232	1:A4	2-M7	#C322	1:E6	3-J3	C670	1:L5	6-L1	C813	1:K2	8-J5
C233	1:B5	2-N7	#C323	1:E6	3-L3	C673	1:L5	6-P2	C822	1:M2	8-B2
C235	1:B5	2-K5	C324	1:F7	3-M5	C677	1:L6	6-P1	C823	1:M3	8-C2
C237	1:C4	2-K5	C325	1:F7	3-N5	C681	1:L6	6-R3	C824	1:M2	8-C1
C239	1:C4	2-L4	#C326	1:E8	3-M4	C684	1:L6	6-R3	C826	1:N3	8-C0
C241	1:B4	2-M6	#C327	1:E8	3-M3	C687	1:L6	6-Q1	C827	1:N3	8-D0
C242	1:B4	2-L6	C328	1:E4	3-G1	C690	1:L6	6-R1	C828	1:N3	8-E0
C243	1:B4	2-P6	C329	1:E4	3-H2	C693	1:L6	6-R1	C830	1:N3	8-R1
C245	1:C5	2-A4	C330	1:E3	3-J2	C700	1:K4	7-A8	C838	1:N4	8-F0
C247	1:C6	2-B4	C331	1:E3	3-K2	C703	1:J3	7-B7	C841	1:N2	8-L2
C249	1:D4	2-C4	C332	1:E4	3-L2	C706	1:J2	7-B5	C844	1:M2	8-L2
C251	1:C3	2-E4	C333	1:E3	3-J0	%C707	1:K4	7-C8	C910	1:P8	9-E6
C253	1:D3	2-E3	C334	1:F8	3-C7	C708	1:J2	7-C9	C920	1:P7	9-G6
C255	1:D3	2-D2	#C335	1:E4	3-E3	C709	1:K4	7-D9	C930	1:P6	9-H6
C257	1:D3	2-F2	C336	1:F3	3-H0	C710	1:J3	7-D8			
C259	1:C6	2-J2	C337	1:E3	3-K2	C711	1:J3	7-C5	D111	1:P4	1-R1
C260	1:D8	2-H0	C340	1:E9	3-P2	C712	1:H2	7-E7	D111A	1:P5	1-Q1
C261	1:C6	2-K2	C341	1:E8	3-P1	%C713	1:H2	7-E6	%D205	1:B2	2-D9
C263	1:D6	2-L3	C342	1:E8	3-R3	C714	1:J3	7-E8	%D210	1:B2	2-D9
C265	1:D6	2-N4	#C345	1:E6	3-J4	C719	1:J3	7-F8	D220	1:B4	2-P6
C267	1:C8	2-P3	C350	1:E9	3-N2	C720	1:J3	7-F8	D220	1:B4	2-P7
&C269	1:C8	2-P3	C351	1:E9	3-N2	C722	1:J4	7-G8	D230	1:B7	2-R5
&C271	1:C8	2-Q3	C354	1:E3	3-R0	C724	1:J4	7-H6	D240	1:D4	2-C4
C273	1:C8	2-Q4	C360	1:E4	3-R8	C725	1:J4	7-J6	D240	1:D4	2-B2
C275	1:C3	2-E1	C503	1:K6	5-L9	C726	1:K4	7-J6	D250	1:D3	2-E2
C277	1:C4	2-G1	C505	1:K6	5-M6	C727	1:J3	7-J8	D250	1:D3	2-D3
C279	1:B4	2-G1	C510	1:J5	5-C0	C729	1:H3	7-M8	D260	1:C3	2-C2
C281	1:B5	2-J1	C513	1:H5	5-G2	%C733	1:H2	7-E3	D260	1:C3	2-C2
C283	1:B5	2-K0	C514	1:H5	5-G2	C735	1:J2	7-A1	D270	1:C2	2-C1
C285	1:D7	2-L0	C515	1:J5	5-F1	C736	1:J2	7-B1	D270	1:C2	2-C1
C287	1:C6	2-M1	C516	1:J5	5-H1	C740A	1:H2	7-B4	D301	1:F5	3-C3
&C289	1:C8	2-N1	C535	1:K5	5-M2	C740B	1:H2	7-B3	D302	1:F5	3-D4
C291	1:D7	2-P1	C536	1:K5	5-L2	C741A	1:H2	7-C4	D303	1:F4	3-D3
C293	1:D7	2-Q1	C537	1:K5	5-L2	C741B	1:G2	7-C3	D510	1:K6	5-K8
%C294	1:D7	2-Q0	C545	1:J5	5-K1	C742A	1:H2	7-D4	D510	1:K6	5-K8
%C295	1:C7	2-Q0	C546	1:K5	5-K0	C742B	1:H3	7-D3	D610	1:N6	6-L6
C300A	1:F9	3-J8	C550	1:K4	5-L0	C743	1:H2	7-B1	D610	1:N6	6-K6
C300B	1:F8	3-K8	C600	1:L6	6-D8	C745	1:G3	7-D1	D620	1:N4	6-B1
C301	1:E9	3-B8	C601	1:L6	6-D8	C750	1:H4	7-Q7	D620	1:N4	6-B2
C302	1:E8	3-B8	C605	1:L6	6-C8	C757	1:G4	7-F5	D630	1:M5	6-G2
C303	1:E9	3-C8	C610A	1:M5	6-F8	C759	1:G4	7-G4	D630	1:M5	6-G3

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
D635	1:M4	6-G3	L305	1:F4	3-E3	Q230	1:A4	2-M8	R229	1:B4	2-M7
D635A	1:M5	6-H3	L306	1:F4	3-E4	Q240	1:B7	2-Q7	R230	1:B4	2-M6
D640	1:L5	6-M2	L307	1:F4	3-F4	Q250	1:B7	2-R6	R231	1:B4	2-M6
D640	1:L5	6-M1	#L307	1:F5	3-G4	Q260	1:C4	2-F3	R232	1:B4	2-M5
D645	1:M5	6-R6	L308	1:E6	3-K4	Q270	1:D2	2-D1	R233	1:B4	2-M6
D710	1:J3	7-L8	L309	1:E6	3-K3	Q301	1:E8	3-B7	R235	1:B4	2-P6
D710	1:J3	7-L8	L310	1:E6	3-L4	Q302	1:F8	3-F7	R237	1:B7	2-Q7
D720	1:H3	7-P8	L312	1:E7	3-M4	Q304	1:E5	3-G4	R238	1:B7	2-R7
D720	1:H3	7-P8	#L313	1:E7	3-M4	Q305	2:E6	3-L4	R239	1:B8	2-R6
D730	1:H3	7-H1	L314	1:E8	3-R4	Q306	1:E4	3-G1	R241	1:B8	2-Q6
D730A	1:H3	7-F0	#L315	1:E5	3-H3	Q307	1:E3	3-H2	R242	1:B7	2-Q5
D740	1:H3	7-J2	L350	1:E9	3-N2	Q308	1:E3	3-J2	R244	1:C6	2-A5
D740A	1:H3	7-F0	L535	1:K5	5-L2	Q309	1:E3	3-J0	R245	1:D4	2-D4
D810	1:M2	8-B7	L600	1:L6	6-D8	Q310	1:E9	3-Q1	R247	1:D3	2-E4
D810A	1:M2	8-B7	L615	1:M6	6-R8	Q311	1:E8	3-Q2	R248	1:C3	2-E3
			L750	1:G3	7-Q0	Q315	1:F8	3-G8	R249	1:D4	2-F3
IC210	1:C7	2-J0	L910	1:P7	9-F7	Q505	1:K5	5-J8	R251	1:C4	2-G4
IC210	1:C7	2-Q0	L920	1:P7	9-H7	Q510	1:J5	5-D1	R253	1:C6	2-J2
IC210	1:C7	2-K2				Q520	1:J5	5-H2	R254	1:C7	2-K3
IC210	1:C7	2-L1	LINK1	2:B2	2-E9	Q530	1:J5	5-H0	R255	1:C7	2-K2
IC210	1:C7	2-C6	LINK2	2:A2	2-E8	Q540	1:K5	5-L2	R256	1:D8	2-M3
IC220	1:C6	2-P0	LK302	1:E3	3-J0	Q550	1:K5	5-L0	R257	1:D8	2-N5
IC220	1:C6	2-M3				Q610	1:L6	6-D8	R258	1:D8	2-N4
IC220	1:C6	2-D5	P100	1:P6	1-R8	Q620	1:N6	6-P8	R259	1:D6	2-P4
IC230	1:B4	2-J0	P150	1:P2	1-Q4	Q630	1:M6	6-P5	R260	1:D8	2-N4
IC230	1:B4	2-J0	P160	1:P2	1-Q4	Q660	1:L5	6-N1	R262	1:D8	2-N3
IC230	1:B4	2-L5	P170	1:P2	1-Q3	Q670	1:M6	6-Q2	R263	1:C8	2-P3
IC230	1:B4	2-N6	P204	1:D1	2-A8	Q710	1:J3	7-K8	&R264	1:C8	2-P3
IC230	1:B4	2-G1	P208	1:D1	2-A8	Q720	1:J3	7-K8	&R265	1:C8	2-P3
IC240	1:D4	2-F3	P210	1:D3	2-A3	Q730	1:H3	7-N8	&R266	1:C8	2-P3
IC250	1:D3	2-E1	P215	1:D4	2-A2	Q740	1:H3	7-N8	R267	1:C8	2-R2
IC260	1:D8	2-N0	P217	1:D4	2-A2	Q750	1:G4	7-F3	R268	1:D2	2-C0
IC260	1:D8	2-H0	P219	1:D2	2-A1	Q760	1:H3	7-H3	R269	1:D3	2-C1
IC260	1:D8	2-Q2	P225	1:D2	2-A0	Q770	1:H3	7-H1	R270	1:D3	2-D1
IC260	1:D8	2-Q3	P230	1:C5	2-B0	Q775	1:H3	7-K3	R271	1:C3	2-E1
IC260	1:D8	2-N3	P231	1:D8	2-B0	Q780	1:H3	7-K3	R272	1:C4	2-F2
IC300	1:F8	3-A0	P233	1:C1	2-R9	Q785	1:H3	7-K2	R273	1:B5	2-G2
IC300	1:F8	3-J8	P235	1:C1	2-R9	Q790	1:H3	7-L3	R274	1:C4	2-G1
IC300	1:F8	3-D7	P237	1:B7	2-R8	Q795	1:G3	7-P0	R275	1:C4	2-H0
IC610	1:L5	6-G8	P239	1:C7	2-R8	Q810	1:M2	8-E7	R277	1:B5	2-J1
IC630	1:N5	6-K5	P240	1:C7	2-R8	Q820	1:L2	8-D5	R278	1:B5	2-J0
IC640	1:M5	6-N5	P243	1:B7	2-R7	Q830	1:L2	8-D5	R279	1:B5	2-K0
IC640	1:M5	6-R6	P244	1:B7	2-R7	Q840	1:L2	8-F5	R280	1:B5	2-K0
IC640	1:M5	6-F1	P245	1:B8	2-R6	Q850	1:M2	8-G5	R282	1:D7	2-K1
IC650	1:L5	6-F4	P247	1:B8	2-R6	Q860	1:L4	8-B3	R283	1:D7	2-L1
=IC700	1:K3	7-A8	P248	1:B7	2-R6				R284	1:D7	2-L0
IC710	1:J2	7-D8	P249	1:C7	2-R5	%R150	1:P2	1-R4	R285	1:C8	2-M0
IC710	1:J2	7-C6	P251	1:C7	2-R5	R160	1:P2	1-R3	R286	1:C7	2-M0
IC710	1:J2	7-C5	P255	1:D4	2-R4	%R200	1:B2	2-C9	R287	1:D9	2-M0
IC710	1:J2	7-D6	P257	1:C2	2-R4	R201	1:B3	2-E9	R288	1:C6	2-M2
IC710	1:J2	7-D7	P259	1:B8	2-R3	R202	1:C1	2-F9	R289	1:D9	2-M0
IC710	1:J2	7-D6	P261	1:B8	2-R3	%R203	1:B3	2-C8	&R290	1:C8	2-N2
IC710	1:J2	7-C6	P263	1:B1	2-R2	R204	1:C7	2-B6	R291	1:C8	2-N1
IC720	1:J3	7-P6	P267	1:C8	2-N2	R205	1:C7	2-D6	R292	1:D8	2-Q2
IC720	1:J3	7-G0	P269	1:D8	2-P2	R206	1:B7	2-G8	R293	1:D9	2-Q2
IC720	1:J3	7-N7	P271	1:C9	2-N1	R207	1:B6	2-G8	R294	1:D9	2-Q1
IC720	1:J3	7-M7	P273	1:D9	2-P0	R208	1:B6	2-G8	R295	1:D8	2-R1
IC720	1:J3	7-K7	P275	1:D7	2-Q0	R209	1:C6	2-H8	R296	1:D7	2-P0
IC720	1:J3	7-E8	P290	1:D5	2-E0	R210	1:B6	2-H7	R297	1:D7	2-P1
IC720	1:J3	7-G0	P291	1:D5	2-G0	R211	1:B2	2-D9	%R298	1:D7	2-Q0
IC730	1:J4	7-H8	P805	1:M2	8-A7	R212	1:D4	2-F6	R299	1:C7	2-R0
IC730	1:J4	7-G7	P810	1:L3	8-A5	R213	1:C4	2-G6	R300	1:F8	3-J8
IC740	1:H2	7-D1	P820	1:L4	8-M8	R214	1:D4	2-G6	R301	1:E8	3-B8
IC750	1:H4	7-M3	P825	1:L4	8-M8	R215	1:C4	2-H6	R302	1:E8	3-A7
IC750	1:H4	7-H5	P830	1:L4	8-M8	R216	1:C3	2-K7	R303	1:E8	3-B7
IC750	1:H4	7-Q7	P835	1:L4	8-M7	R217	1:A4	2-M8	R304	1:F8	3-B8
IC820	1:L4	8-N2	P840	1:L4	8-M7	R218	1:A5	2-N7	R305	1:F8	3-C7
IC830	1:N3	8-J0				R219	1:B4	2-N8	#R306	1:F8	3-D5
IC830	1:N3	8-Q1	PL100	1:P3	1-F0	R220	1:B2	2-E9	#R307	1:F8	3-D5
IC830	1:N3	8-J0	PL205	1:C5	2-J8	R221	1:B7	2-R7	R308	1:F8	3-E7
IC830	1:N3	8-C0	PL210	1:C3	2-H4	R223	1:B4	2-K6	R309	1:F8	3-D5
IC830	1:N3	8-J1	PL215	1:C4	2-K3	R224	1:C4	2-K5	R310	1:F8	3-E6
			PL220	1:C4	2-H2	R225	1:B4	2-L5	R311	1:F8	3-F6
L300	1:F5	3-G5				R226	1:B4	2-L4	R312	1:F8	3-F8
L302	1:F5	3-C3	Q210	1:C6	2-J8	R227	1:B4	2-M4	R313	1:F8	3-F8
L303	1:F7	3-M5	Q220	1:B3	2-L7	R228	1:A2	2-E9	R314	1:F8	3-G6

Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit	Device	PCB	Circuit
R315	1:F5	3-G5	R665	1:M5	6-E2	R811	1:L2	8-E6	SK805	1:K3	8-Q8
R322	1:F4	3-C1	R669	1:M5	6-E2	R812	1:L2	8-D5	SK805	1:K3	8-Q6
R323	1:F5	3-C3	R673	1:M5	6-E0	R813	1:L2	8-D4	SK805	1:K3	8-Q8
R324	1:F4	3-C2	R677	1:M4	6-F4	R815	1:L2	8-F4	SK805	1:K3	8-Q6
R325	1:F4	3-D2	R681	1:L5	6-L2	R816	1:L2	8-F4	SK805	1:K3	8-Q9
R326	1:E4	3-G3	R685	1:L5	6-N2	R818	1:M2	8-F5	SK805	1:K3	8-Q6
R327	1:E4	3-F3	R689	1:L6	6-Q3	R819	1:M2	8-F5	SK805	1:K3	8-Q9
R328	1:F5	3-G4	R693	1:L5	6-Q1	R821	1:M4	8-B3	SK805	1:K3	8-Q7
R329	1:F7	3-H5	R696	1:L6	6-Q1	R822	1:M4	8-E3	SK805	1:K3	8-Q8
#R330	1:E5	3-J3	R701	1:K4	7-A9	R824	1:L4	8-L8	SK805	1:K3	8-Q6
#R331	1:E5	3-J4	R702	1:K4	7-C9	R825	1:L4	8-L8	SK810	1:M3	8-H5
#R332	1:E6	3-J3	R703	1:J3	7-C8	R826	1:L4	8-L8			
R333	1:E6	3-K3	R704	1:J3	7-C5	R827	1:L4	8-L7	SL201	2:D1	2-B9
R334	1:E7	3-L4	=R705	1:K3	7-A7	R828	1:L4	8-L7	SL202	2:D1	2-B8
R335	1:F7	3-M5	R706	1:H3	7-C5	R829	1:L4	8-P9	SL203	2:D2	2-B1
R336	1:E5	3-G3	R708	1:J3	7-B5	R830	1:L3	8-P9	SL204	2:D2	2-B1
R337	1:E5	3-H3	R710	1:H2	7-E7	R831	1:L3	8-P9	SL501	2:J5	5-F0
R338	1:E5	3-H3	R711	1:J2	7-B6	R832	1:L3	8-P8	SL810	1:M2	8-C7
R339	1:E5	3-H3	R712	1:J2	7-D8	R833	1:L3	8-P8			
R340	1:E4	3-G1	R713	1:J4	7-F8	R835	1:L3	8-P8	SW230	1:B8	2-A3
R341	1:E4	3-H1	R714	1:J3	7-D9	R836	1:L3	8-P8			
R342	1:E3	3-J2	%R715	1:K4	7-H6	R837	1:L3	8-P7	T210	1:B2	2-C8
R343	1:E3	3-J1	R717	1:J4	7-H7	R840	1:L3	8-P7	T610	1:L6	6-N2
R344	1:E3	3-K2	R718	1:J4	7-H7	R841	1:L3	8-P7			
R345	1:E4	3-K2	R719	1:J4	7-J6	R842	1:L3	8-P6	TP206	1:C5	2-H7
R346	1:E3	3-H0	R720	1:J3	7-K7	R843	1:L3	8-P6	TP305	1:E9	3-M2
R347	1:E3	3-J1	R721	1:J3	7-K9	R845	1:M4	8-Q5	TP601	1:N6	6-K9
R348	1:D3	3-J0	R722	1:J3	7-K8	R847	1:L2	8-Q4	TP602	1:M6	6-R9
R349	1:E3	3-J0	R723	1:H3	7-M7	R848	1:L2	8-J4	TP603	1:L5	6-J2
R350	1:E4	3-L3	R725	1:J4	7-N7	R849	1:L2	8-Q4	TP604	1:L4	6-M6
R355	1:E8	3-P2	%R726	1:J3	7-N6	R850	1:K2	8-Q4	TP607	1:L5	6-J9
R356	1:E9	3-P2	R727	1:H3	7-N9	R853	1:M4	8-N3	TP710	1:G4	7-H5
R357	1:E8	3-P1	R728	1:H3	7-N8	R854	1:M4	8-N3	TP715	1:J2	7-C6
R358	1:E8	3-Q1	R734	1:K2	7-A2	R855	1:M2	8-B0			
R359	1:E8	3-R3	R735	1:K2	7-A2	R859	1:N2	8-C1			
R501	1:K5	5-H8	R736	1:K2	7-A2	R861	1:N2	8-D1			
R502	1:K5	5-J8	R742	1:H2	7-B4	R863	1:N3	8-E1			
R503	1:K5	5-J8	R743	1:H2	7-C5	R865	1:N4	8-E0			
R504	1:K6	5-K9	R744	1:G2	7-D4	R867	1:N3	8-E1			
R505	1:K6	5-L8	R746	1:H3	7-E4	R871	1:N3	8-G2			
R510	1:K6	5-L7	R747	1:H3	7-E5	R872	1:M4	8-H1			
R514	1:K6	5-M5	R748	1:J2	7-A1	R873	1:N3	8-G1			
R515	1:H6	5-J5	R749	1:J2	7-B1	R874	1:N3	8-H0			
R517	1:G5	5-E2	R750	1:H4	7-Q7	R875	1:N3	8-G0			
R518	1:G5	5-F2	R752	1:G4	7-F5	R876	1:N3	8-H0			
R519	1:G5	5-F2	R753	1:G4	7-F3	R877	1:M2	8-K2			
R520	1:J5	5-C1	R754	1:G3	7-F3	R879	1:N2	8-L3			
R525	1:J5	5-D1	R756	1:G3	7-G5						
R530	1:J5	5-D0	R757	1:G4	7-G4	RV210	1:B7	2-F9			
R535	1:J5	5-E1	R758	1:H3	7-H4	RV220	1:A4	2-M6			
R540	1:J5	5-H2	R759	1:H3	7-H4	%RV300	1:E8	3-C5			
R545	1:J5	5-J1	R760	1:H3	7-K4	RV805	1:N4	8-F1			
%R550	1:J5	5-J2	R762	1:H3	7-K4						
%R553	1:K5	5-J1	R763	1:H3	7-L4	SK200	1:D5	2-F0			
R555	1:K5	5-K1	R765	1:H3	7-H2	SK205	1:B5	2-A5			
R560	1:K5	5-M0	R766	1:G3	7-J3	SK310	1:E8	3-N4			
R609	1:L6	6-B8	R767	1:H3	7-K2	SK410	1:M8	1-M8			
R613	1:L6	6-C8	R769	1:H3	7-K3	SK501	1:G6	5-D6			
R615	1:M5	6-F9	R771	1:H4	7-L3	SK502	1:G6	5-D5			
R617	1:M5	6-J8	R772	1:G4	7-M2	SK503	1:G6	5-D4			
R619	1:N6	6-L8	R774	1:H4	7-M3	SK504	1:G5	5-D3			
R621	1:N6	6-L8	R775	1:H4	7-N2	SK505	1:G5	5-D2			
R625	1:N6	6-L7	R777	1:H4	7-R2	SK513	1:H5	5-H3			
R629	1:N6	6-P6	R780	1:G2	7-P1	SK522	1:H6	5-K5			
R633	1:M5	6-Q8	R782	1:G3	7-P1	SK531	1:K6	5-N6			
R637	1:M5	6-K6	R784	1:G3	7-P1	SK532	1:K5	5-N5			
R638	1:M5	6-K6	R785	1:G3	7-Q1	SK533	1:K5	5-N4			
R640	1:M5	6-R6	R786	1:G2	7-R1	SK534	1:K5	5-N3			
R641	1:N5	6-L5	R787	1:G2	7-R2	SK535	1:K5	5-N2			
R645	1:N5	6-L5	R790	1:G3	7-P0	=SK710	1:K3	7-A7			
R649	1:M5	6-M5	R791	1:G3	7-Q0	SK805	1:K3	8-Q9			
R653	1:M5	6-Q5	R801	1:M2	8-D7	SK805	1:K3	8-Q7			
R655	1:L4	6-D4	R802	1:M2	8-D7	SK805	1:K3	8-Q5			
R656	1:L4	6-D4	R808	1:L2	8-B4	SK805	1:K3	8-Q7			
R657	1:M5	6-D1	R809	1:L2	8-D5	SK805	1:K3	8-Q8			
R661	1:M5	6-E3	R810	1:L3	8-D6	SK805	1:K3	8-Q7			

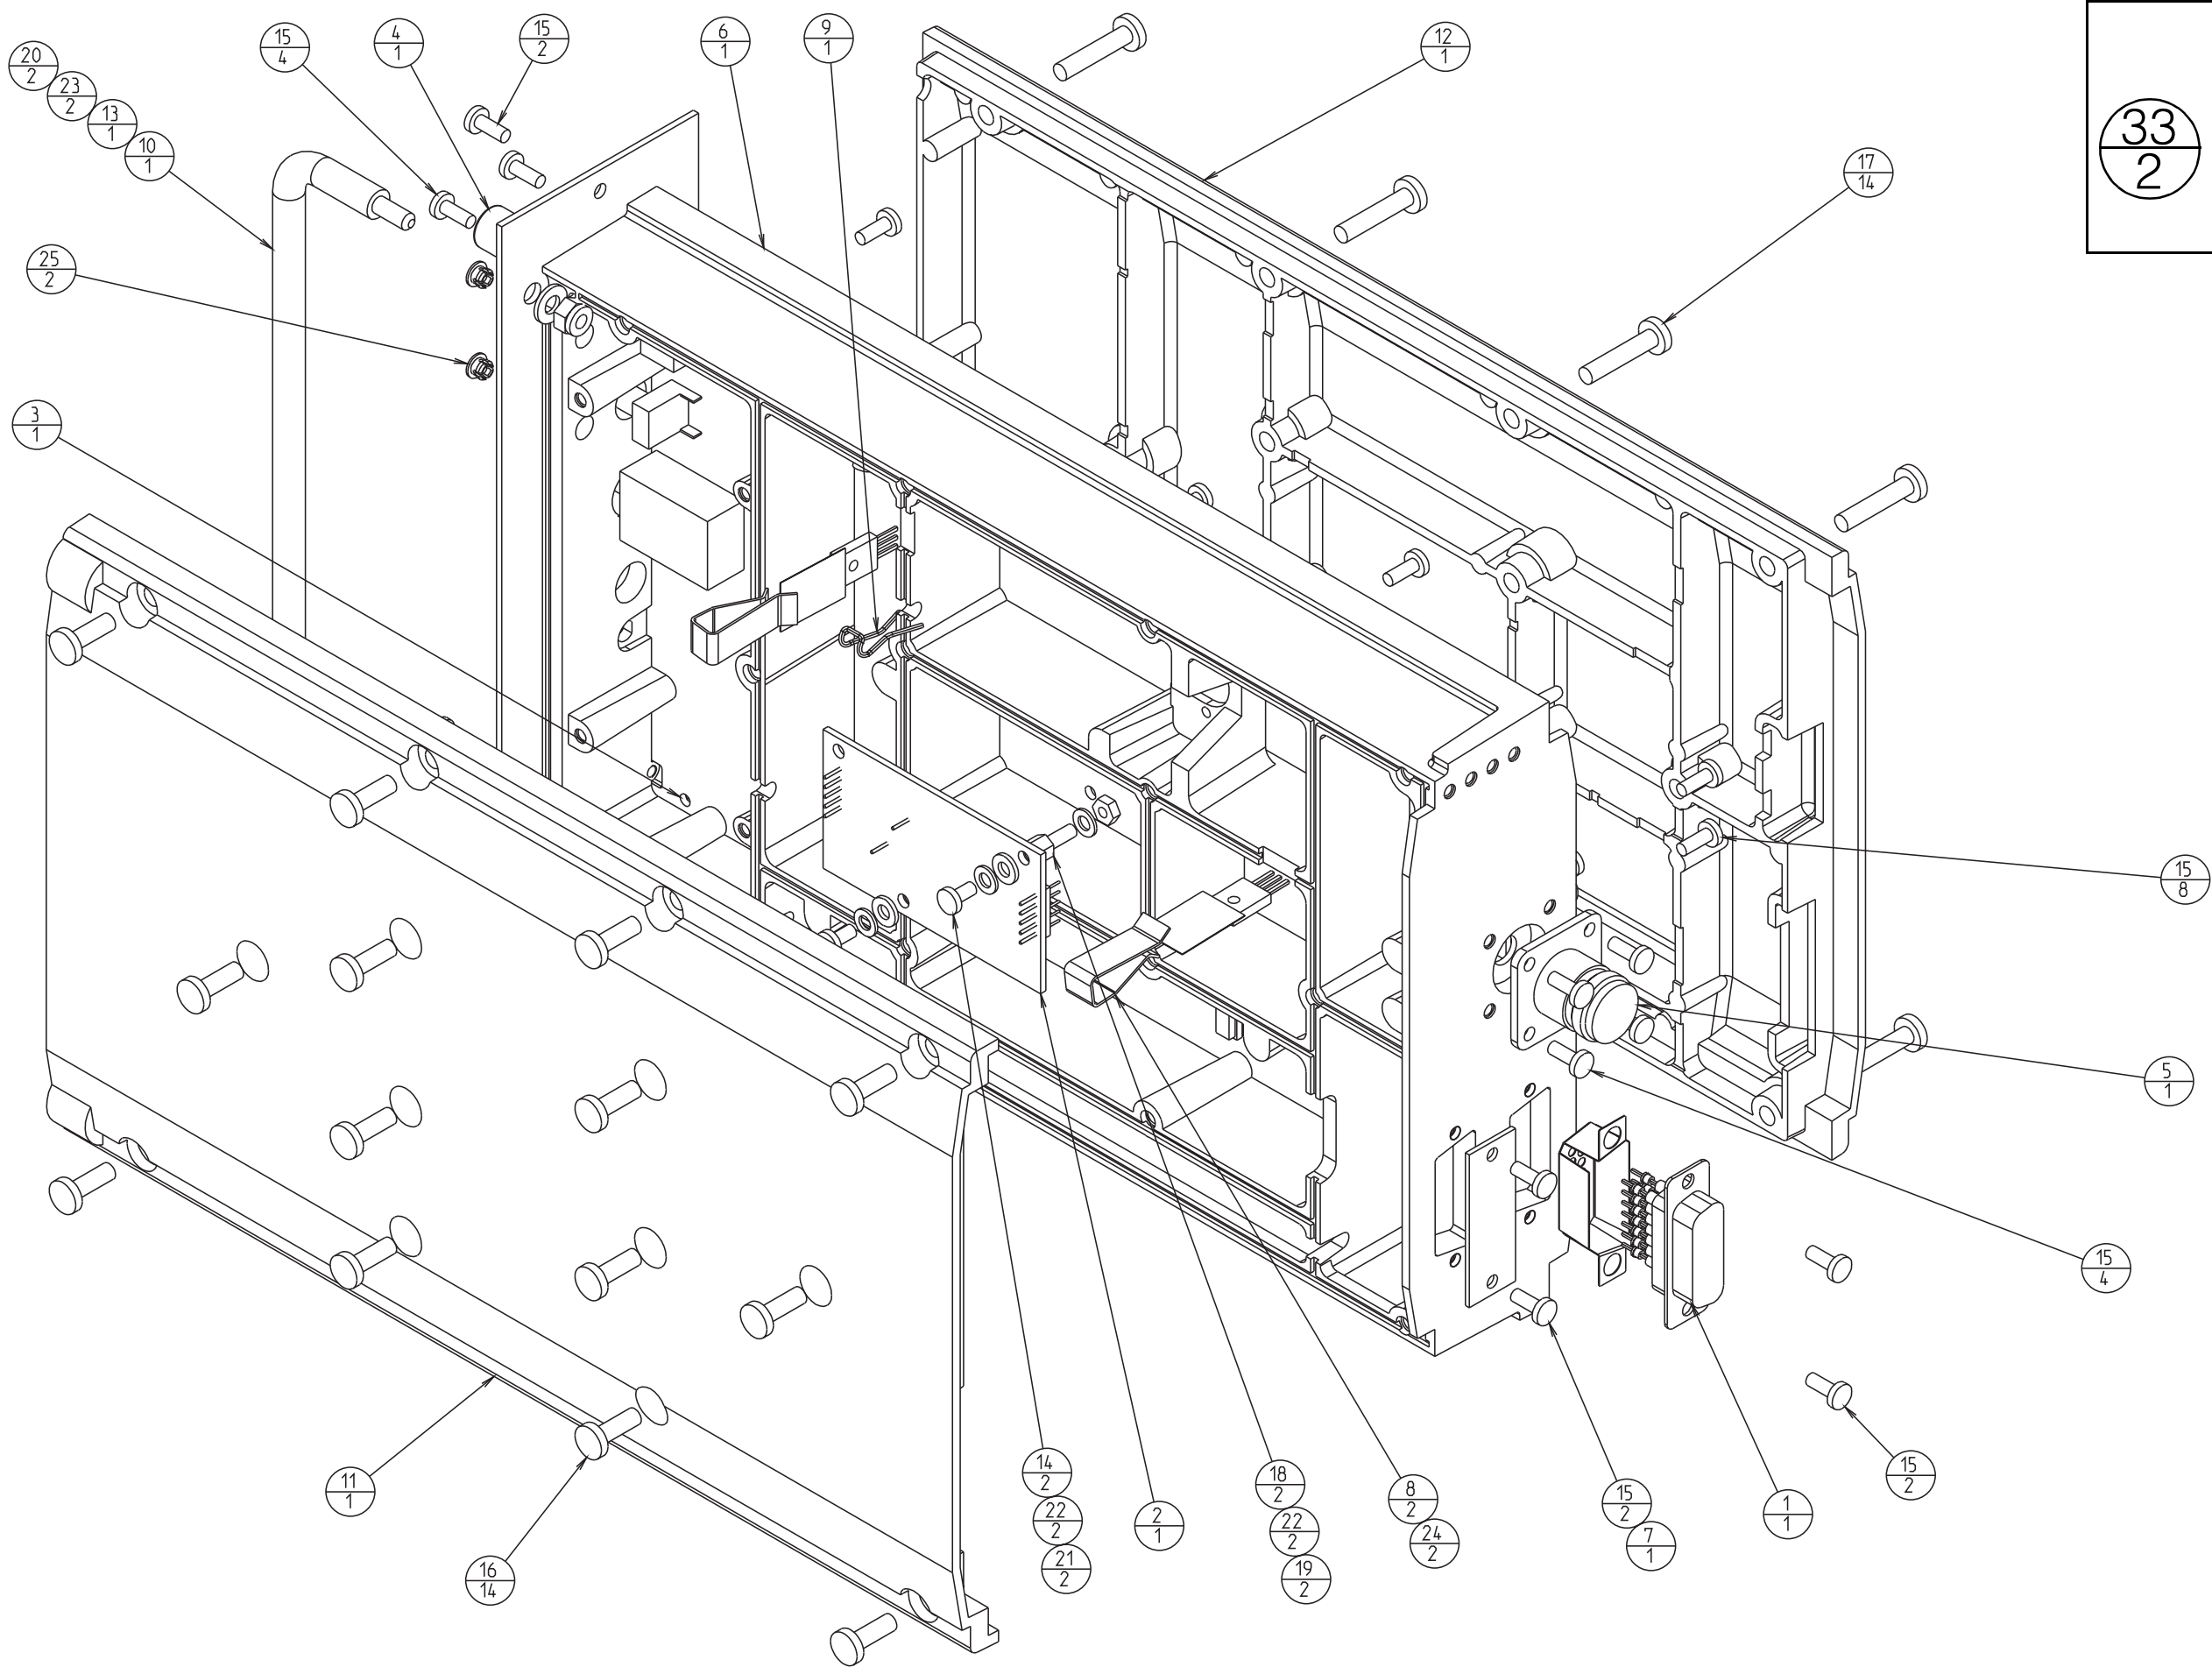


Key

33
2


The upper number is the component identification number which appears in the "Legend" column of the Mechanical & Miscellaneous Parts on the facing page.

The lower number indicates how many of this component are used in this location or function.




%R150 (10Ω) is fitted only when the T857 is used in a Series I rack frame (refer to Part I for full details).


T857 PCB Layout - Top Side
220-01398-04

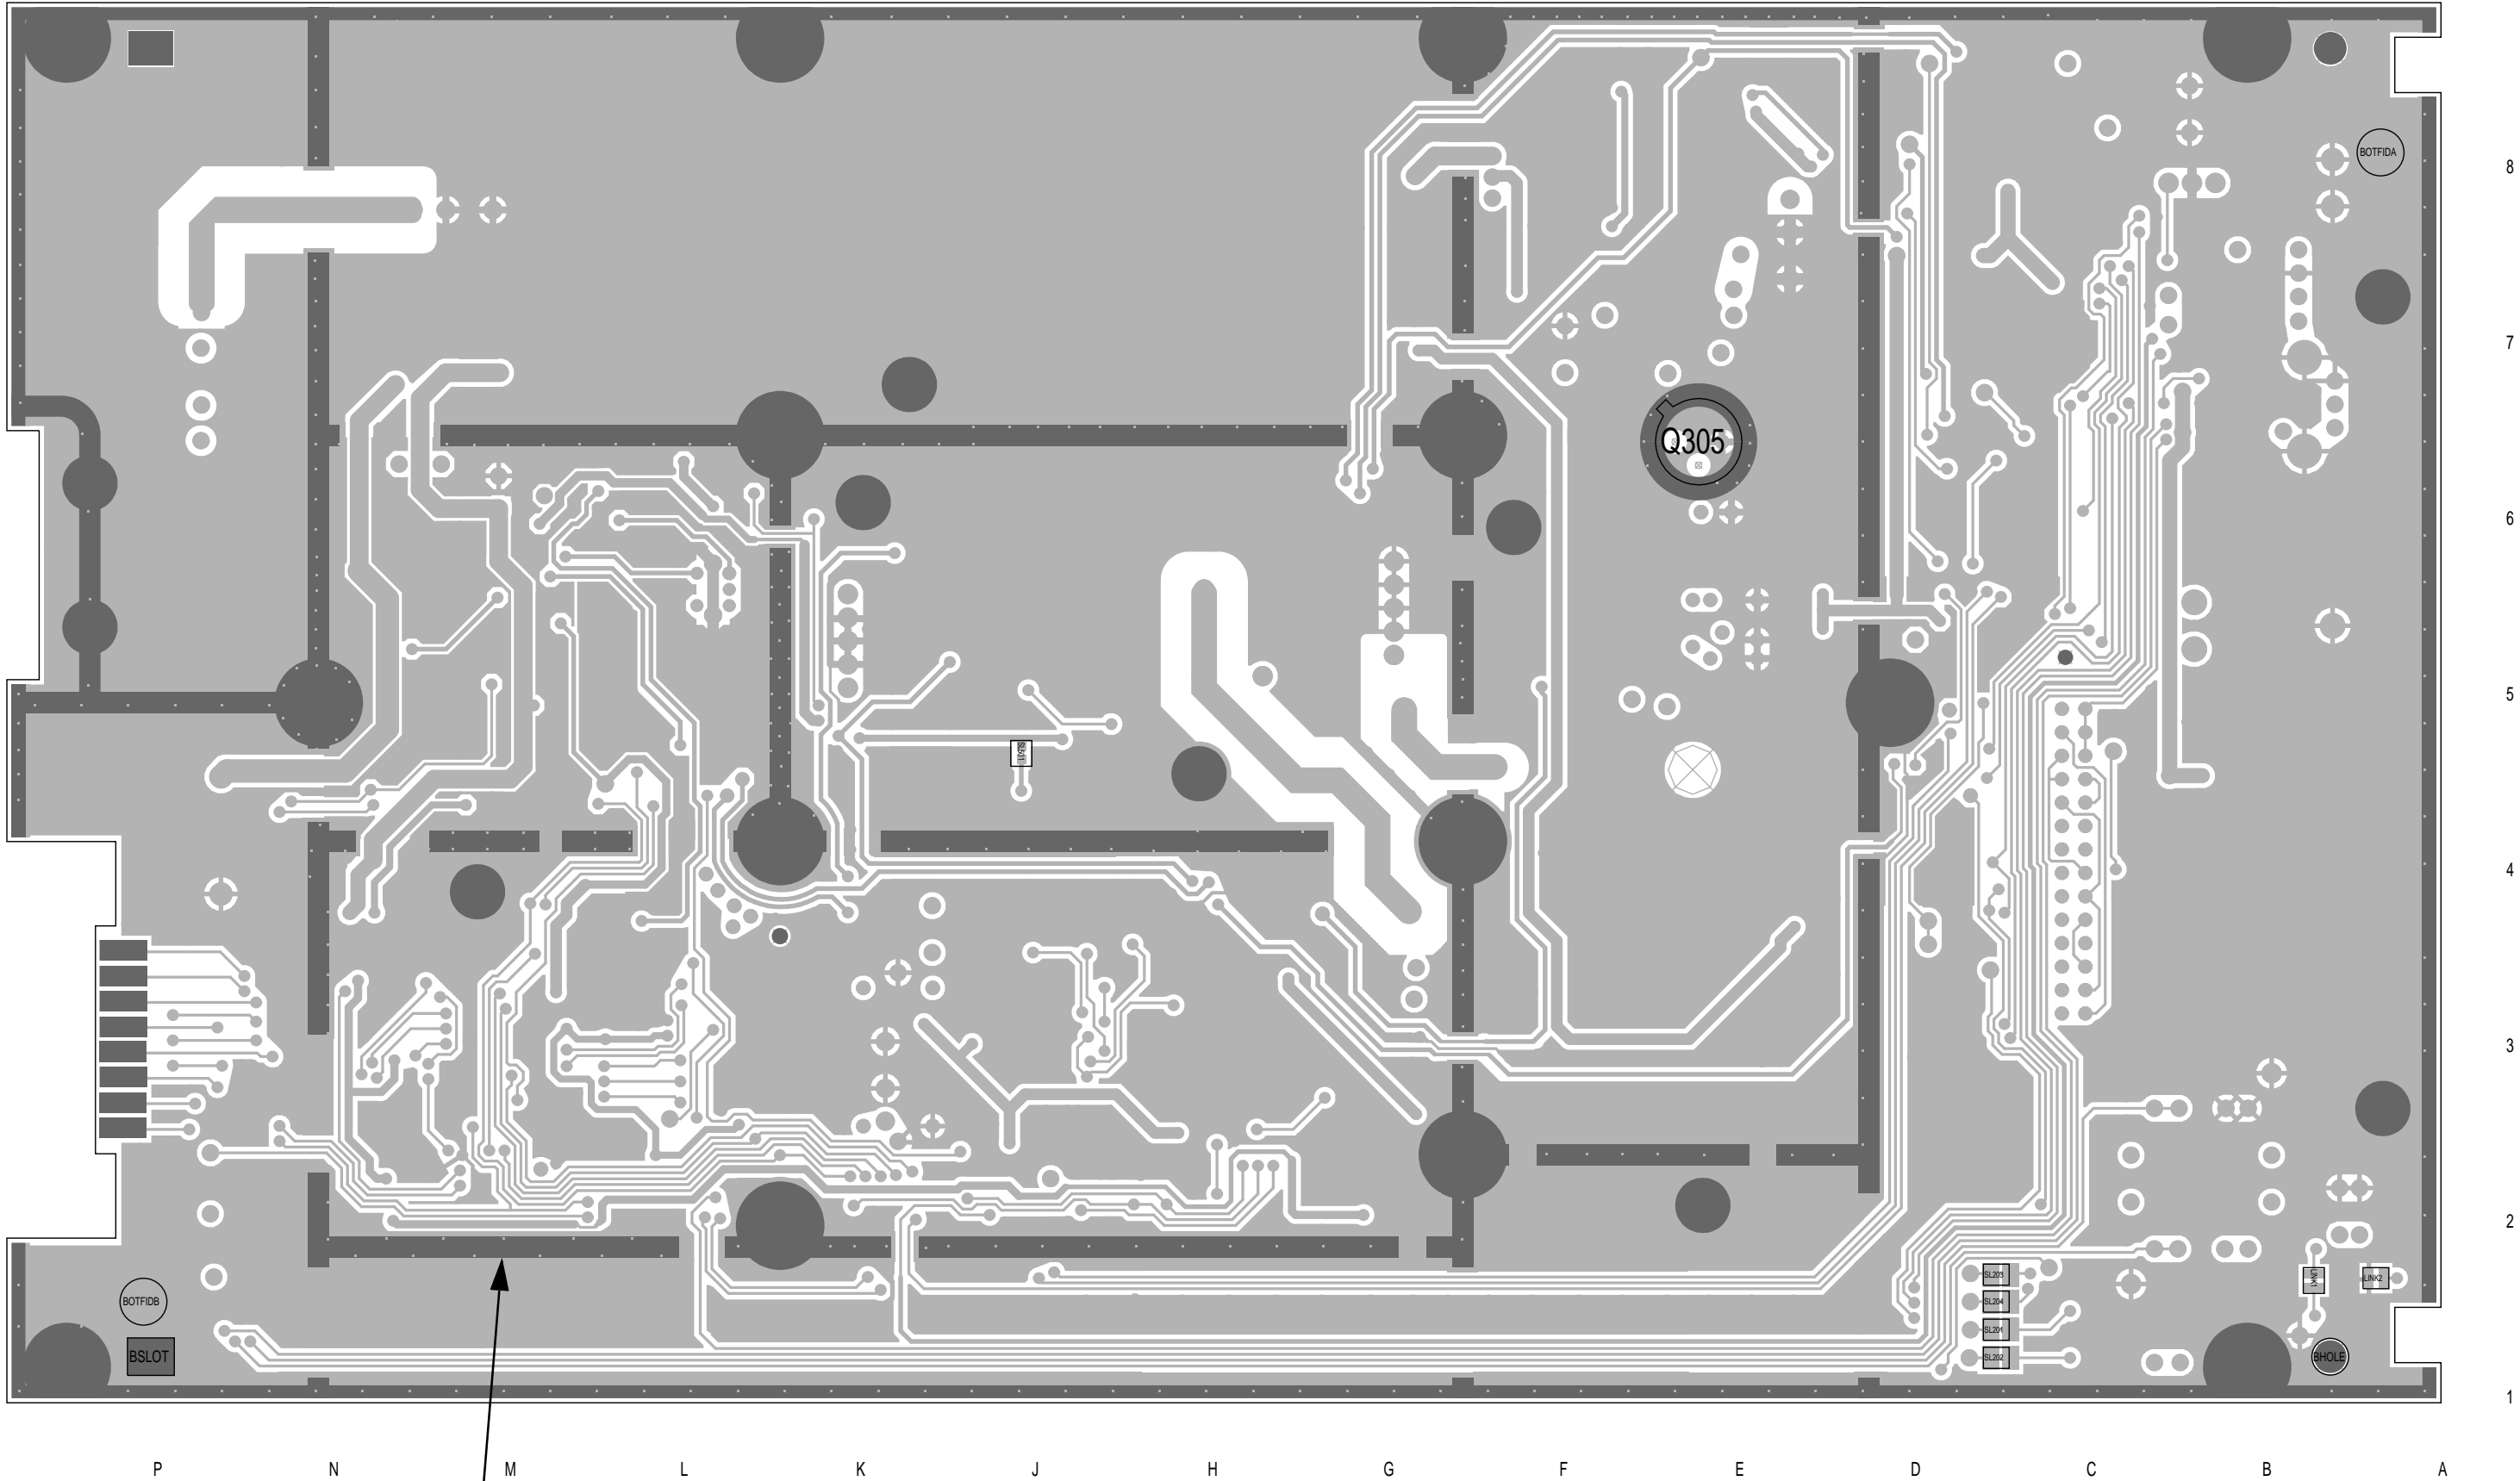

The darker shading shows the footprint of the bottom cover.

T857 PCB Layout - Bottom Side
220-01398-04




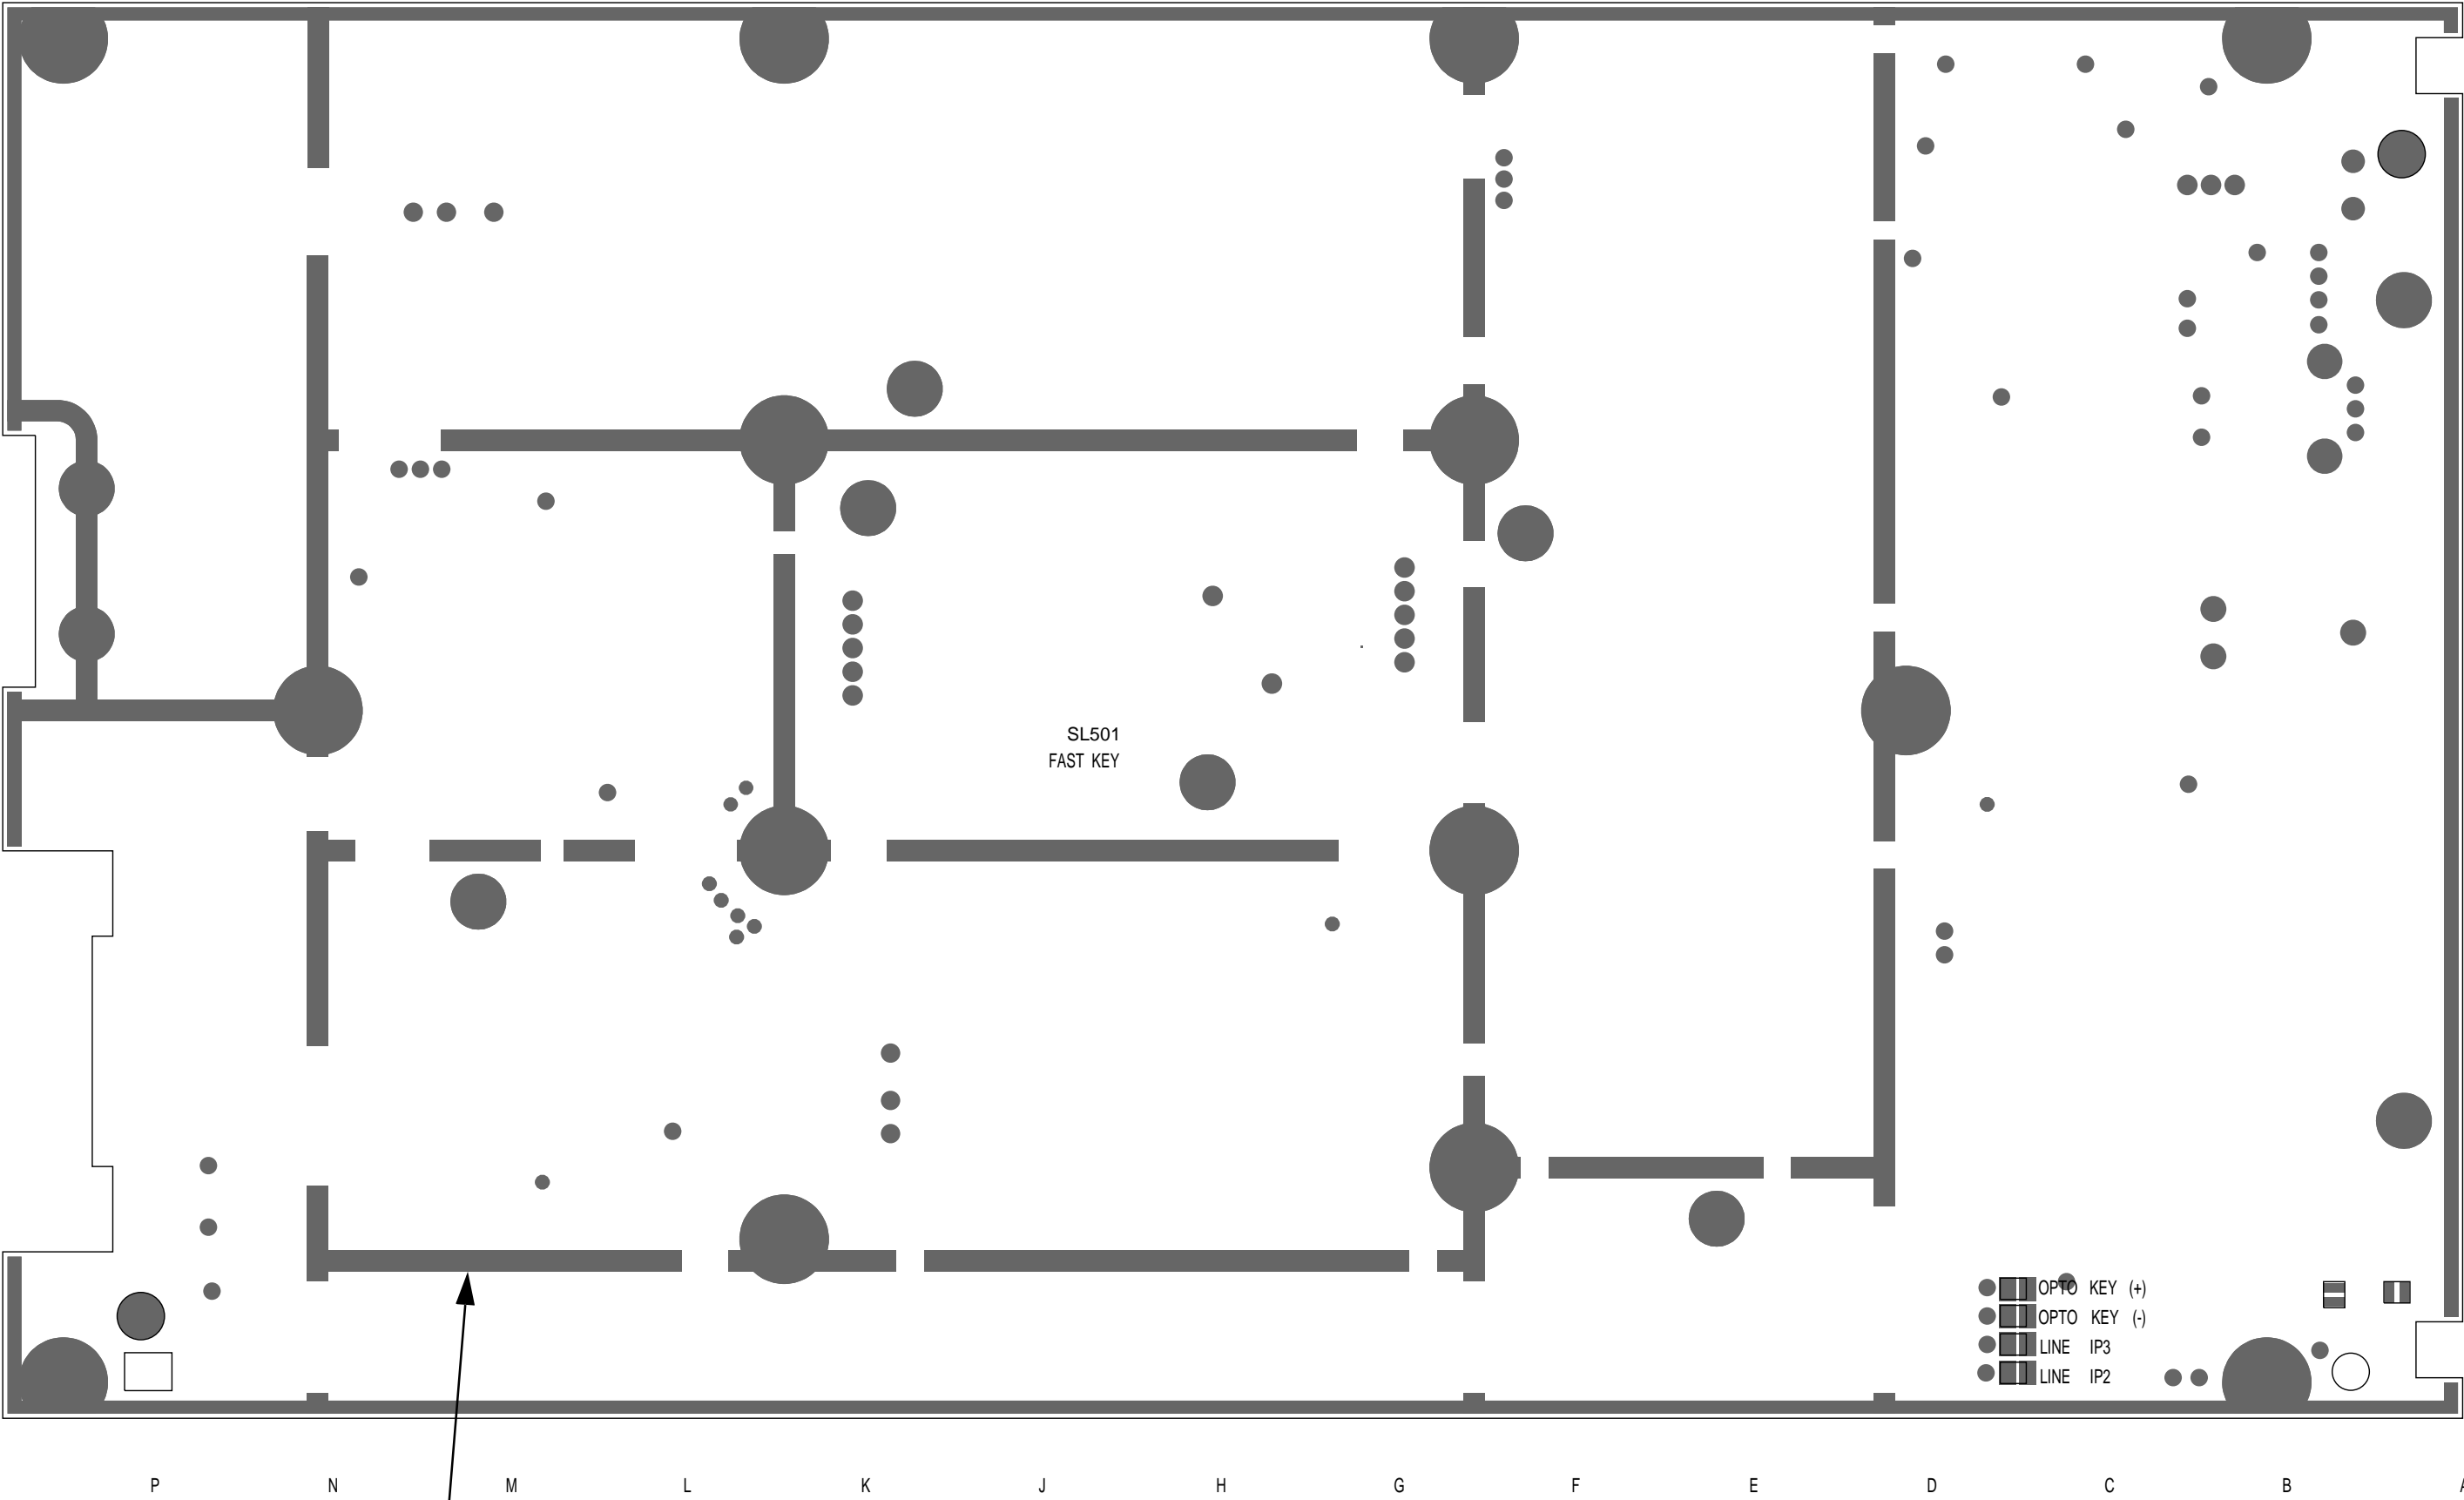


The darker shading shows the footprint of the bottom cover.


T857 Test Points & Options Connections - Bottom Side
220-01398-04




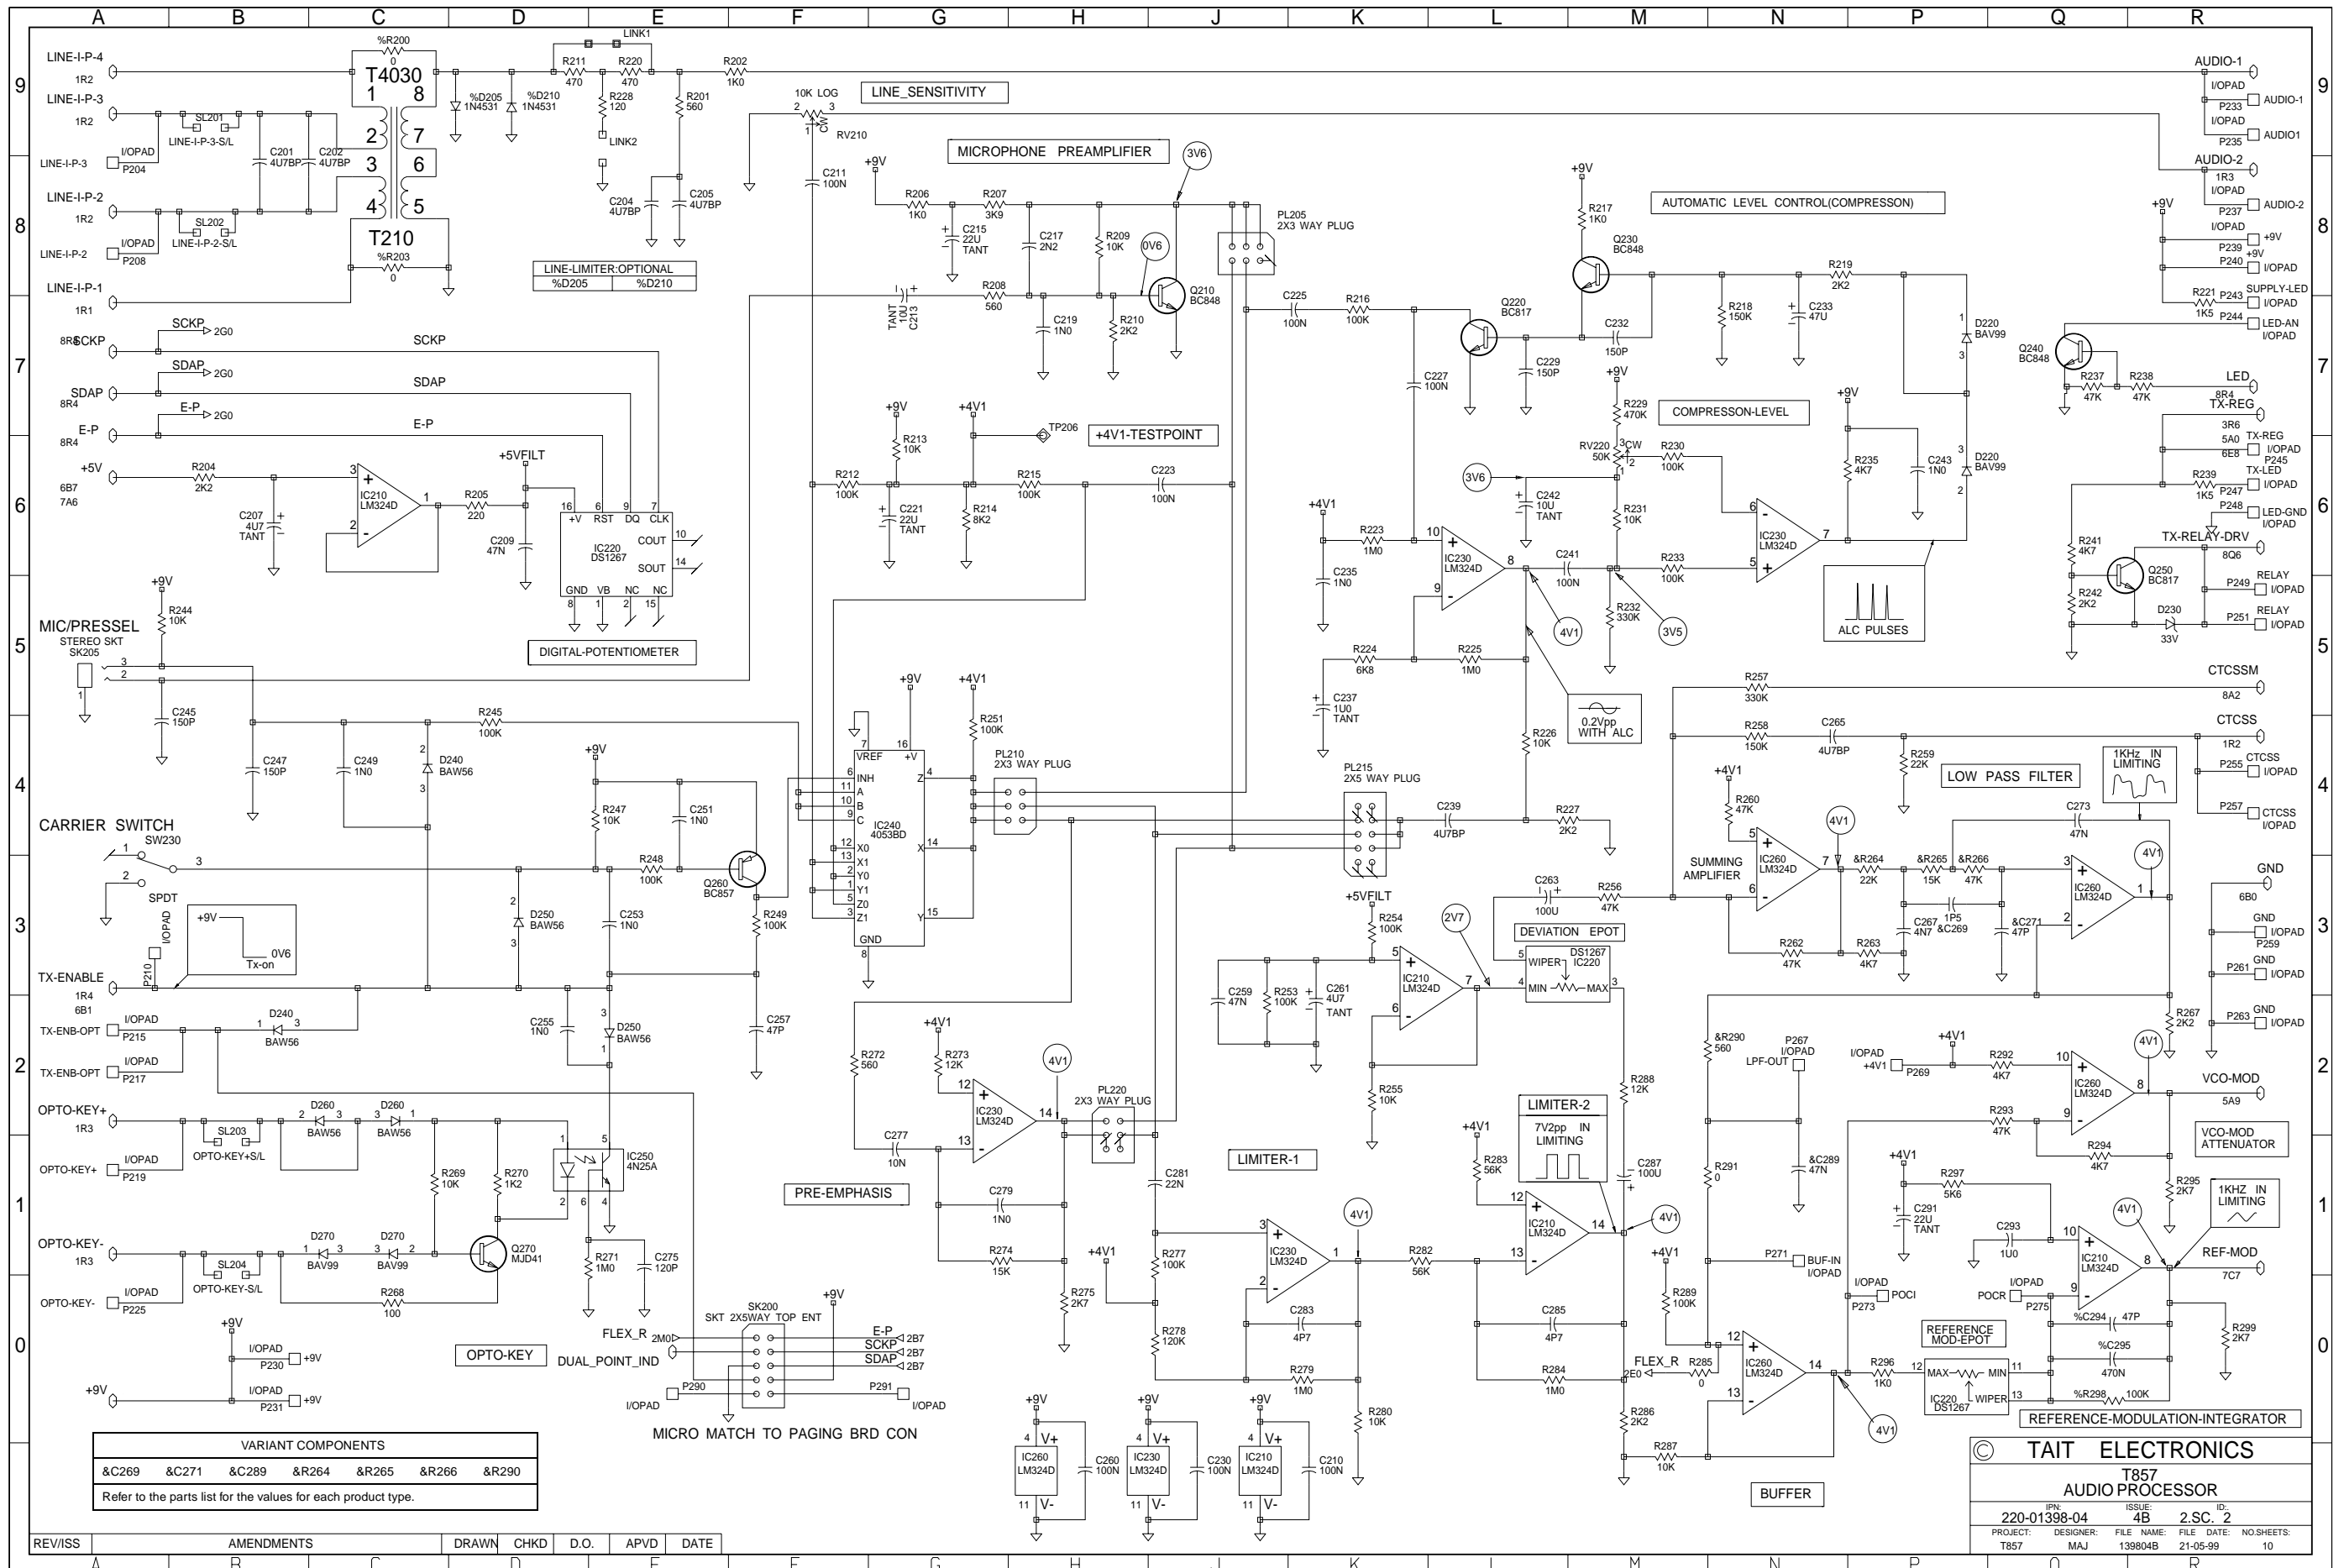


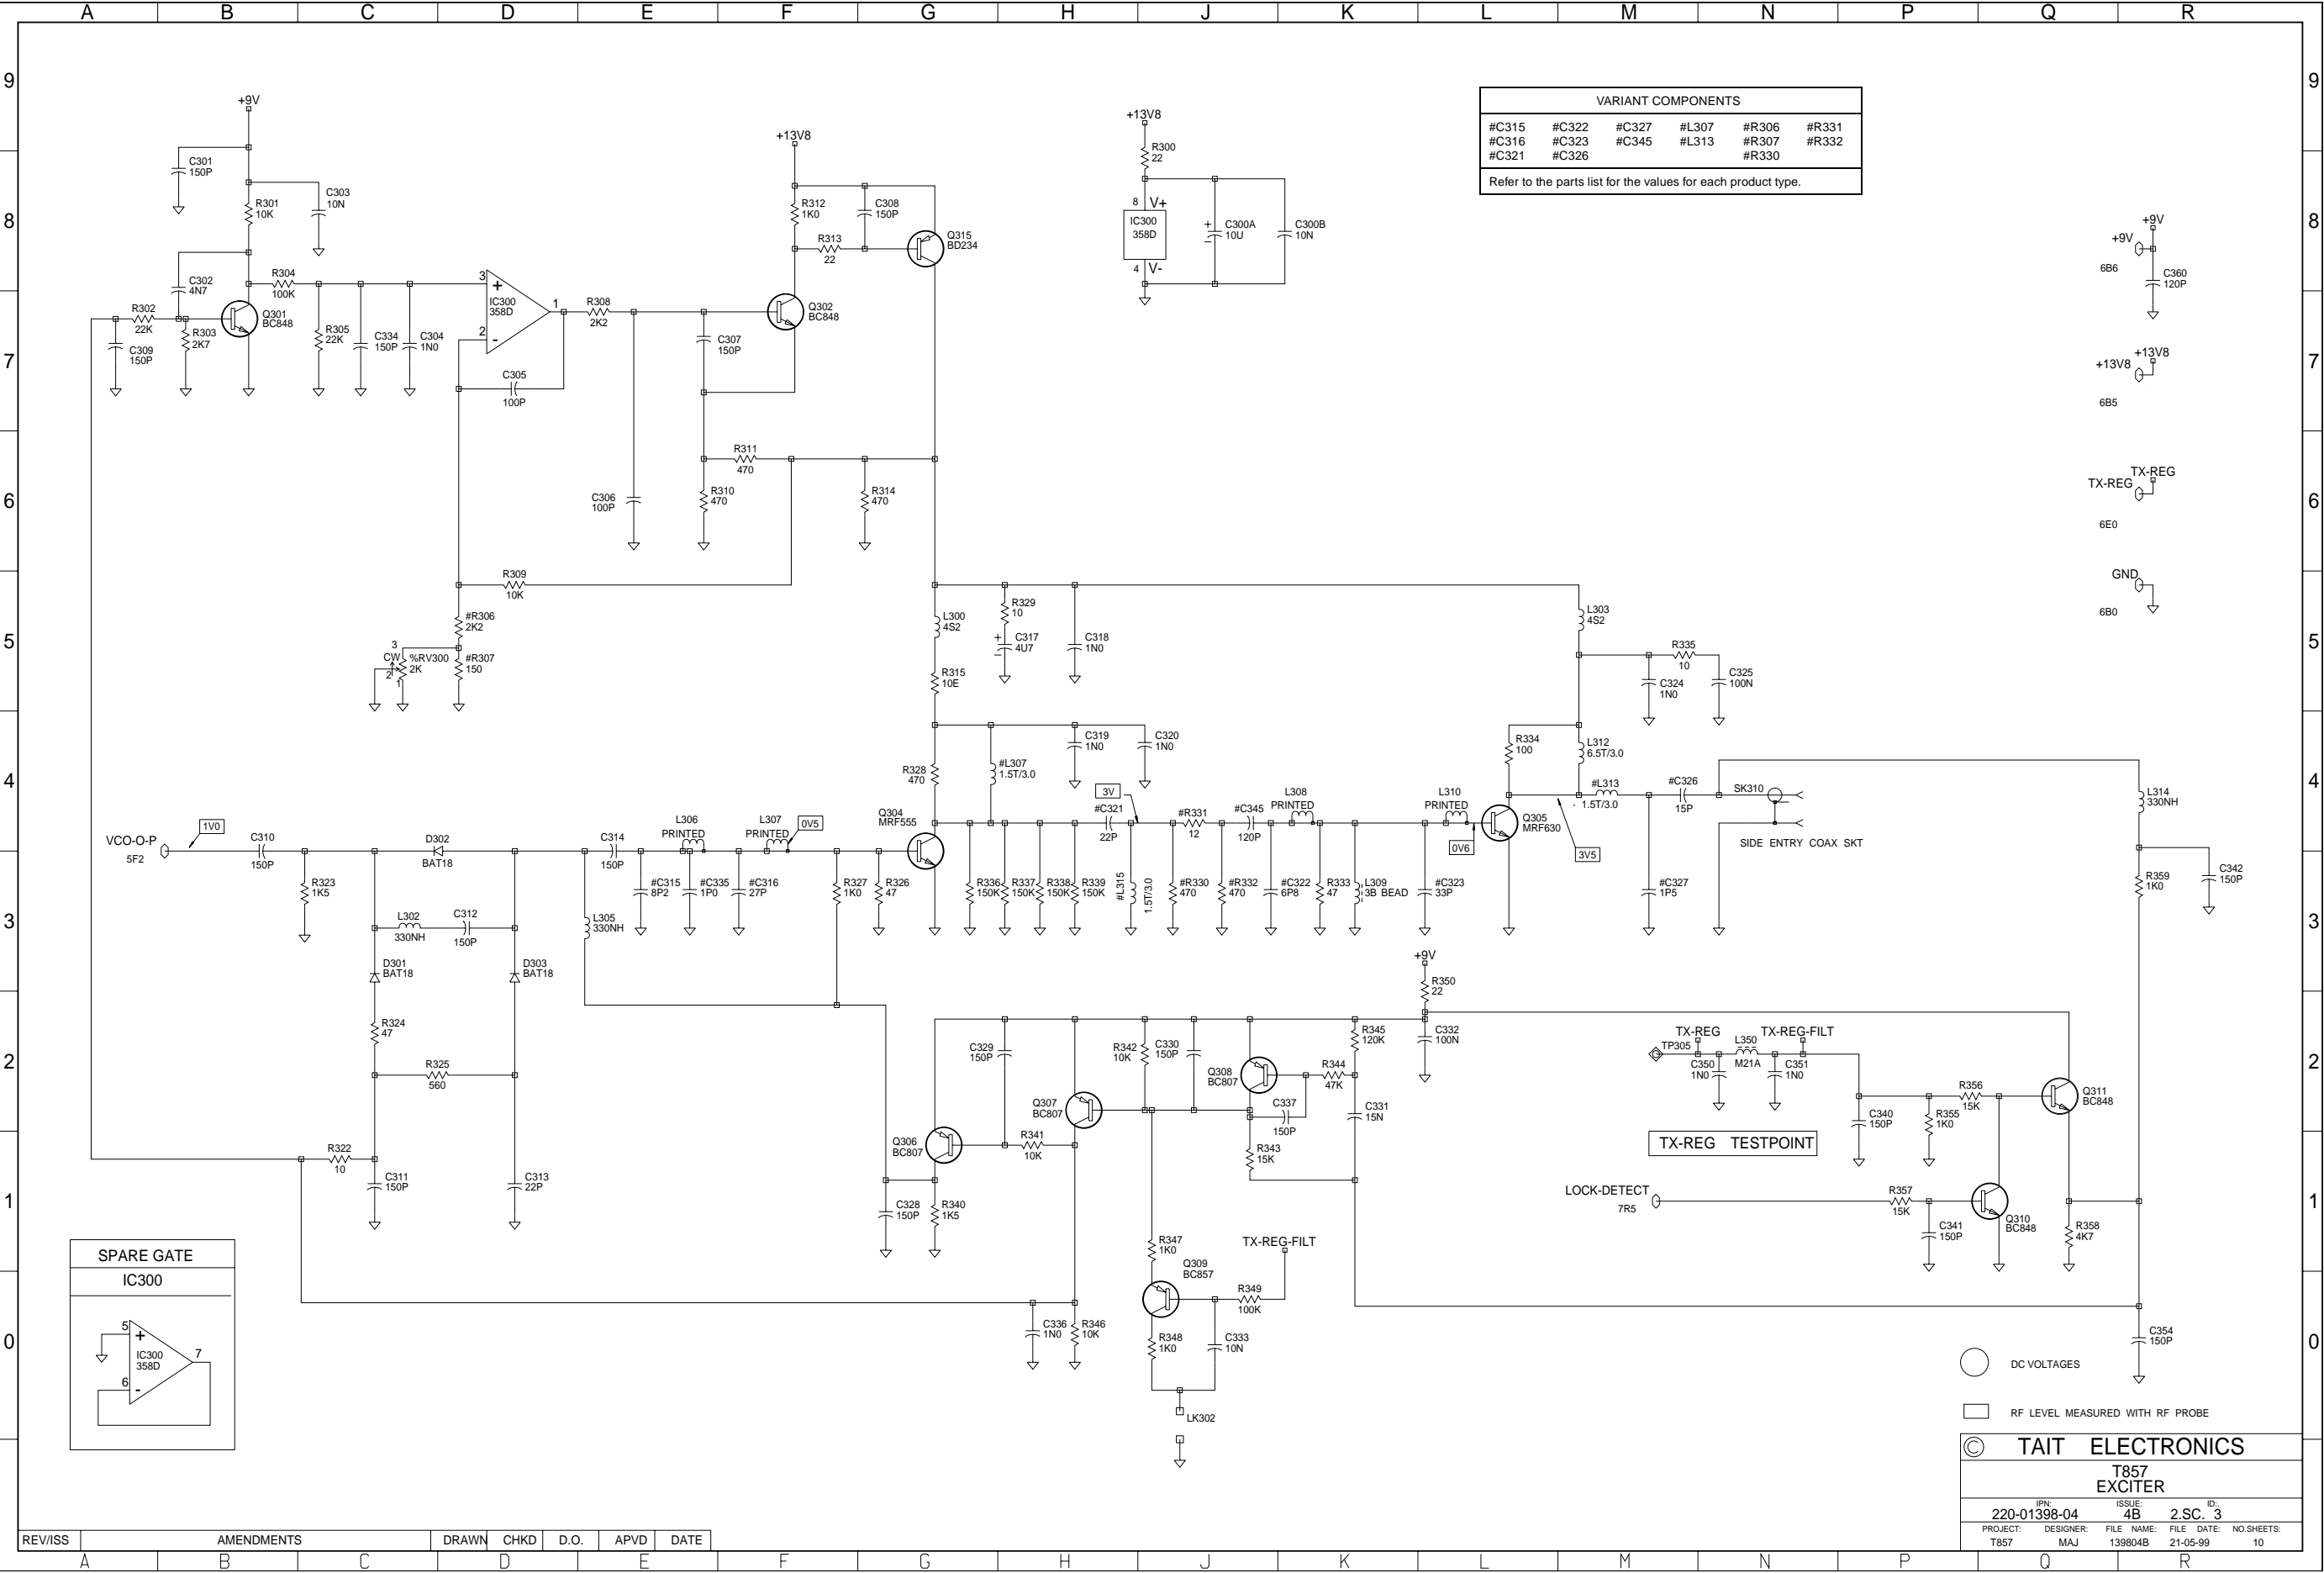

SK410 is the only component in this section
of the T857 circuitry and is shown on sheet 1.

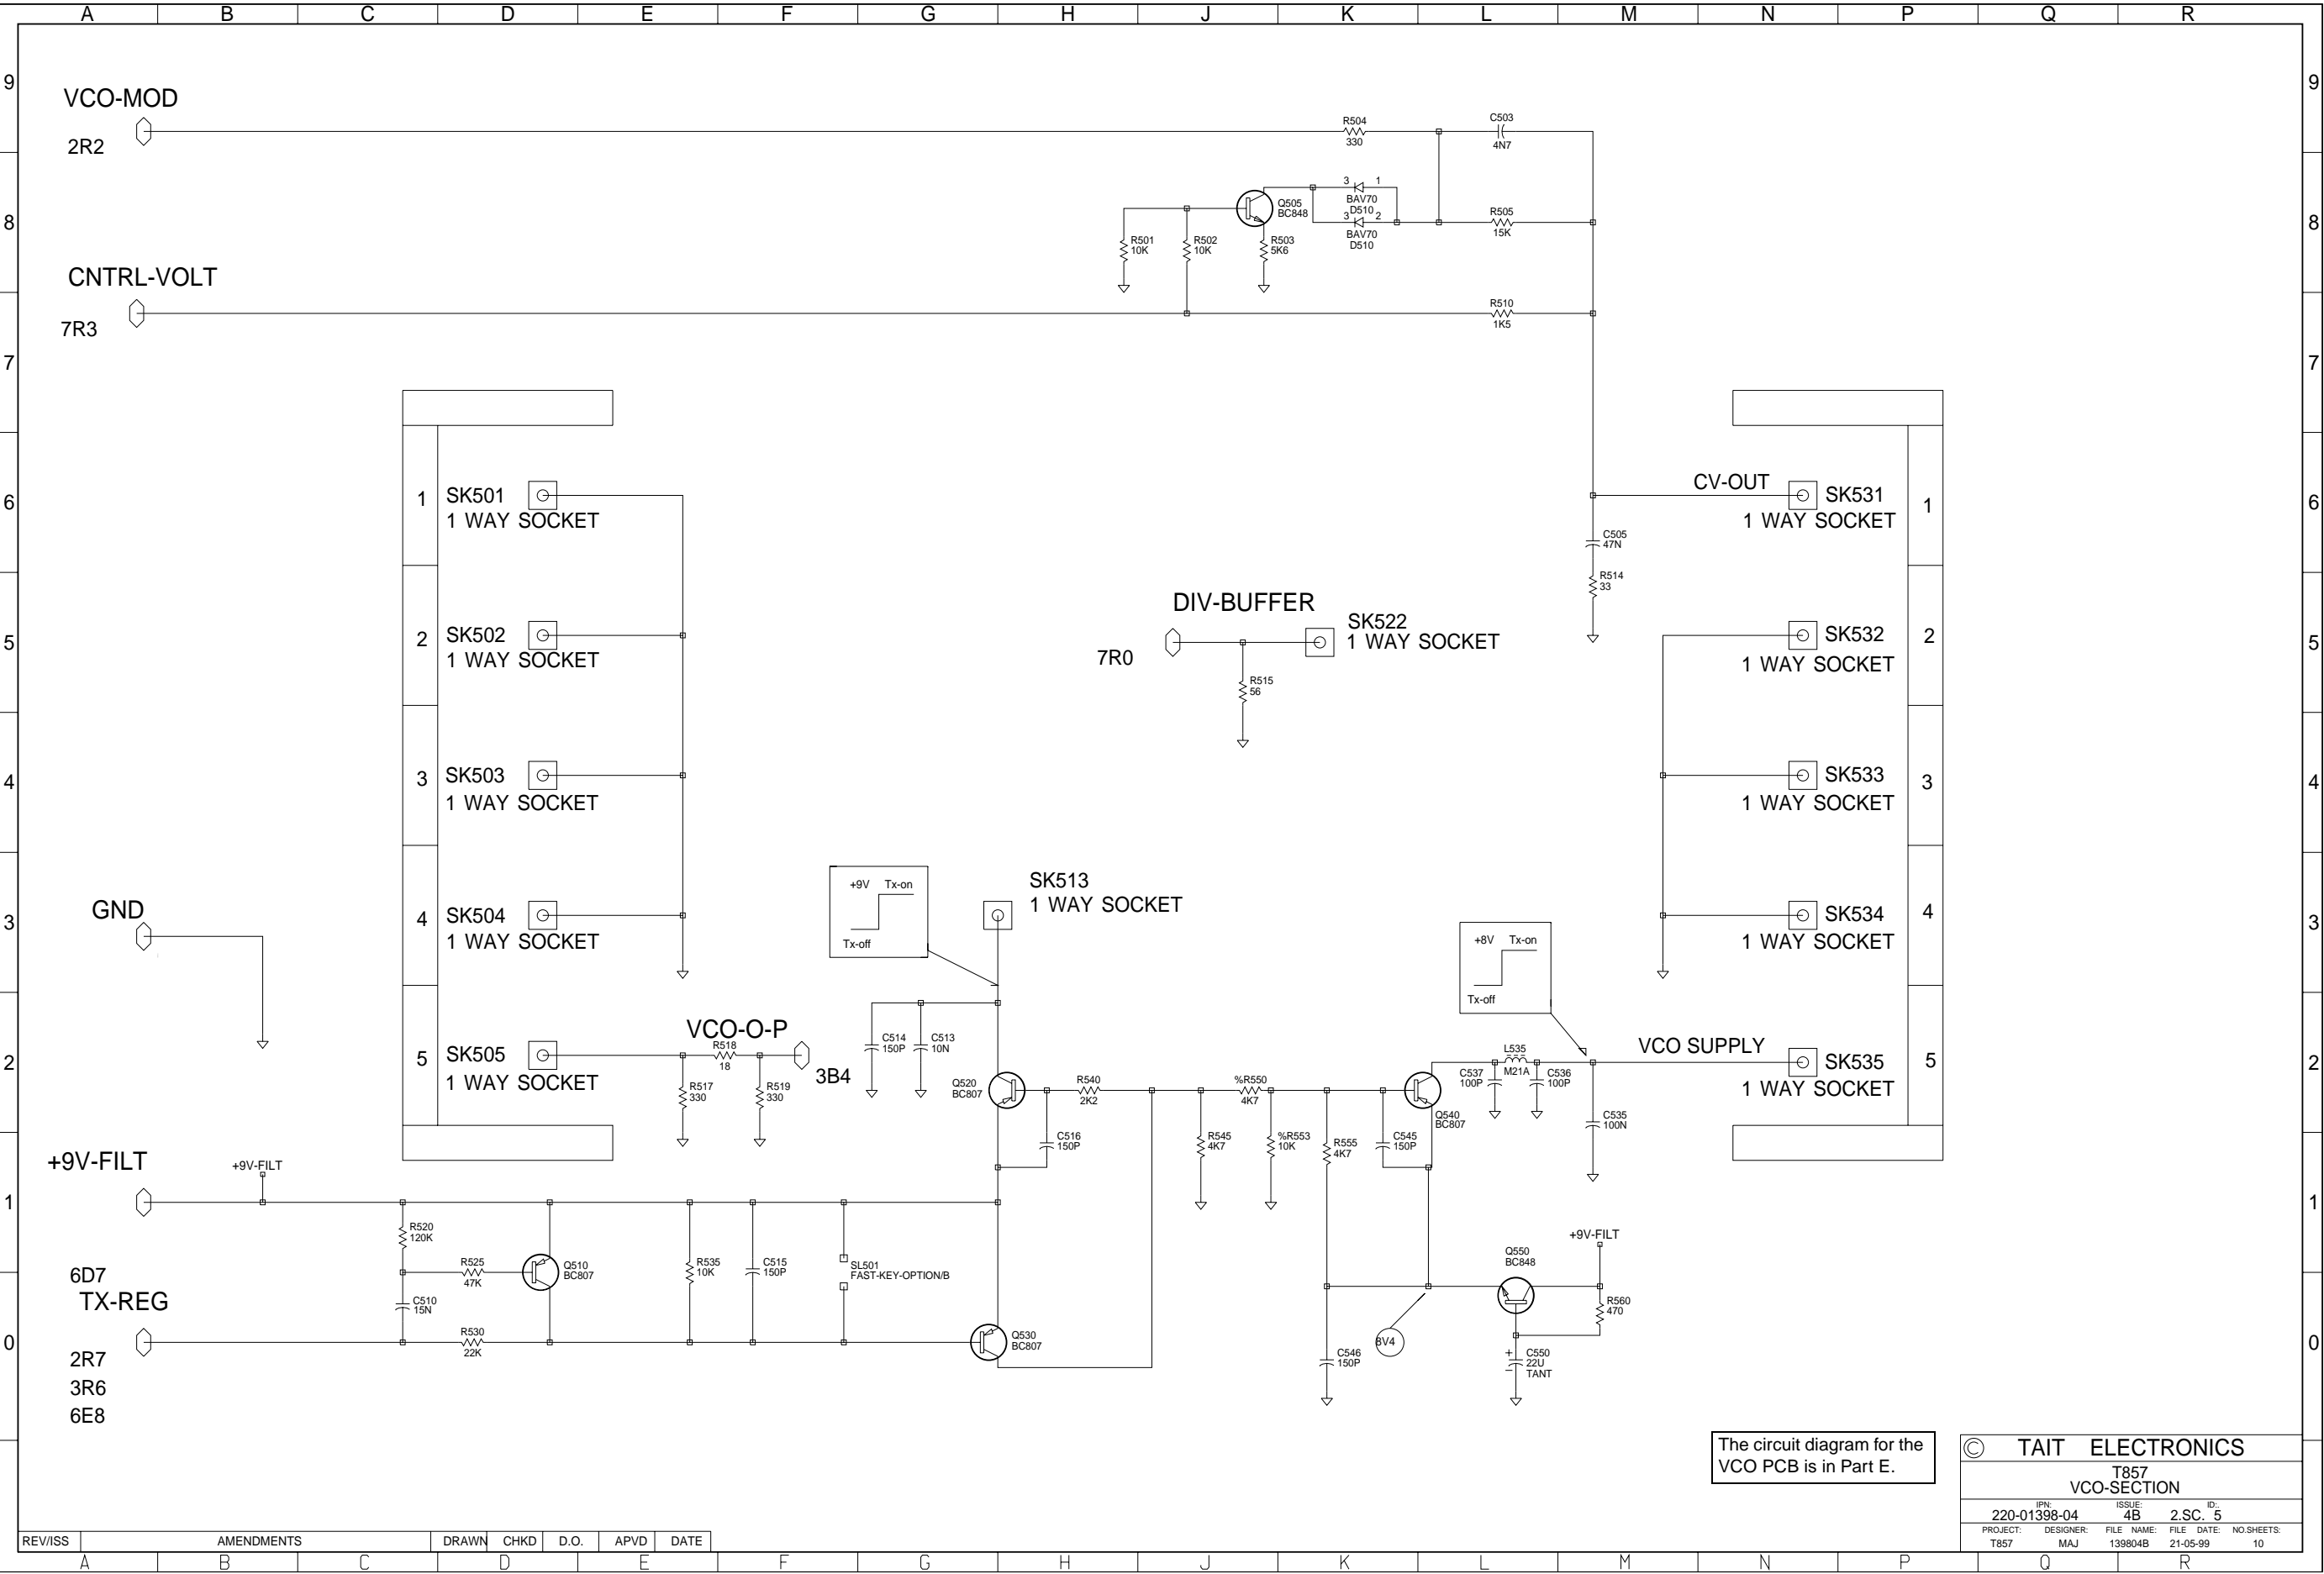

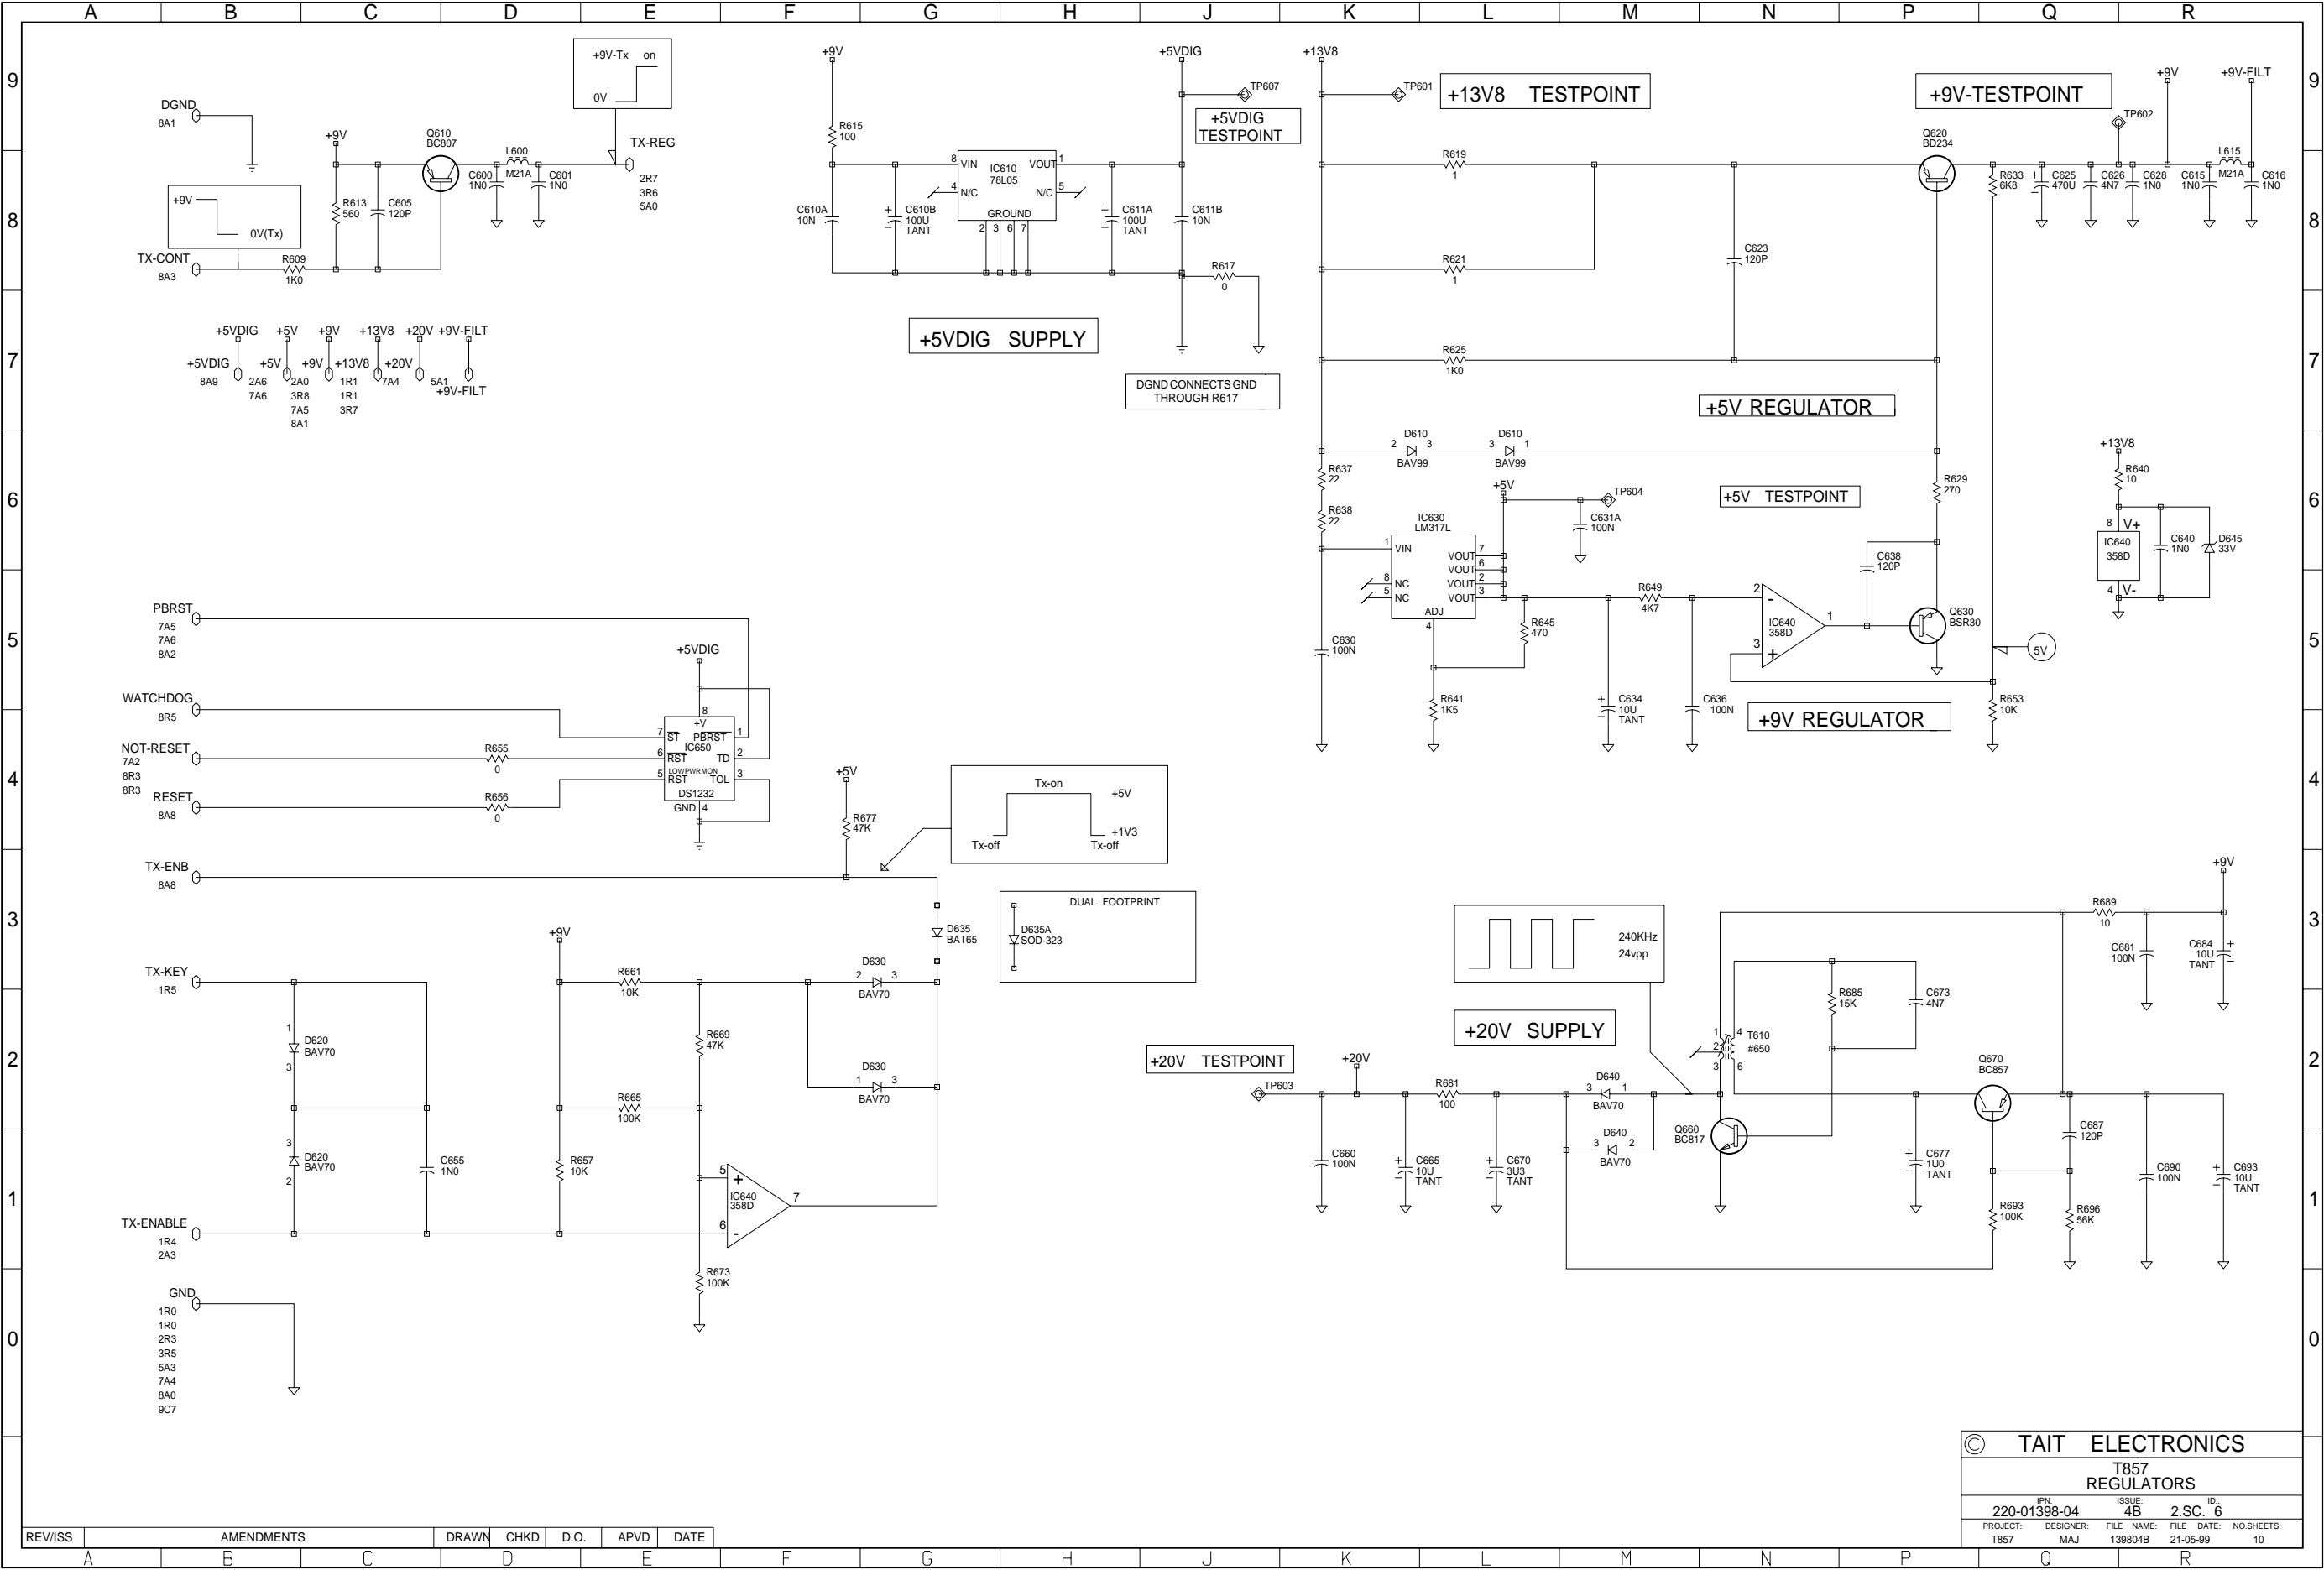

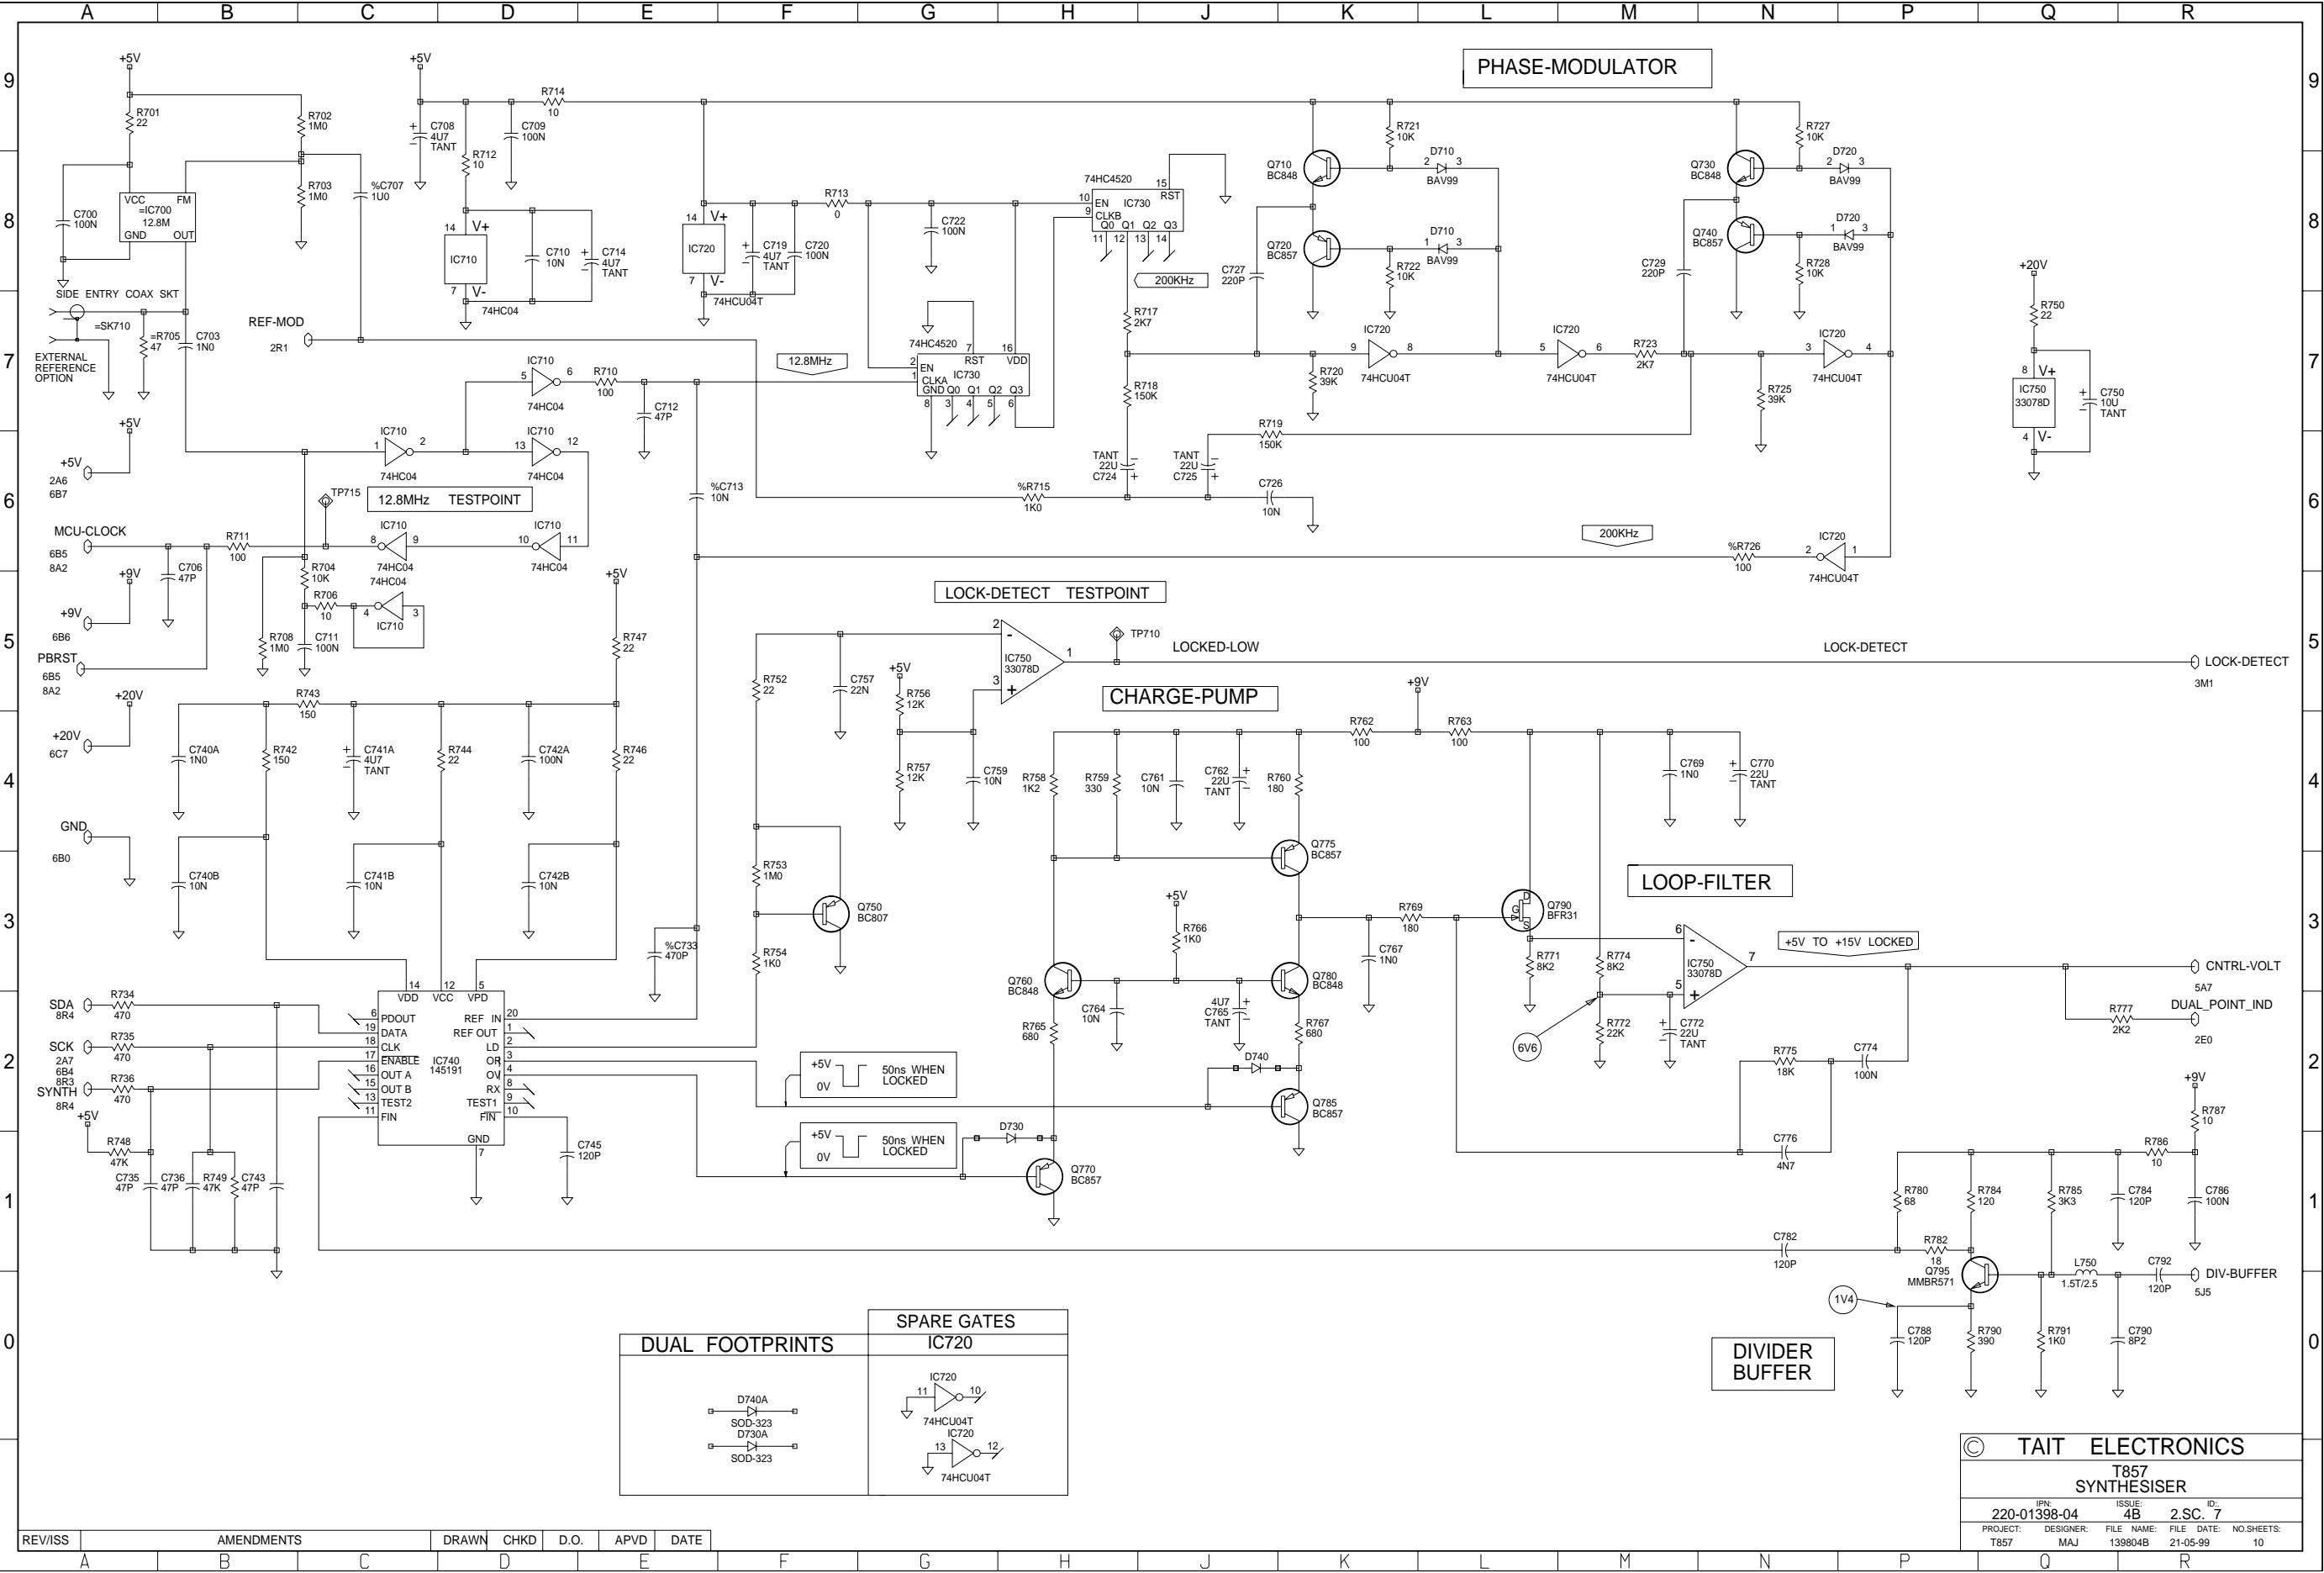

© TAIT ELECTRONICS

T857 SYNTHESISER

IPN: 220-01398-04	ISSUE: 4B	ID: 2.SC. 7
PROJECT: T857	DESIGNER: MAJ	FILE NAME: 139804B
FILE DATE: 21-05-99	NO. SHEETS: 10	

